

# THE ESSENTIAL ENTRELEC

SNK series terminal blocks  
DBL power distribution blocks

ENTRELEC Terminal Blocks

# The essential ENTRELEC

SNK series terminal blocks - DBL power distribution blocks

## SNK SERIES TERMINAL BLOCKS

The innovative range available in PI-Spring (Push-In and Spring), screw clamp and pluggable technologies with common accessories. Qualified for worldwide applications and severe environments such as hazardous locations, railways, marine and solar applications...

### Three technologies

**Screw clamp**  
PAGES 8-9

**PI-Spring**  
PAGES 4-5

**Pluggable**  
PAGES 12-13

### Applications



Industry



Commercial



Solar





Railways

## DBL POWER DISTRIBUTION BLOCKS

The exclusive compact and modular design of our power distribution blocks allows easy installation combined with a great flexibility of use.

### Screw clamp technology

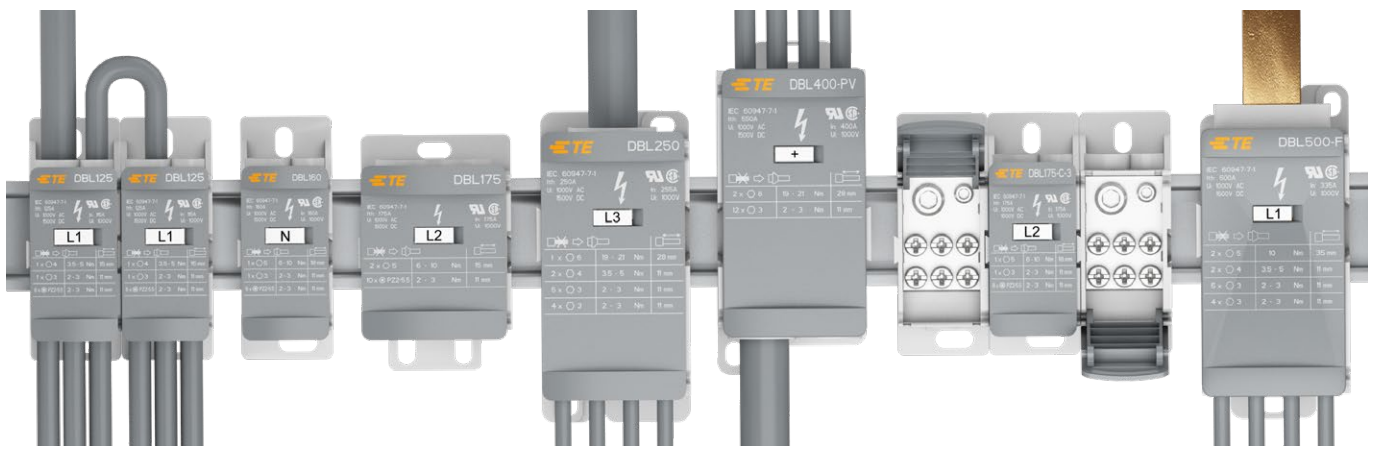

Screw clamp  
PAGES 18-19



Hazardous locations



Marine



Waste and Water

## SNK series, terminal blocks

PI-Spring technology - Range overview from 2.5 to 16 mm<sup>2</sup> - 12 to 4 AWG

### 2 Connections

#### Single deck

Feed-through  
Ground  
Disconnect  
Fuse  
Solar : 1500 VDC


**NEW**

### 3 Connections

#### Single deck

Feed-through  
Ground  
Solar: 1500 VDC

**NEW**

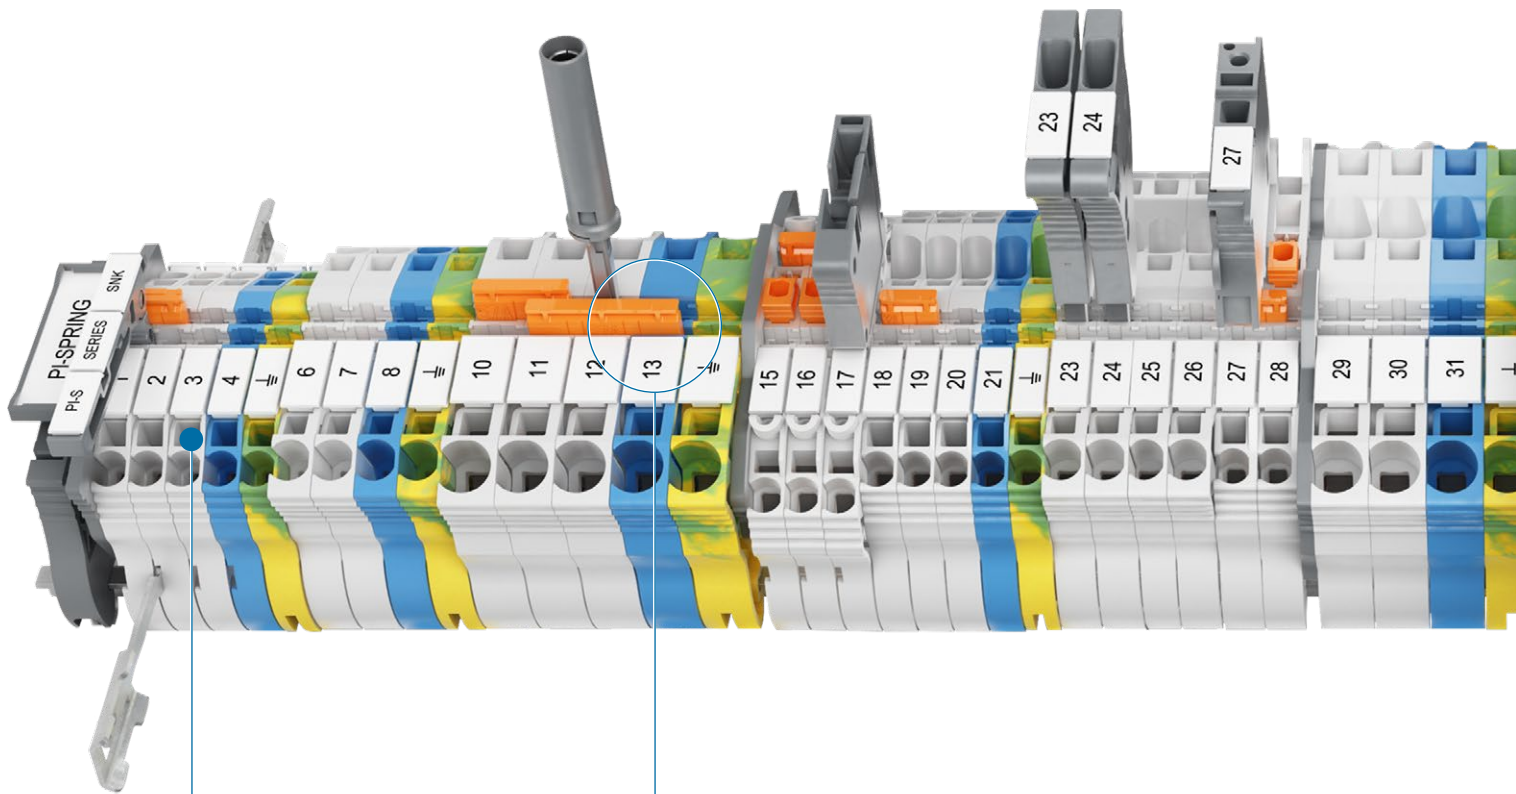

#### Voltage test

screwdriver entry  
point accepts  
Category II probes

#### Double central channels

allows multiconfigurations  
(jumping, testing and measuring)

4



Connections

**Single deck**

Feed-through  
Ground  
Disconnect  
Component holder

2x2




Connections

**Double deck**

Feed-through  
Ground  
Component holder


3x2



Connections

**Triple deck**

Feed-through  
Ground

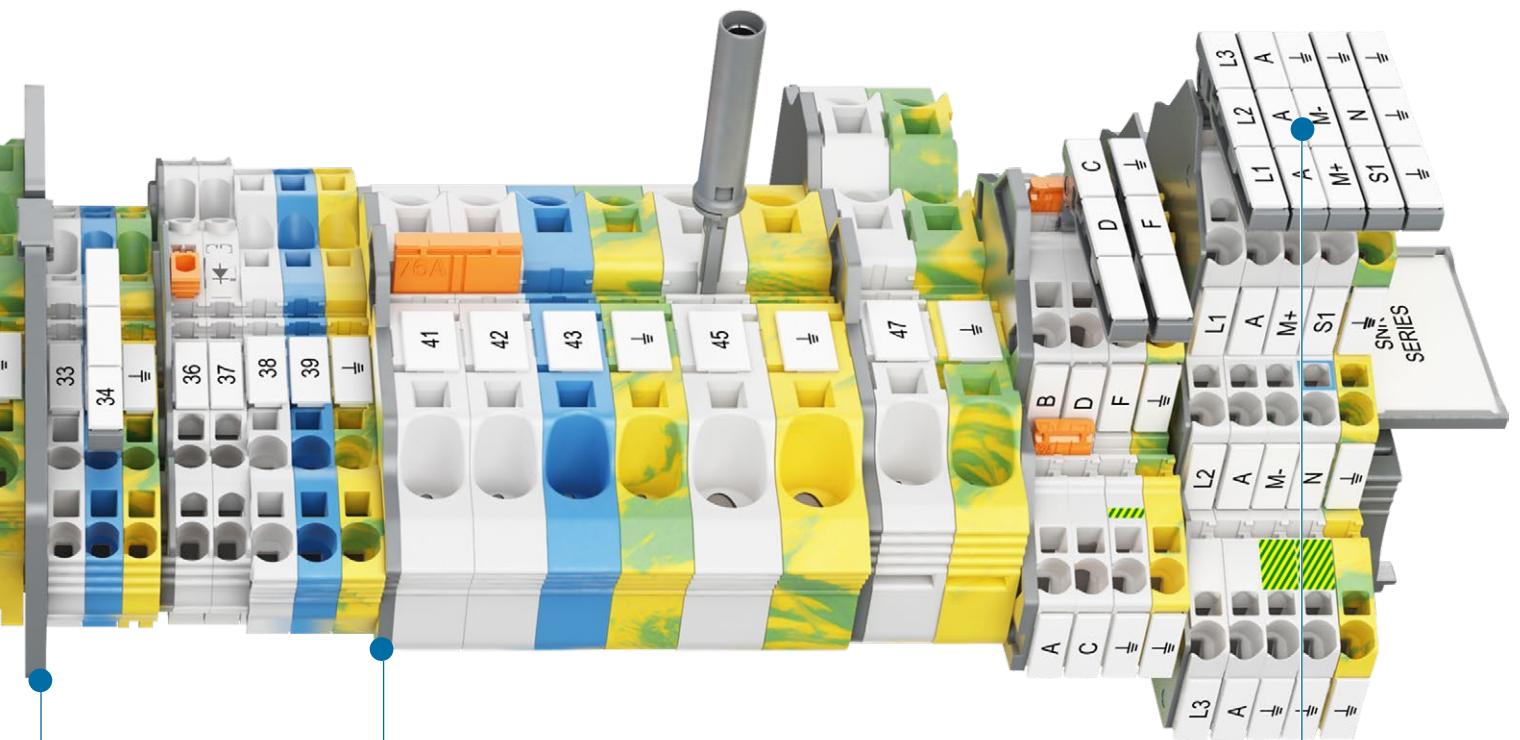

**Two circuit separators**


for the entire range

**End section**

can be used as circuit separator

**Rotating label holder**

easy plug-in in jumper channel

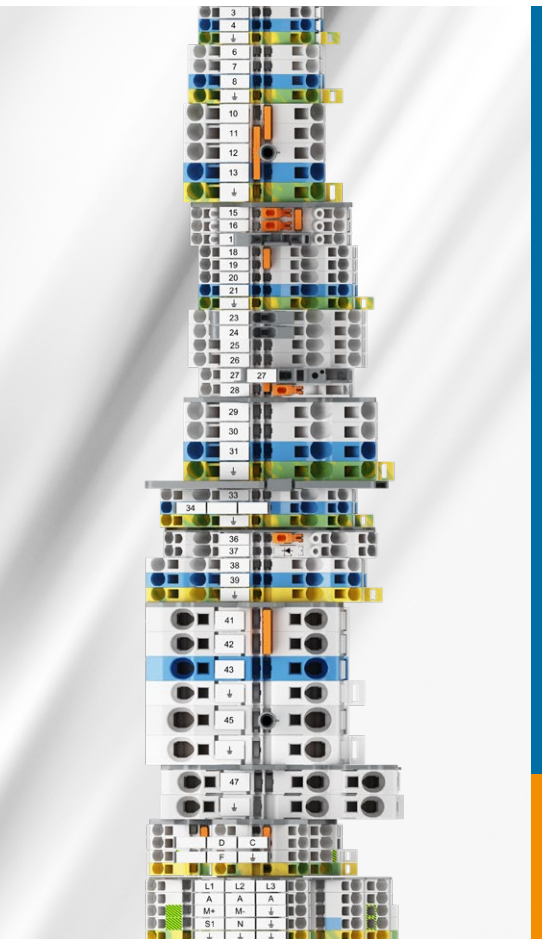

## SNK SERIES

### PI-Spring technology

Connection capacity: from 0.22 to 16 mm<sup>2</sup> - 14 to 4 AWG

### ENTRELEC Terminal Blocks

The patented PI-Spring technology provides the benefits of both Push-In and Spring technologies in one connection.

Qualified for worldwide markets, applications and for severe environments (including hazardous locations, railway, marine and solar applications etc.).



### Speed up your projects

#### Smart connections, higher productivity

Up to 90% mounting time reduction with our PI-Spring, screw clamp and pluggable technologies.

#### Simplified selection and design

Intuitive codification, simplified catalogs, large technical data base.

#### Better project identification

20% larger marking area.

Pre-mark by hand or label before final marker installation.



### Easy to install

#### Secured installation

Asymmetrical design avoid mounting and wiring errors.

Zero-retightening with our technologies.

#### Faster accessories mounting

Benefit from screwless ground connection, jumpers, end stops.

#### Smart design facilitating assembly process

Mounting, wiring, testing... made easy.



### Optimized logistics

#### 50% less accessories needed

End sections, circuit separators fit several blocks.

#### Common accessories

PI-Spring, screw and pluggable ranges share the same accessories.

#### Simplified inventory management

Significant reduction of part numbers to manage.



# SNK series, terminal blocks

PI-Spring technology

## Terminal blocks

Terminal blocks								End sections		Jumper bars								
		Cross section mm <sup>2</sup> / AWG	Spacing mm / in	Current IEC / UL	Function	Colour	Type	Part number	Part number	No. poles	Part number							
<b>2 connections</b>		2.5 / -	5.2 / 0.205	24 A		Grey	ZK2.5	1SNK705010R0000		2	1SNK905302R0000							
		2.5 / 14		20 A		Blue	ZK2.5-BL	1SNK705020R0000			3	1SNK905303R0000						
		4 / 12		300 A/1s 396 A/1s		Green-yellow	ZK2.5-PE	1SNK705150R0000			5	1SNK905305R0000						
		4 / -	6 / 0.236	32 A		Grey	ZK4	1SNK706010R0000				2	1SNK906302R0000					
		4 / 12		30 A		Blue	ZK4-BL	1SNK706020R0000					3	1SNK906303R0000				
		6 / 10		480 A/1s 636 A/1s		Green-yellow	ZK4-PE	1SNK706150R0000					5	1SNK906305R0000				
		6 / -	8 / 0.315	41 A		Grey	ZK6	1SNK708010R0000						2	1SNK908302R0000			
		6 / 10		50 A		Blue	ZK6-BL	1SNK708020R0000							3	1SNK908303R0000		
		10 / 8		720 A/1s 1008 A/1s		Green-yellow	ZK6-PE	1SNK708150R0000							5	1SNK908305R0000		
		10 / -	10 / 0.394	57 A		Grey	ZK10	1SNK710010R0000								2	1SNK910302R0000	
		10 / 8		65 A		Blue	ZK10-BL	1SNK710020R0000									3	1SNK910303R0000
		16 / 6		1200 A/1s 1596 A/1s		Green-yellow	ZK10-PE	1SNK710150R0000									5	1SNK910305R0000
16 / -	12 / 0.472	76 A		Grey	ZK16	1SNK712010R0000		2	1SNK912302R0000									
16 / 6		85 A		Blue	ZK16-BL	1SNK712020R0000			3	1SNK912303R0000								
25 / 4		1960 A/1s 2544 A/1s		Green-yellow	ZK16-PE	1SNK712150R0000			5	1SNK912305R0000								
<b>3 connections</b>		2.5 / -	5.2 / 0.205	24 A		Grey			ZK2.5-3P	1SNK705011R0000		2					1SNK905302R0000	
		2.5 / 14		20 A		Blue			ZK2.5-3P-BL	1SNK705021R0000							3	1SNK905303R0000
		4 / 12		300 A/1s 396 A/1s		Green-yellow			ZK2.5-PE-3P	1SNK705151R0000							5	1SNK905305R0000
		4 / -	6 / 0.236	32 A		Grey			ZK4-3P	1SNK706011R0000				2			1SNK906302R0000	
		4 / 12		30 A		Blue			ZK4-3P-BL	1SNK706021R0000							3	1SNK906303R0000
		6 / 10		480 A/1s 636 A/1s		Green-yellow			ZK4-PE-3P	1SNK706151R0000							5	1SNK906305R0000
		6 / -	8 / 0.315	41 A		Grey			ZK6-3P	1SNK708011R0000						2	1SNK908302R0000	
		6 / 10		50 A		Blue			ZK6-3P-BL	1SNK708021R0000							3	1SNK908303R0000
10 / 8	720 A/1s 1008 A/1s	Green-yellow		ZK6-PE-3P		1SNK708151R0000			5	1SNK908305R0000								
<b>4 connections</b>		2.5 / -	5.2 / 0.205	24 A		Grey	ZK2.5-4P	1SNK705012R0000		2	1SNK905302R0000							
		2.5 / 14		20 A		Blue	ZK2.5-4P-BL	1SNK705022R0000			3	1SNK905303R0000						
		4 / 12		300 A/1s 396 A/1s		Green-yellow	ZK2.5-PE-4P	1SNK705152R0000			5	1SNK905305R0000						
		4 / -	6 / 0.236	32 A		Grey	ZK4-4P	1SNK706012R0000				2	1SNK906302R0000					
		4 / 12		30 A		Blue	ZK4-4P-BL	1SNK706022R0000					3	1SNK906303R0000				
		6 / 10		480 A/1s 636 A/1s		Green-yellow	ZK4-PE-4P	1SNK706152R0000					5	1SNK906305R0000				
<b>Double deck</b>		2.5 / -	5.2 / 0.205	24 A		Grey	ZK2.5-D2	1SNK705210R0000		2			1SNK905302R0000					
		2.5 / 14		20 A		Blue	ZK2.5-D2-BL	1SNK705220R0000					3	1SNK905303R0000				
		4 / 12		20 A		Grey	ZK2.5-D1	1SNK705211R0000					5	1SNK905305R0000				
<b>Triple deck</b>		2.5 / -	5.2 / 0.205	22 A		Grey	ZK2.5-T3	1SNK705510R0000		2	1SNK905302R0000							
		2.5 / 14		20 A		Grey	ZK2.5-T1	1SNK705511R0000			3	1SNK905303R0000						
		4 / 12		20 A		Green-yellow	ZK2.5-L-L-PE	1SNK705512R0000			5	1SNK905305R0000						
		2.5 / -	5.2 / 0.205	22 A		Green-yellow	ZK2.5-L-L-PE	1SNK705512R0000				2	1SNK905302R0000					
		2.5 / 14		20 A		Blue	ZK2.5-L-N-PE	1SNK705513R0000					3	1SNK905303R0000				
		4 / 12		20 A		Green-yellow	ZK2.5-T1-PE	1SNK705550R0000					5	1SNK905310R0000				
<b>Disconnect</b>		2.5 / -	5.2 / 0.205	20 A		Grey	ZK2.5-S	1SNK705310R0000		2			1SNK905302R0000					
		2.5 / 14		20 A		Grey	ZK2.5-S	1SNK705310R0000					3	1SNK905303R0000				
		4 / 12		20 A		Grey	ZK2.5-S	1SNK705310R0000					5	1SNK905305R0000				
<b>Fuse</b>		2.5 / -	6 / 0.236	6.3 A		Grey, dark grey	ZK2.5-SF	1SNK706410R0000		2	1SNK906302R0000							
		2.5 / 14		16 A		Grey, dark grey	ZK2.5-SF	1SNK706410R0000			3	1SNK906303R0000						
		4 / 12		16 A		Grey, dark grey	ZK2.5-SF-R1	1SNK706411R0000			5	1SNK906305R0000						
<b>End stops</b>		5.2 / 0.205	Screwless, for single deck	BAZ1	1SNK900002R0000		2	1SNK905302R0000										
		10 / 0.394		Screw for single deck	BAM4			1SNK900001R0000	3	1SNK905303R0000								
<b>Pre-printed marking cards</b>		4.8 / 0.189	Horizontal	1->10 (x10)	MC512PA		2	1SNK900102R0000										
				1->100				1SNK140011R0000										
				1->10 (x10)				1SNK140012R0000										
				1->100				1SNK145011R0000										
				1->10 (x10)				1SNK145012R0000										
				1->100				1SNK150011R0000										
5.6 / 0.220	Horizontal	MC612PA	2	1SNK150012R0000														
				1->10 (x10)	1SNK155011R0000													
				1->10 (x10)	1SNK150011R0000													
				1->100	1SNK155012R0000													

- Flexible without ferrule
- Flexible with insulated ferrule
- Rigid Solid

## SNK series, terminal blocks

Screw clamp technology - Range overview from 4 to 240 mm<sup>2</sup> - 10 to 500 Kcmil



**2** Connections

### Single deck

Feed-through  
Ground  
Disconnect  
Fuse



**3** Connections

### Single deck


Feed-through  
Ground



**4** Connections

### Single deck

Feed-through  
Ground  
Disconnect

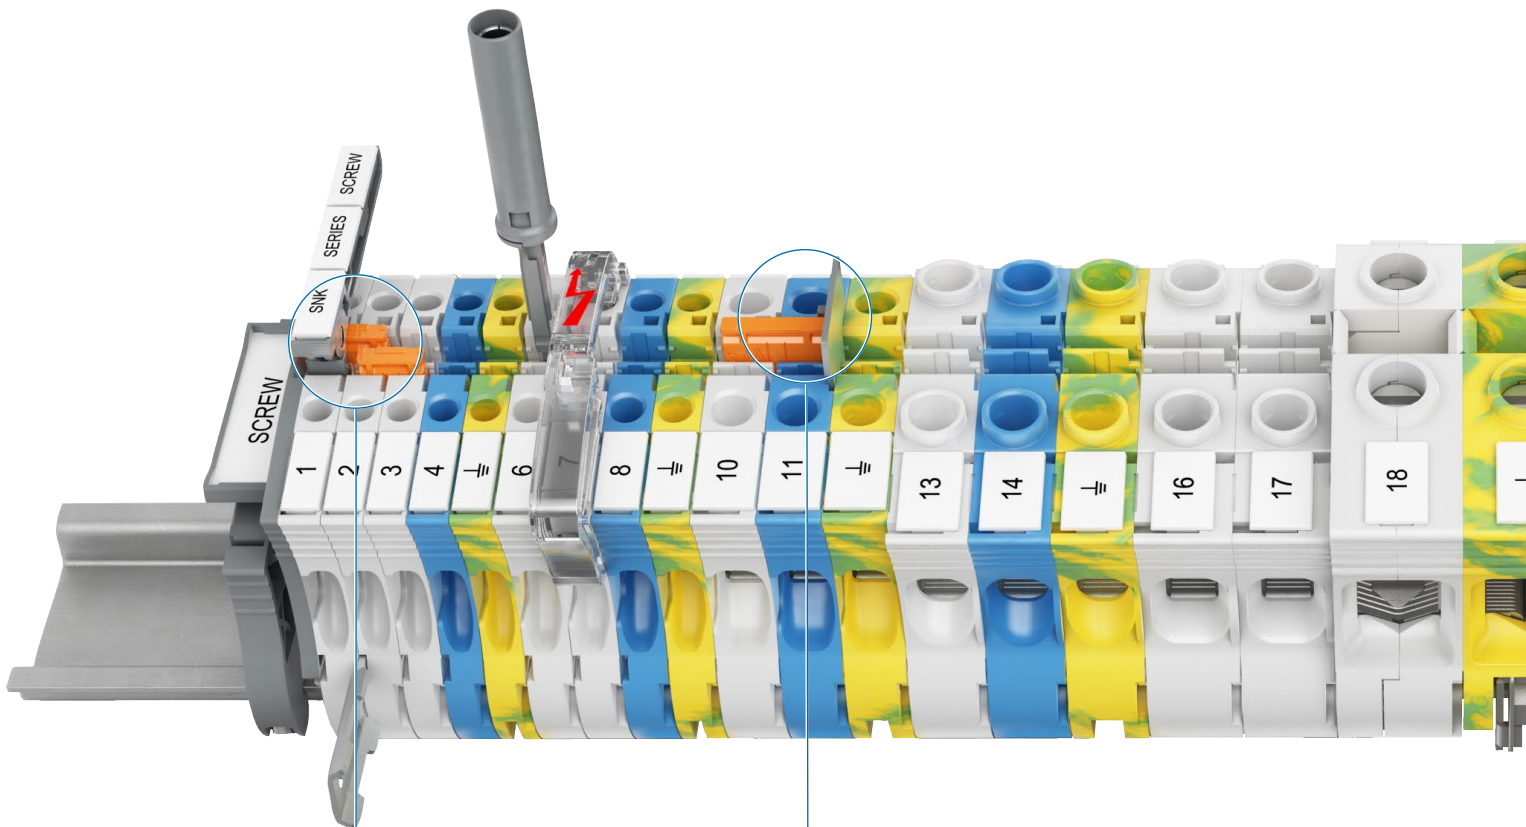

**Double central channels**  
allows multiconfigurations  
(jumping, testing and  
measuring)

**Circuit separator**  
without spacing loss



**2x2**  Connections


- Double deck
- Feed-through
- Ground
- Disconnect
- Fuse
- Component holder

**2**  Connections


- Test and measurement
- Feed-through
- Ground
- Disconnect

**3x2**  Connections

- Triple deck
- Feed-through

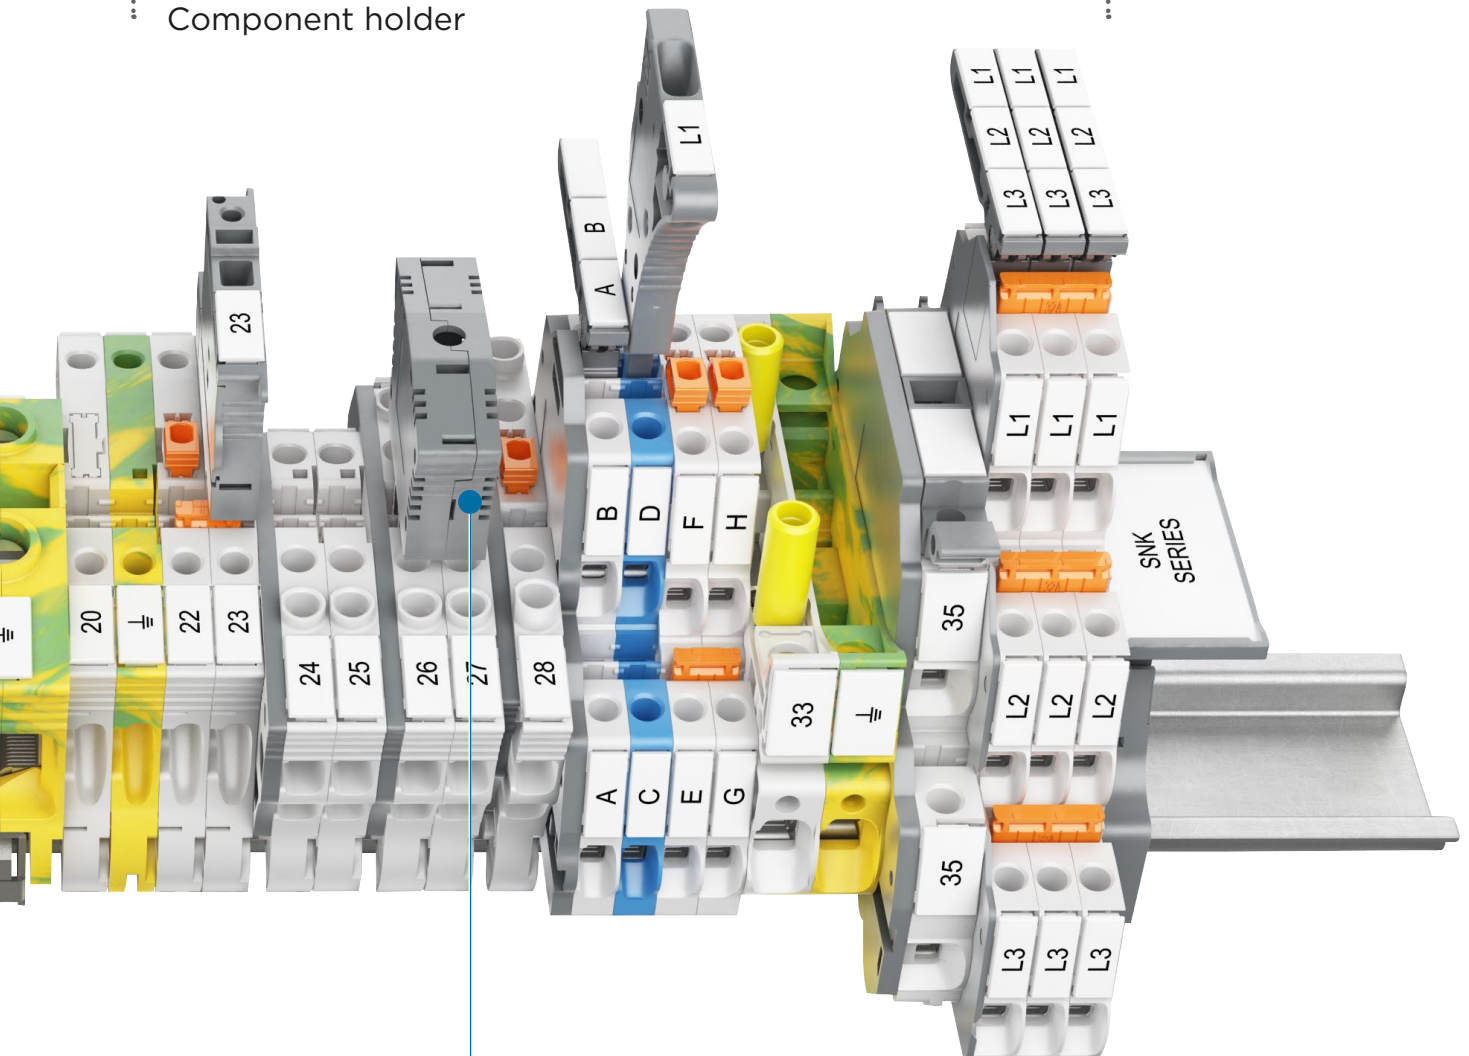

**Plug**  
component holder

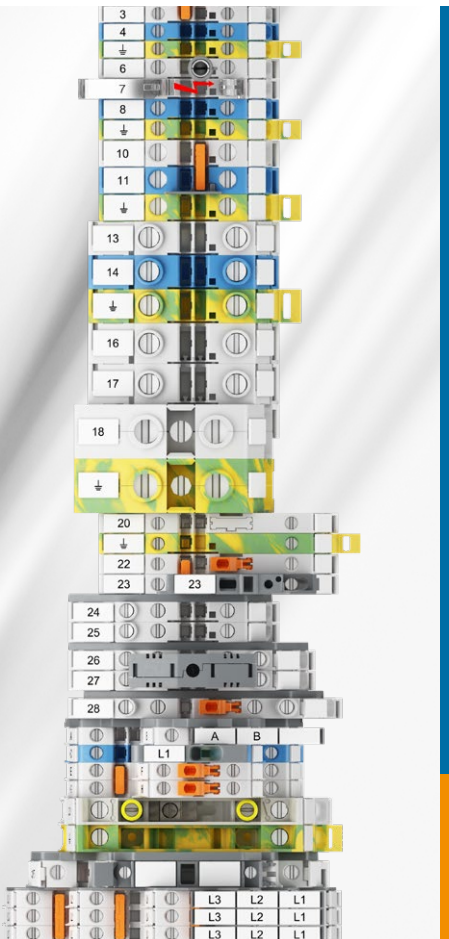

## SNK SERIES

### Screw clamp technology

Connection capacity: from 0.22 to 240 mm<sup>2</sup> - 14 to 500 Kcmil

### ENTRELEC Terminal Blocks

The SNK series screw clamp terminal blocks offer rationalized functions and accessories while serving a large scope of applications. Qualified for worldwide markets, applications and for severe environments (including hazardous locations, marine and solar applications etc.).



### Speed up your projects

#### Smart connections, higher productivity

Up to 90% mounting time reduction with our PI-Spring, screw clamp and pluggable technologies.

#### Simplified selection and design

Intuitive codification, simplified catalogs, large technical data base.

#### Better project identification

20% larger marking area.  
Pre-mark by hand or label before final marker installation.



### Easy to install

#### Secured installation

Asymmetrical design avoid mounting and wiring errors.

Zero-retightening with our technologies.

#### Faster accessories mounting

Benefit from screwless ground connection, jumpers, end stops.

#### Smart design facilitating assembly process

Mounting, wiring, testing... made easy.



### Optimized logistics

#### 50% less accessories needed

End sections, circuit separators fit several blocks.

#### Common accessories

PI-Spring, screw and pluggable ranges share the same accessories.

#### Simplified inventory management

Significant reduction of part numbers to manage.



# SNK series, terminal blocks

Screw clamp technology

## Terminal blocks

Terminal blocks								End sections		Jumper bars					
	Cross section mm <sup>2</sup> / AWG	Spacing mm / in	Current IEC / UL	Function	Colour	Type	Part number	Part number	No. poles	Part number					
<b>Single deck</b>	4 / -	5.2 / 0.205	32 A		Grey	ZS4	1SNK505010R0000		2	1SNK905302R0000					
	2.5 / 14		20 A		Blue	ZS4-BL	1SNK505020R0000		3	1SNK905303R0000					
	4 / 12		480 A / 1s		Green/yellow	ZS4-PE	1SNK505150R0000		5	1SNK905305R0000					
	6 / -	6 / 0.236	30 A		Grey	ZS6	1SNK506010R0000		2	1SNK906302R0000					
	4 / 12		720 A / 1s		Blue	ZS6-BL	1SNK506020R0000		3	1SNK906303R0000					
	6 / 10		636 A / 1s		Green/yellow	ZS6-PE	1SNK506150R0000		5	1SNK906305R0000					
	10 / -	8 / 0.315	57 A		Grey	ZS10	1SNK508010R0000			2	1SNK908302R0000				
	6 / 10		42 A		Blue	ZS10-BL	1SNK508020R0000			3	1SNK908303R0000				
	10 / 8		1200 A / 1s		Green/yellow	ZS10-PE	1SNK508150R0000			5	1SNK908305R0000				
	16 / -	10 / 0.394	76 A		Grey	ZS16	1SNK510010R0000				2	1SNK910302R0000			
	10 / 8		67 A		Blue	ZS16-BL	1SNK510020R0000				3	1SNK910303R0000			
	16 / 6		1920 A / 1s		Green/yellow	ZS16-PE	1SNK510150R0000				5	1SNK910305R0000			
	25 / -	12 / 0.472	101 A		Grey	ZS25	1SNK512010R0000					2	1SNK912302R0000		
	16 / 6		100 A		Blue	ZS25-BL	1SNK512020R0000					3	1SNK912303R0000		
	25 / 4		1920 A / 1s		Green/yellow	ZS25-PE	1SNK512150R0000					5	1SNK912305R0000		
	35 / -	16 / 0.630	125 A		Grey	ZS35	1SNK516010R0000						2	1SNK916302R0000	
	35 / 0		150 A		Blue	ZS35-BL	1SNK516020R0000						3	1SNK916303R0000	
	35 / 0		4200 A / 1s		Green/yellow	ZS35-PE	1SNK516150R0000						5	1SNK916305R0000	
	50 / -	16 / 0.630	150 A		Grey	ZS50	1SNK516011R0000							2	1SNK916302R0000
	50 / 0		150 A		Blue	ZS50-BL	1SNK516021R0000							3	1SNK916303R0000
50 / 0	6000 A / 1s		Green/yellow		ZS50-PE	1SNK516151R0000	5	1SNK916305R0000							
70 / -	22 / 0.866	192 A		Grey	ZS70	1SNK522010R0000		2						1SNK922302R0000	
50 / -		159 A		Blue	ZS70-BL	1SNK522020R0000		3						1SNK922303R0000	
95 / 00		8400 A / 1s		Green/yellow	ZS70-PE	1SNK522150R0000		5						1SNK922305R0000	
95 / -	26 / 1.024	232 A		Grey	ZS95	1SNK526010R0000								2	1SNK926302R0000
50 / -		230 A		Blue	ZS95-BL	1SNK526020R0000								3	1SNK926303R0000
120 / 0000		11400 A / 1s		Green/yellow	ZS95-PE	1SNK526150R0000			5					1SNK926305R0000	
120 / 0000	12840 A / 1s								10					1SNK926310R0000	
<b>Double deck</b>	4 / -	5.2 / 0.205	29 A		Grey	ZS4-D2			1SNK505210R0000						2
	2.5 / 14		20 A		Blue	ZS4-D2-BL			1SNK505220R0000	3					1SNK905303R0000
	4 / 12									5					1SNK905305R0000
	6 / -	6 / 0.236	40 A		Grey	ZS6-D2			1SNK506210R0000	2					1SNK906302R0000
	4 / 12		30 A		Blue	ZS6-D2-BL			1SNK506220R0000	3	1SNK906303R0000				
6 / 10						5			1SNK906305R0000						
<b>Triple deck</b>	4 / -	5.2 / 0.205	32 A		Grey	ZS4-T3			1SNK505212R0000		2			1SNK905302R0000	
	2.5 / 14		20 A								3	1SNK905303R0000			
	4 / 12										5	1SNK905305R0000			
	4 / -	6 / 0.236	32 A		Grey	ZS4-T3-R1			1SNK506213R0000		2	1SNK906302R0000			
	4 / 12		30 A								3	1SNK906303R0000			
4						5			1SNK906305R0000						
<b>Disconnect</b>	4 / -	5.2 / 0.205	25 A		Grey	ZS4-S			1SNK505310R0000		2	1SNK905310R0000			
	2.5 / 14														
	4 / 12														
	4 / -														
	2.5 / 14	6 / 0.236	30 A		Grey	ZS4-S-T2	1SNK505311R0000		3		1SNK906303R0000				
	4 / 12														
	6 / -														
	4 / 12														
6 / 10	8 / 0.315	42 A		Grey	ZS6-S	1SNK506315R0000			5	1SNK906305R0000					
10 / -															
6 / 10															
10 / 8															
<b>Fuse</b>	4 / -	8 / 0.315	6.3 A		Grey, dark grey	ZS4-SF1		1SNK508410R0000		2	1SNK908302R0000				
	4 / 12				10 A										
	4 / 12														
<b>End stops</b>	5.2 / 0.205					BAZ1		1SNK900002R0000							
	10 / 0.394					BAM4	1SNK900001R0000								
	10 / 0.394					BAZH1	1SNK900102R0000								
<b>Pre-printed marking cards</b>		4.8 / 0.189	Horizontal	1->10 (x10)		MC512PA	1SNK140011R0000		2	1SNK905302R0000					
				1->100			1SNK145011R0000								
				Vertical			1->10 (x10)				1SNK140012R0000				
		5.6 / 0.220	Horizontal	1->100	MC612PA	1SNK145012R0000									
				1->10 (x10)		1SNK150011R0000									
				1->100		1SNK155011R0000									
Vertical	1->10 (x10)	1SNK150012R0000													
1->100	1SNK155012R0000														

- Flexible without ferrule
- Flexible with insulated ferrule
- Rigid Solid

## SNK series, terminal blocks

Pluggable technology - Range overview from 2.5 to 4 mm<sup>2</sup> - 12 to 10 AWG

### Pluggable Pluggable


**2**

Connections  
Single deck  
Feed-through

**4**

Connections  
Single deck  
Feed-through  
Ground

### PI-Spring Pluggable



### PI-Spring Pluggable

**2**

Connections  
Single deck  
Feed-through  
Ground


**3**

Connections  
Single deck  
Feed-through

**4**


Connections  
Single deck  
Feed-through  
Ground

### Plugs

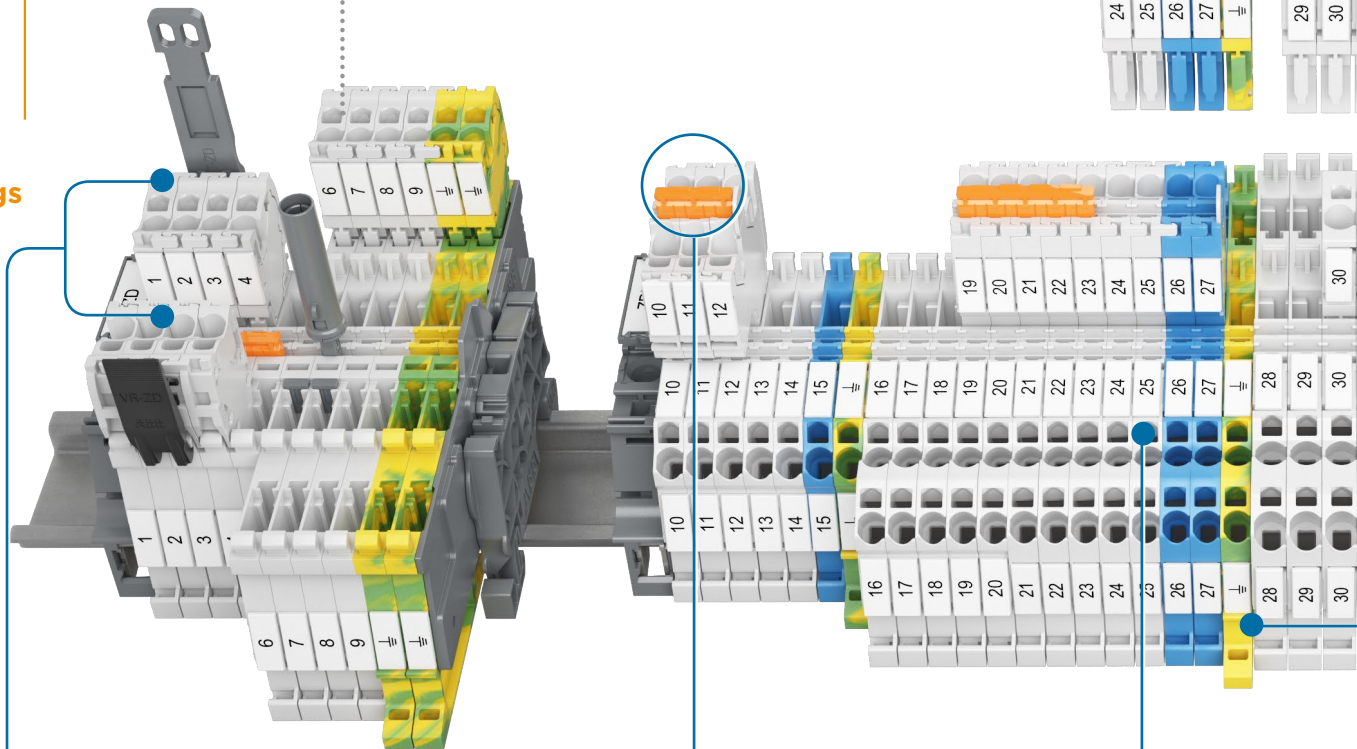

### Compact plug

Save up to 15%  
in height



### Reduced plug variants

Only two plugs variants  
to create assemblies




### Jumper plugs

Plugs with 1 or 2 connection  
& jumper to ease potential  
distribution

### Voltage test

Screwdriver entry point  
accepts category II probes

## Screw clamp Pluggable




# 4

Connections  
Single deck  
Feed-through

# 2x2

Connections  
Double deck  
Feed-through  
Ground

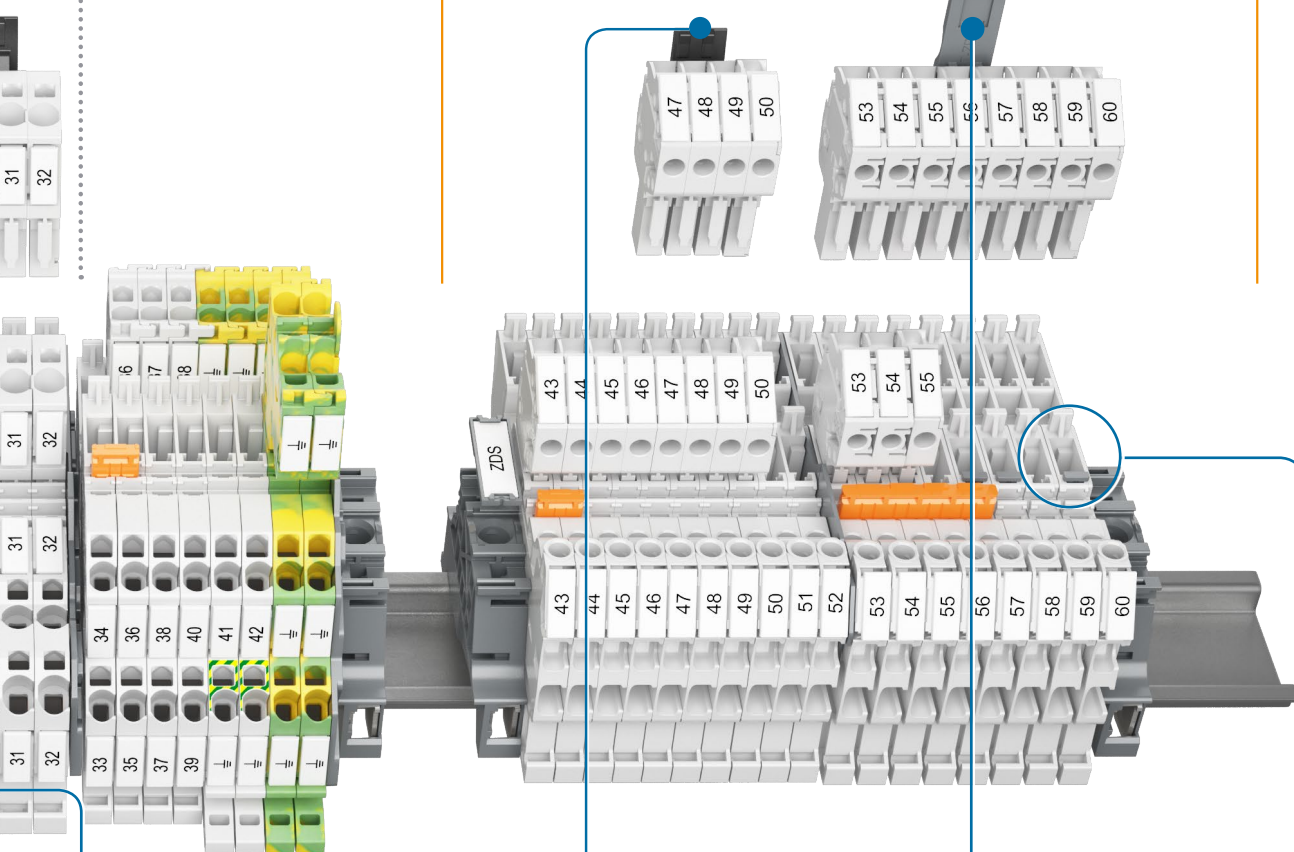

### End section

No need of end section between 2.5 and 4 mm<sup>2</sup> terminal blocks

### Cable clamp


Secure the wires onto the plug when pulling the plug assembly

### Locking device



Secure plug and wiring against accidental pulling

### Convenient coding pegs

Guarantee error free plugs insertion



15NKT164013S0201

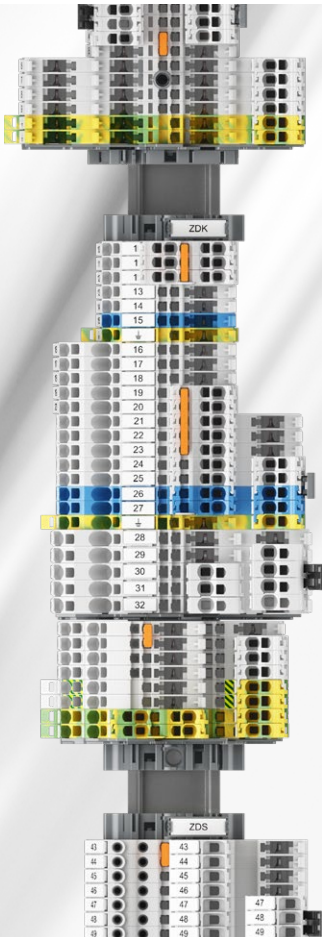

## SNK SERIES

### Pluggable Technology

Connection capacity: from 2.5 to 4 mm<sup>2</sup> – 12 to 10 AWG

#### ENTRELEC Terminal Blocks

The SNK series pluggable terminal blocks combine the benefits of our smart connections with the flexibility of the pluggable function. Qualified for worldwide markets, applications and for severe environments (including hazardous locations, marine and solar applications etc.).



#### Speed up your projects

##### Smart connections, higher productivity

Up to 90% mounting time reduction with our PI-Spring, screw clamp and pluggable technologies.

##### Simplified selection and design

Intuitive codification, simplified catalogs, large technical data base.

##### Better project identification

20% larger marking area.  
Pre-mark by hand or label before final marker installation.



#### Easy to install

##### Secured installation

Asymmetrical design avoid mounting and wiring errors.

Zero-retightening with our technologies.

##### Faster accessories mounting

Benefit from screwless ground connection, jumpers, end stops.

##### Smart design facilitating assembly process

Mounting, wiring, testing... made easy.



#### Optimized logistics

##### 50% less accessories needed

End sections, circuit separators fit several blocks.

##### Common accessories

PI-Spring, screw and pluggable ranges share the same accessories.

##### Simplified inventory management

Significant reduction of part numbers to manage.



# SNK series, terminal blocks

Pluggable technology

## Terminal blocks

## End sections Jumper bars

	Cross section mm <sup>2</sup> / AWG	Spacing mm / in	Current IEC / UL	Function	Colour	Type	Part number	Part number	No. poles	Part number
<div style="display: flex; justify-content: space-between;"> <div> <b>Pluggable Pluggable</b> </div> <div> </div> </div>										
<b>2 connections</b> 	2.5 / - 2.5 / 14 4 / 12	5.2 / 0.205	22 A 20 A		Grey	ZD2.5-11	1SNK805016R0000	EDK2.5-11 1SNK805915R0000	2 3 5 10	1SNK905302R0000 1SNK905303R0000 1SNK905305R0000 1SNK905310R0000
<b>4 connections</b> 	2.5 / - 2.5 / 14 4 / 12	5.2 / 0.205	22 A 20 A 300 A 396 A	 	Grey Green/ Yellow	ZD2.5-22 ZD2.5-22-PE	1SNK805017R0000 1SNK805156R0000	ED2.5-22 1SNK805917R0000	2 3 5 10	1SNK905302R0000 1SNK905303R0000 1SNK905305R0000 1SNK905310R0000
<div style="display: flex; justify-content: space-between;"> <div> <b>PI-Spring Pluggable</b> </div> <div> </div> </div>										
<b>2 connections</b> 	2.5 / - 2.5 / 14 4 / 12	5.2 / 0.205	24 A 20 A 300 A 396 A	 	Grey Blue Green/ Yellow	ZDK2.5-11 ZDK2.5-11-BL ZDK2.5-11-PE	1SNK805015R0000 1SNK805025R0000 1SNK805150R0000	EDK2.5-11 1SNK805915R0000	2 3 5 10	1SNK905302R0000 1SNK905303R0000 1SNK905305R0000 1SNK905310R0000
<b>3 connections</b> 	2.5 / - 2.5 / 14 4 / 12	5.2 / 0.205	24 A 20 A		Grey	ZDK2.5-21	1SNK805014R0000	EDK2.5-21 1SNK805914R0000	2 3 5 10	1SNK905302R0000 1SNK905303R0000 1SNK905305R0000 1SNK905310R0000
<b>4 connections</b> 	2.5 / - 2.5 / 14 4 / 12	5.2 / 0.205	24 A 22 A 300 A 396 A	 	Grey Blue Green/ Yellow	ZDK2.5-22 ZDK2.5-22-BL ZDK2.5-22-PE	1SNK805010R0000 1SNK805020R0000 1SNK805152R0000	EDK2.5-22 1SNK805910R0000	2 3 5 10	1SNK906302R0000 1SNK906303R0000 1SNK906305R0000 1SNK906310R0000
<b>4 connections</b> 	4 / - 4 / 2 6 / 10	6 / 0.236	30 A 30 A		Grey	ZDK4-22	1SNK806010R0000	EDK2.5-22 1SNK805910R0000	2 3 5 10	1SNK906302R0000 1SNK906303R0000 1SNK906305R0000 1SNK906310R0000
<b>4 connections</b> 	2.5 / - 2.5 / 14 4 / 12	5.2 / 0.205	22 A 20 A 300 A 396 A	  	Grey Blue Grey Green, Green/ Yellow Green/ Yellow	ZDK2.5-D2 ZDK2.5-D2-BL ZDK2.5-D1 ZDK2.5-D2-PE ZDK2.5-D1-PE	1SNK805213R0000 1SNK805223R0000 1SNK805214R0000 1SNK805212R0000 1SNK805250R0000	EDK2.5-D 1SNK805913R0000	2 3 5 10	1SNK905302R0000 1SNK905303R0000 1SNK905305R0000 1SNK905310R0000
<b>Female Plug</b> 	2.5 / - 2.5 / 14 4 / 12	5.2 / 0.205	24 A 22 A		Grey Blue Green/ Yellow	CDK2.5 CDK2.5-BL CDK2.5-PE	1SNK805712R0000 1SNK805742R0000 1SNK805750R0000			
<b>Female Plug</b> 	2.5 / - 2.5 / 14 4 / 12	5.2 / 0.205	24 A 22 A		Grey Blue Green/ Yellow	CDK2.5-E CDK2.5-BL-E CDK2.5-PE-E	1SNK805713R0000 1SNK805743R0000 1SNK805753R0000			

## Terminal blocks

Terminal blocks								End sections	Jumper bars	
	Cross section mm <sup>2</sup> / AWG	Spacing mm / in	Current IEC / UL	Function	Colour	Type	Part number	Part number	No. poles	Part number
<b>Female Plug</b> 	2.5 / - 2.5 / 14 4 / 12	5.2 / 0.205	24 A 20 A		Grey <input type="checkbox"/>	CDK2.5-J	1SNK805738R0000		2	1SNK905302R0000
					Blue <input type="checkbox"/>	CDK2.5-J-BL	1SNK805744R0000			
<b>Female Plug</b> 	2.5 / - 2.5 / 14 4 / 12	5.2 / 0.205	24 A 20 A		Green/ Yellow <input type="checkbox"/>	CDK2.5-J-PE	1SNK805748R0000		3	1SNK905303R0000
					Grey <input type="checkbox"/>	CDK2.5-J-E	1SNK805739R0000			
<b>Female Plug</b> 	2.5 / - 2.5 / 14 4 / 12	5.2 / 0.205	24 A 20 A		Blue <input type="checkbox"/>	CDK2.5-J-BL-E	1SNK805745R0000		5	1SNK905305R0000
					Green/ Yellow <input type="checkbox"/>	CDK2.5-J-PE-E	1SNK805749R0000			
<b>Female Plug</b> 	2.5 / - 2.5 / 14 4 / 12	5.2 / 0.205	24 A 20 A		Grey <input type="checkbox"/>	CDK2.5-2P-J	1SNK805740R0000		3	1SNK905302R0000
					Blue <input type="checkbox"/>	CDK2.5-2P-J-BL	1SNK805746R0000			
<b>Female Plug</b> 	2.5 / - 2.5 / 14 4 / 12	5.2 / 0.205	24 A 20 A		Green/ Yellow <input type="checkbox"/>	CDK2.5-2P-J-PE	1SNK805751R0000		10	1SNK905310R0000
					Grey <input type="checkbox"/>	CDK2.5-2P-J-E	1SNK805741R0000			
<b>Female Plug</b> 	2.5 / - 2.5 / 14 4 / 12	5.2 / 0.205	24 A 20 A		Blue <input type="checkbox"/>	CDK2.5-2P-J-BL-E	1SNK805747R0000		10	1SNK905310R0000
					Green/ Yellow <input type="checkbox"/>	CDK2.5-2P-J-PE-E	1SNK805752R0000			
<b>Female Plug</b> 	4 / - 4 / 12 6 / 10	6 / 0.236	30 A 30 A		Grey <input type="checkbox"/>	CDK4 CDK4-E	1SNK806712R0000 1SNK806713R0000			



## Screw clamp Pluggable


<b>4 connections</b> 	4 / - 2.5 / 12 4 / 10	5.2 / 0.205	29 A 28 A		Grey <input type="checkbox"/>	ZDS4-22	1SNK805013R0000	EDS4-22 1SNK805911R0000	2 3 5 10	1SNK905302R0000 1SNK905303R0000 1SNK905305R0000 1SNK905310R0000
<b>4 connections</b> 	4 / - 4 / 10 4 / 10	6 / 0.236	29 A 28 A		Grey <input type="checkbox"/>	ZDS4-22-R1	1SNK806013R0000		2 3 5 10	1SNK906302R0000 1SNK906303R0000 1SNK906305R0000 1SNK906310R0000
<b>Female Plug</b> 	4 / - 2.5 / 12 4 / 10	5.2 / 0.205	29 A 28 A		Grey <input type="checkbox"/>	CDS4	1SNK805714R0000			
<b>Female Plug</b> 	4 / - 4 / 10 4 / 10	6 / 0.236	29 A 28 A		Grey <input type="checkbox"/>	CDS4-R1	1SNK806714R0000			
<b>Female Plug</b> 	4 / - 4 / 10 4 / 10	5.2 / 0.205	29 A 28 A		Grey <input type="checkbox"/>	CDS4-E	1SNK805715R0000			

## End stops

<b>Pre-printed marking cards</b> 	5.2 / 0.205	Screwless, for single deck	BAZ1	1SNK900002R0000
	10 / 0.394	Screw for single deck	BAM4	1SNK900001R0000
	10 / 0.394	Screw for double deck/power blocks	BAZH1	1SNK900102R0000
	4.8 / 0.189	Horizontal	1->10 (x10)	1SNK140011R0000
		Vertical	1->100	1SNK145011R0000
	5.6 / 0.220	Horizontal	1->10 (x10)	1SNK140012R0000
			1->100	1SNK145012R0000
		Vertical	1->10 (x10)	1SNK150011R0000
			1->100	1SNK155011R0000

- Flexible without ferrule
- Flexible with insulated ferrule
- Rigid Solid



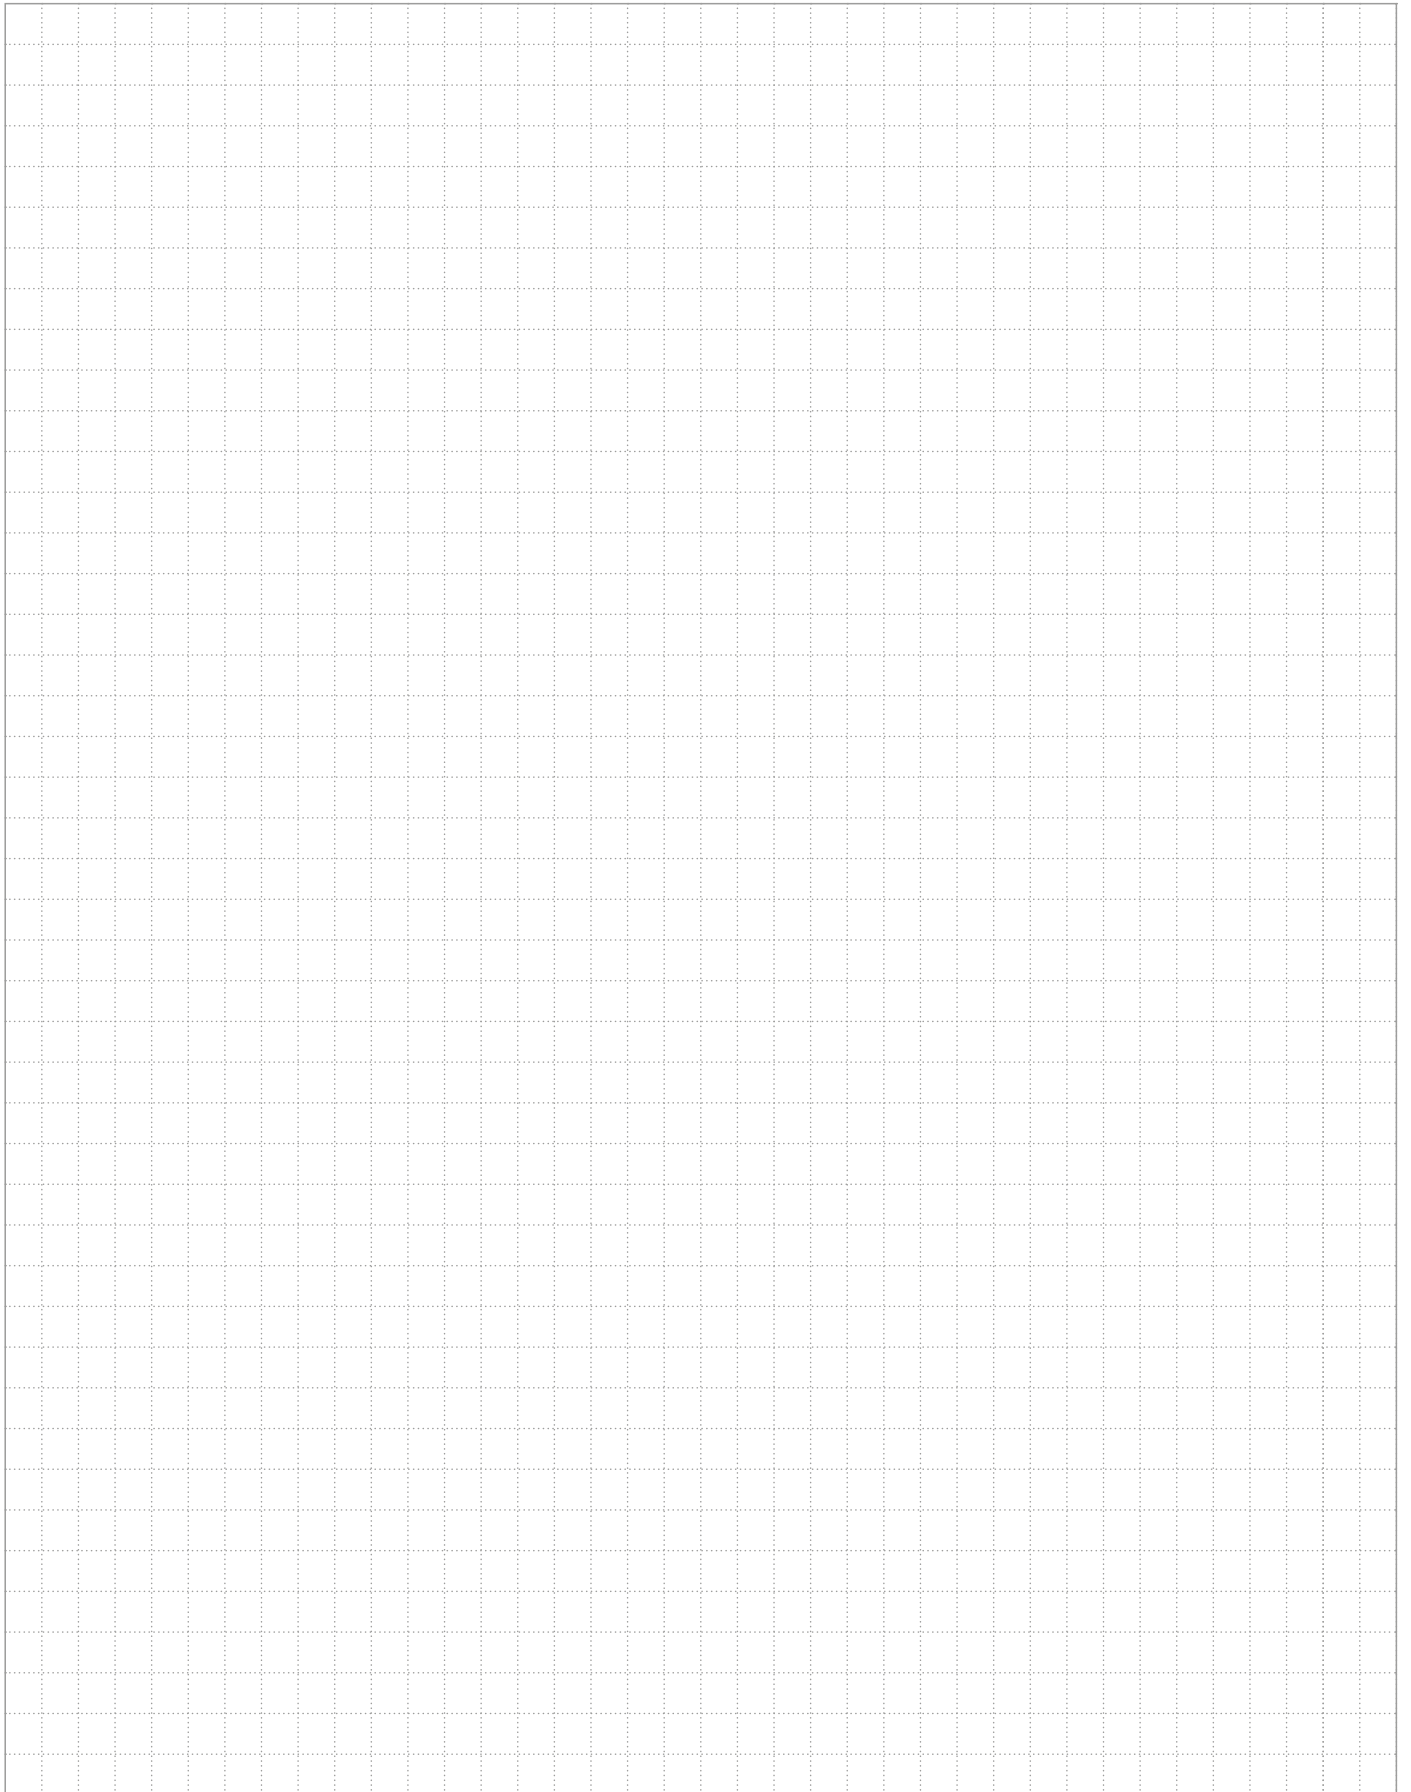


# DBL power distribution blocks

## Range overview


Single pole, solar, three poles, flat conductor and 2 in/2 out

### Single pole


**DBL80**  
7 connections




**DBL125**  
8 connections





**DBL160**  
8 connections



**DBL175**  
12 connections



**DBL250 and DBL400**  
12 connections

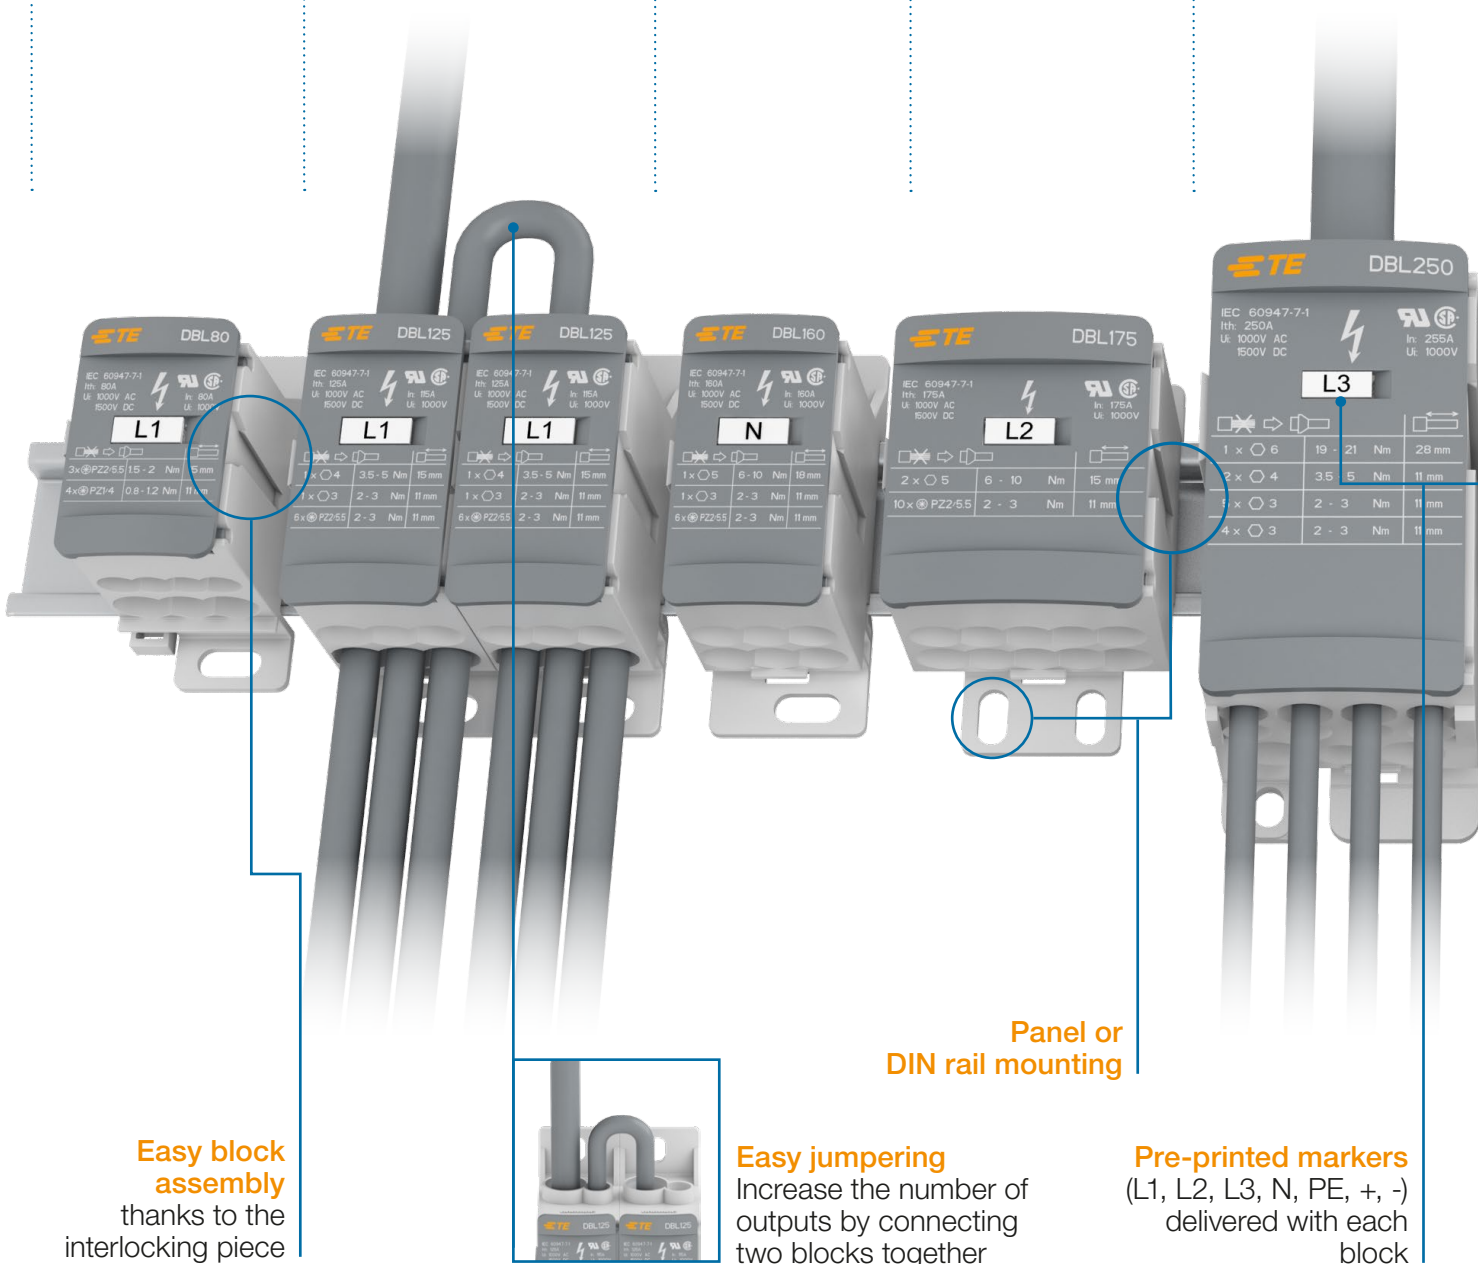

**Easy block assembly**  
thanks to the interlocking piece




**Easy jumpering**  
Increase the number of outputs by connecting two blocks together

**Panel or DIN rail mounting**

**Pre-printed markers**  
(L1, L2, L3, N, PE, +, -) delivered with each block


## Solar

**DBL400-PV**  
14 connections




## Three poles

**DBL125-3 and  
DBL175-C-3**  
8x3 connections





## Flat conductor

**DBL250-F and  
DBL500-F**  
7 and 12 connections



## 2 in/2 out

**DBL500-22**  
4 connections

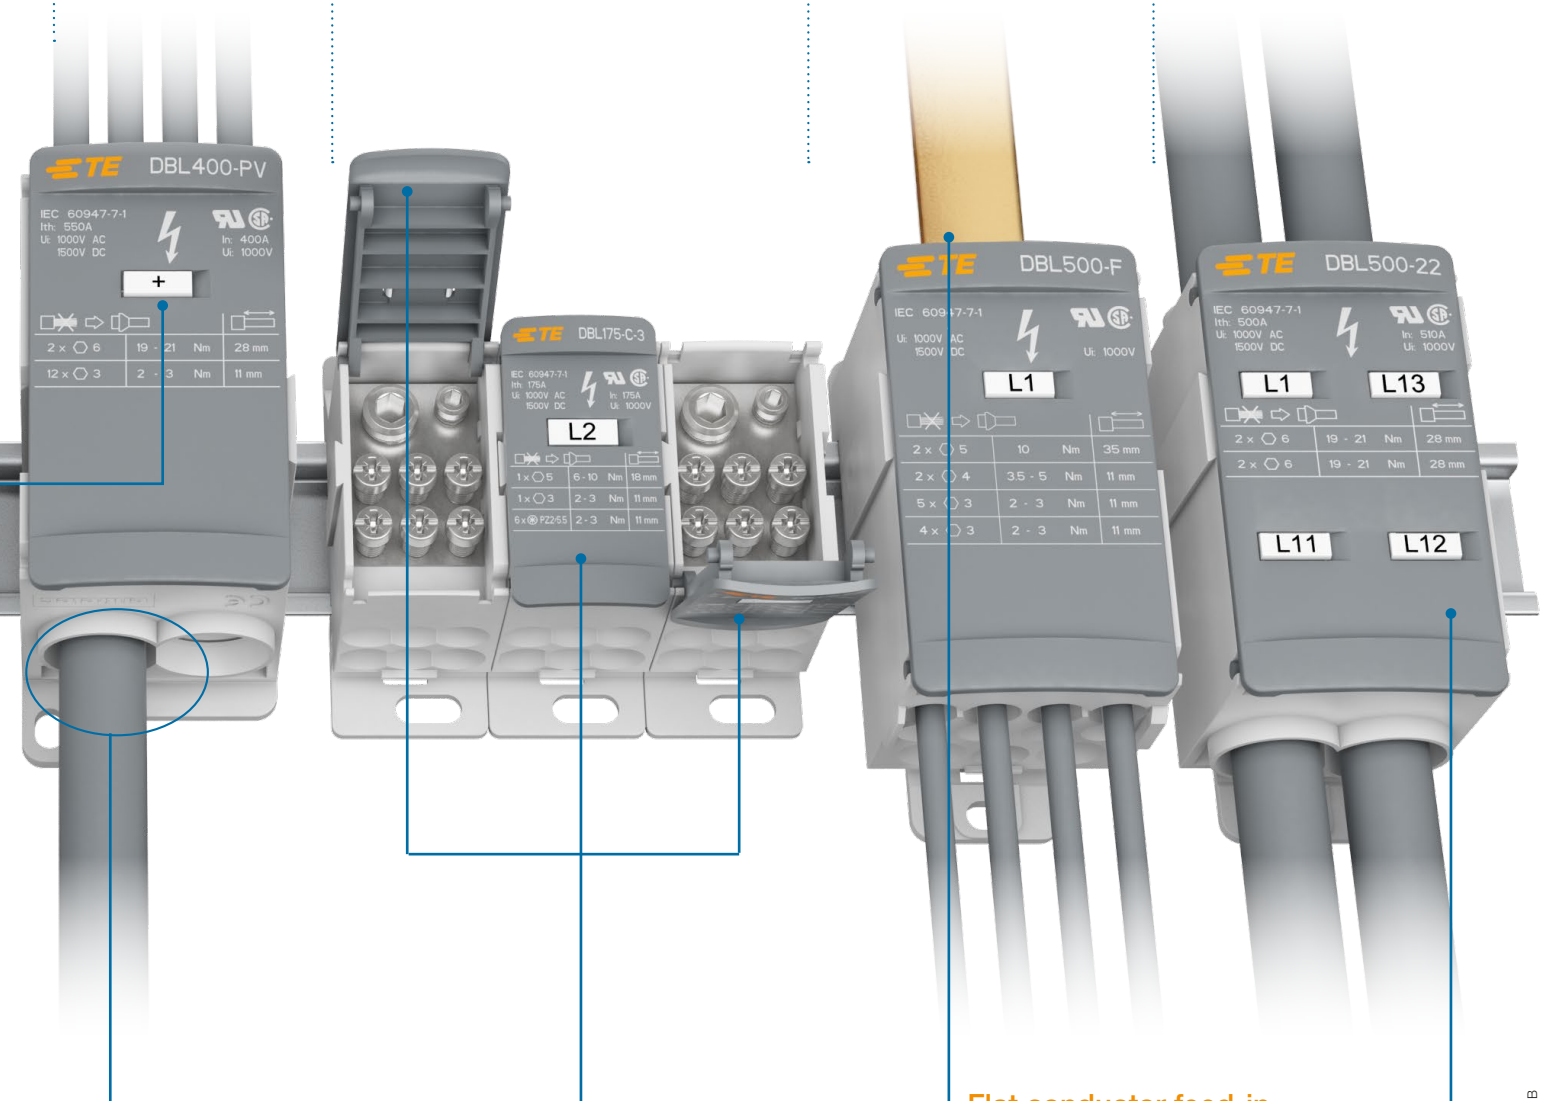


**Combining  
of 12 photovoltaic strings**  
to collect solar energy up to  
1500 V DC (IEC), 1000 V DC (UL)

**Flexible cover for  
easy wiring:**

- Two directions opening
- Removable & snap-on

**Flat conductor feed-in**

**Main technical data  
printed on the cover and  
visible from top**

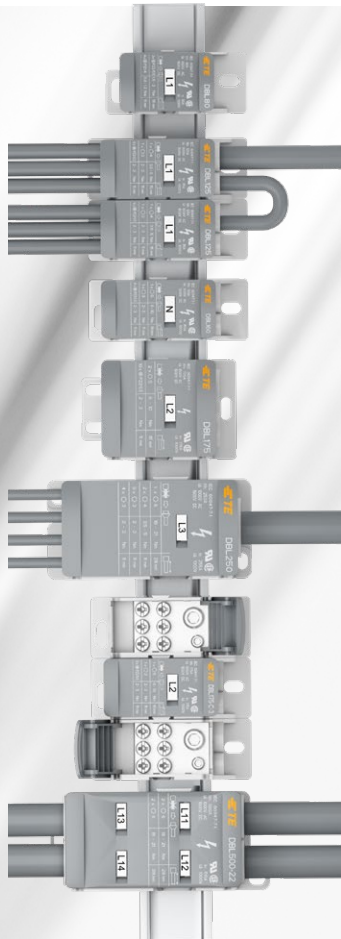

# DBL POWER DISTRIBUTION BLOCKS

## Screw clamp technology

1000 V AC / 1500 V DC (IEC) - 1000 V (UL), from 80 to 550 A

### ENTRELEC Terminal Blocks

The exclusive compact and modular design of our power distribution blocks allows easy installation combined with a great flexibility of use.



### Easy to install

#### 3 configurations in 1 product:


**Single pole splitter:** split of power main input into several outputs.

**Multiple poles splitter:** interlocking function and ready to use marking kit (L1, L2, L3, N, PE, +, -) delivered with each block.

**Grouping** of several inputs into 1 output (solar application).

#### Flexible cover facilitates identification & wiring:

- Reversible, two directions opening, snap-on
- All wiring data's and specifications visible on top.



### Space saving

#### Panel space saving:

Save up to 50 % rail space compare to conventional distribution bars thanks to our modular compact design.

#### 1 500 V DC:

Voltage rating adapted to most recent solar inverters requirements.



### Increased productivity

#### Reduced wiring, inventories, hardware and assembly costs:

- Reduce assembly time by 80 % compared to conventional systems.
- Our modular and touch proof concept eliminates the needs for bus bars, isolators, fasteners, protection screens...
- Accept **aluminum & copper** conductors.
- **1** product in stock for **3 possible** configurations.



# DBL Power distribution blocks

## Screw clamp technology

### Single pole

**DBL80**  
7 connections



**DBL125**  
8 connections



**DBL160**  
8 connections



**DBL175**  
12 connections



**DBL250 et DBL400**  
12 connections



### Solar

**DBL400-PV**  
14 connections




### Three poles

**DBL125-3 et DBL175-C-3**  
8x3 connections




### Flat conductor

**DBL250-F et DBL500-F**  
7 et 12 connections



**2 inputs / 2 outputs DBL500-22**  
4 connections

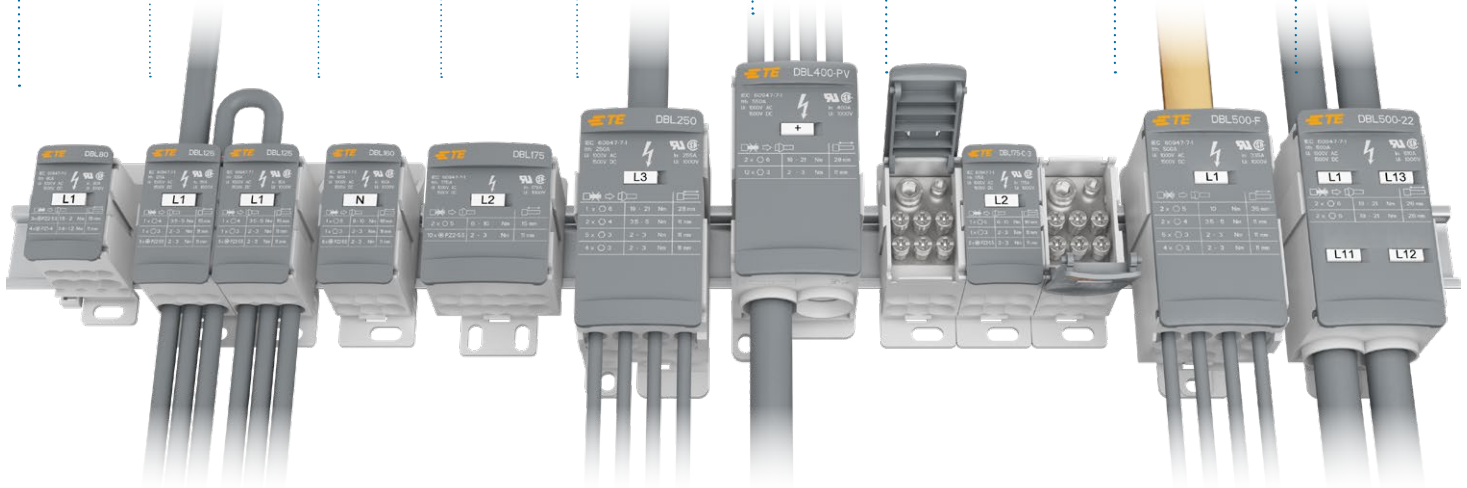

IEC	UL / CSA	Connection capacity			Max cross section						Type	Part number	Pkg	
		Cable diameter Ø			Flexible with insulated ferrule		Rigid Solid		Rigid Stranded					
		nb	mm	in	mm²	AWG	mm²	AWG	mm²	AWG				
	Cu: 80 A Al: 63 A	Cu: 80 A	3	6.6	0.26	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 4	2.5 ... 16	14 ... 4	DBL80	1SNL308010R0000	1
			4	4.5	0.177	2.5 ... 6	14 ... 10	2.5 ... 6	14 ... 10	2.5 ... 6	14 ... 10			
			1	9.8	0.386	10 ... 35	8 ... 2	10 ... 35	8 ... 2	10 ... 35	8 ... 2			
	Cu: 125 A Al: 100 A	Cu: 115 A	1	9.8	0.386	10 ... 35	8 ... 2	10 ... 35	8 ... 2	10 ... 35	8 ... 2	DBL125	1SNL312510R0000	1
			1	6.8	0.268	2.5 ... 16	14 ... 6	6 ... 16	10 ... 6	6 ... 16	10 ... 6			
			6	6.4	0.256	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 6			
	Cu: 125 A Al: 100 A	Cu: 115 A	3x1	9.8	0.386	10 ... 35	8 ... 2	10 ... 35	8 ... 2	10 ... 35	8 ... 2	DBL125-3	1SNL312530R0000	3
			3x1	6.8	0.268	2.5 ... 16	14 ... 6	6 ... 16	10 ... 6	6 ... 16	10 ... 6			
			3x6	6.4	0.256	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 6			
	Cu: 160 A Al: 135 A	Cu: 160 A	1	11.8	0.465	16 ... 50	6 ... 1/0	16 ... 70	6 ... 2/0	16 ... 70	6 ... 2/0	DBL160	1SNL316010R0000	1
			1	6.8	0.268	2.5 ... 16	14 ... 6	6 ... 16	10 ... 6	6 ... 16	10 ... 6			
			6	6.4	0.256	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 6			
	Cu: 175 A Al: 135 A	Cu: 175 A	2	11.8	0.465	10 ... 50	8 ... 1/0	10 ... 70	6 ... 2/0	10 ... 70	6 ... 2/0	DBL175	1SNL317510R0000	1
			10	6.4	0.252	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 6			
			3x1	11.8	0.465	16 ... 50	8 ... 1/0	16 ... 70	6 ... 2/0	16 ... 70	6 ... 2/0			
	Cu: 175 A Al: 135 A	Cu: 175 A	3x1	6.8	0.268	2.5 ... 16	14 ... 6	6 ... 16	10 ... 6	6 ... 16	10 ... 6	DBL175-C-3	1SNL317531R0000	3
			3x6	6.4	0.256	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 6			
			1	15.3	0.602	35 ... 95	2 ... 3/0	35 ... 120	2 ... 250 kcmil	35 ... 120	2 ... 250 kcmil			
	Cu: 250 A Al: 200 A	Cu: 255 A	2	8.7	0.343	2.5 ... 25	14 ... 4	2.5 ... 35	14 ... 2	2.5 ... 35	14 ... 2	DBL250	1SNL325010R0000	1
			5	6.4	0.256	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 6			
			4	5.7	0.224	2.5 ... 10	14 ... 8	2.5 ... 10	14 ... 8	2.5 ... 10	14 ... 8			
	Flexible bars : 250 A Solid bars : 160 A	Flexible bars : 250 A Solid bars : 160 A	1	15.5 x 7.5	0.59 x 0.28	Flexible bars : 3 x 9 x 0.8 mm ... 6 x 15.5 x 0.8 mm Solid bars : 12 x 4 mm						DBL250-F	1SNL325060R0000	1
			6	6.6	0.26	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 6			
			1	18.8	0.74	95 ... 150	3/0 ... 300 kcmil	95 ... 185	3/0 ... 400 kcmil	95 ... 185	3/0 ... 400 kcmil			
	Cu: 400 A Al: 300 A	Cu: 335 A	2	8.7	0.343	2.5 ... 25	14 ... 4	2.5 ... 35	14 ... 2	2.5 ... 35	14 ... 2	DBL400	1SNL340010R0000	1
			5	6.4	0.256	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 6			
			4	5.7	0.224	2.5 ... 10	14 ... 8	2.5 ... 10	14 ... 8	2.5 ... 10	14 ... 8			
	Cu: 550 A	Cu: 400 A	2	15.5	0.59	2.5 ... 95	4 ... 3/0	25 ... 120	4 ... 250 kcmil	25 ... 120	4 ... 250 kcmil	DBL400-PV	1SNL340011R0000	1
			12	6.6	0.26	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 6			
			2	15.5	0.61	25 ... 95	4 ... 3/0	25 ... 120	4 ... 250 kcmil	25 ... 120	4 ... 250 kcmil			
	Cu: 500 A	Cu: 510 A	2	15.5	0.61	25 ... 95	4 ... 3/0	25 ... 120	4 ... 250 kcmil	25 ... 120	4 ... 250 kcmil	DBL500-22	1SNL850001R0000	1
			2	15.5	0.61	25 ... 95	4 ... 3/0	25 ... 120	4 ... 250 kcmil	25 ... 120	4 ... 250 kcmil			


Rated voltage 1000 V AC, 1500 V DC (IEC) / 1000 V AC/DC (UL/CSA).

Flexible without ferrule (IEC V-K & UL: class 5/6)	Flexible with insulated ferrule (IEC V-K & UL: class 5/6)	Rigid Solid (IEC V-U class 1, UL solid)	Rigid Stranded (IEC V-R class 2, UL class B/C)
--	---	---	--

# Index

## Additional technical data

Terminal block dimensions  
(add rail height to obtain mounted dimensions)  
e.g. TH 35-7.5 rail = product height +7.5 mm

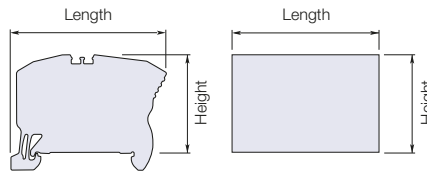

Other products (not mounted on rail)

Part Number	Type	Description	Rated voltage (IEC) V	Rated voltage (UL/CSA) V	Length mm	Height mm	Units per box	Units per carton
1SNK140011R0000	MC512PA	Terminal Block Markers	-	-	12	5	1	600
1SNK140012R0000	MC512PA	Terminal Block Markers	-	-	12	5	1	600
1SNK145011R0000	MC512PA	Terminal Block Markers	-	-	12	5	1	600
1SNK145012R0000	MC512PA	Terminal Block Markers	-	-	12	5	1	600
1SNK150011R0000	MC612PA	Terminal Block Markers	-	-	12	5.6	1	600
1SNK150012R0000	MC612PA	Terminal Block Markers	-	-	12	5.6	1	600
1SNK155011R0000	MC612PA	Terminal Block Markers	-	-	12	5.6	1	600
1SNK155012R0000	MC612PA	Terminal Block Markers	-	-	12	5.6	1	600
1SNK505010R0000	ZS4	Screw Clamp Terminal Blocks	1000	600	53	47.3	50	900
1SNK505020R0000	ZS4-BL	Screw Clamp Terminal Blocks	1000	600	53	47.3	50	900
1SNK505150R0000	ZS4-PE	Screw Clamp Terminal Blocks	-	-	59.5	47.4	20	420
1SNK505210R0000	ZS4-D2	Screw Clamp Terminal Blocks	800	300	70.4	65.5	50	500
1SNK505212R0000	ZS4-T3	Screw Clamp Terminal Blocks	800	300	100.1	78.4	25	350
1SNK505220R0000	ZS4-D2-BL	Screw Clamp Terminal Blocks	800	300	70.4	65.5	50	500
1SNK505310R0000	ZS4-S	Screw Clamp Terminal Blocks	400	150	53	51.35	50	900
1SNK505311R0000	ZS4-S-T2	Screw Clamp Terminal Blocks	400	150	53	51.35	50	900
1SNK505910R0000	ES4	End Sections	-	-	50.9	-	20	4000
1SNK505910R0000	ES4	End Sections	-	-	50.9	-	20	4000
1SNK505960R0000	ES4-D2	End Sections	-	-	70.2	-	20	1500
1SNK505961R0000	ES4-T3	End Sections	-	-	97	-	20	3000
1SNK506010R0000	ZS6	Screw Clamp Terminal Blocks	1000	600	53	47.3	50	750
1SNK506020R0000	ZS6-BL	Screw Clamp Terminal Blocks	1000	600	53	47.3	50	750
1SNK506150R0000	ZS6-PE	Screw Clamp Terminal Blocks	-	-	59.5	47.4	20	360
1SNK506210R0000	ZS6-D2	Screw Clamp Terminal Blocks	800	300	70.4	65.5	50	400
1SNK506213R0000	ZS4-T3-R1	Screw Clamp Terminal Blocks	800	300	100.1	78.4	25	350
1SNK506220R0000	ZS6-D2-BL	Screw Clamp Terminal Blocks	800	300	70.4	65.5	50	400
1SNK506315R0000	ZS6-S	Screw Clamp Terminal Blocks	500	300	53	51.35	50	750
1SNK508010R0000	ZS10	Screw Clamp Terminal Blocks	1000	600	53	47.3	50	600
1SNK508020R0000	ZS10-BL	Screw Clamp Terminal Blocks	1000	600	53	47.3	50	600
1SNK508150R0000	ZS10-PE	Screw Clamp Terminal Blocks	-	-	59.5	47.3	20	240
1SNK508315R0000	ZS10-S	Screw Clamp Terminal Blocks	630	300	53	51.35	50	600
1SNK508410R0000	ZS4-SF1	Screw Clamp Terminal Blocks	630	300	59.7	45.6	50	450
1SNK508411R0000	ZS4-SF1-T2	Screw Clamp Terminal Blocks	630	300	59.7	45.6	50	450

## Index

### Additional technical data

Part Number	Type	Description	Rated voltage (IEC) V	Rated voltage (UL/CSA) V	Length mm	Height mm	Units per box	Units per carton
1SNK508960R0000	ES4-SF	End Sections	-	-	59	-	20	2000
1SNK510010R0000	ZS16	Screw Clamp Terminal Blocks	1000	600	56.1	48.8	25	450
1SNK510020R0000	ZS16-BL	Screw Clamp Terminal Blocks	1000	600	56.1	48.8	25	450
1SNK510150R0000	ZS16-PE	Screw Clamp Terminal Blocks	-	-	60.6	48.8	20	160
1SNK512010R0000	ZS25	Screw Clamp Terminal Blocks	1000	600	56.1	48.8	25	200
1SNK512020R0000	ZS25-BL	Screw Clamp Terminal Blocks	1000	600	56.1	48.8	25	200
1SNK512150R0000	ZS25-PE	Screw Clamp Terminal Blocks	-	-	63.6	48.9	20	300
1SNK516010R0000	ZS35	Screw Clamp Terminal Blocks	1000	600	59	54.3	20	80
1SNK516011R0000	ZS50	Screw Clamp Terminal Blocks	1000	1000	63.6	-	20	160
1SNK516020R0000	ZS35-BL	Screw Clamp Terminal Blocks	1000	600	59	54.3	20	80
1SNK516021R0000	ZS50-BL	Screw Clamp Terminal Blocks	1000	1000	63.6	-	20	160
1SNK516150R0000	ZS35-PE	Screw Clamp Terminal Blocks	-	-	59	58	20	80
1SNK516151R0000	ZS50-PE	Screw Clamp Terminal Blocks	-	-	63.6	-	20	80
1SNK522010R0000	ZS70	Screw Clamp Terminal Blocks	1000		74	75.35	10	30
1SNK522020R0000	ZS70-BL	Screw Clamp Terminal Blocks	1000		74	75.35	10	30
1SNK522150R0000	ZS70-PE	Screw Clamp Terminal Blocks	-	-	74	68.8	10	30
1SNK526010R0000	ZS95	Screw Clamp Terminal Blocks	1000	600	87	80.1	10	30
1SNK526020R0000	ZS95-BL	Screw Clamp Terminal Blocks	1000	600	87	80.1	10	30
1SNK526150R0000	ZS95-PE	Screw Clamp Terminal Blocks	-	-	87	85.2	10	30
1SNK705010R0000	ZK2.5	PI-Spring Terminal Blocks	1000	600	50.9	40.2	50	1200
1SNK705011R0000	ZK2.5-3P	PI-Spring Terminal Blocks	1000	600	64.7	40.2	50	750
1SNK705012R0000	ZK2.5-4P	PI-Spring Terminal Blocks	1000	600	80.2	40.2	50	800
1SNK705020R0000	ZK2.5-BL	PI-Spring Terminal Blocks	1000	600	50.9	40.2	50	1200
1SNK705021R0000	ZK2.5-3P-BL	PI-Spring Terminal Blocks	1000	600	64.7	40.2	50	750
1SNK705022R0000	ZK2.5-4P-BL	PI-Spring Terminal Blocks	1000	600	80.2	40.2	50	800
1SNK705150R0000	ZK2.5-PE	PI-Spring Terminal Blocks	-	-	57.4	40.3	20	720
1SNK705151R0000	ZK2.5-PE-3P	PI-Spring Terminal Blocks	-	-	71.2	40.3	20	640
1SNK705152R0000	ZK2.5-PE-4P	PI-Spring Terminal Blocks	-	-	86.7	40.3	20	640
1SNK705210R0000	ZK2.5-D2	PI-Spring Terminal Blocks	800	600	78.5	60.2	50	400
1SNK705211R0000	ZK2.5-D1	PI-Spring Terminal Blocks	800	600	78.5	60.2	50	400
1SNK705220R0000	ZK2.5-D2-BL	PI-Spring Terminal Blocks	800	600	78.5	60.2	50	400
1SNK705310R0000	ZK2.5-S	PI-Spring Terminal Blocks	630	300	65.3	44.2	50	750
1SNK705510R0000	ZK2.5-T3	PI-Spring Terminal Blocks	500	300	99.6	73.84	25	350
1SNK705511R0000	ZK2.5-T1	PI-Spring Terminal Blocks	500	300	99.6	73.84	25	350
1SNK705512R0000	ZK2.5-L-L-PE	PI-Spring Terminal Blocks	500	300	101.9	73.34	25	350
1SNK705513R0000	ZK2.5-L-N-PE	PI-Spring Terminal Blocks	500	300	101.9	73.34	25	350
1SNK705550R0000	ZK2.5-T1-PE	PI-Spring Terminal Blocks	-	-	101.9	73.34	25	350

# Index

## Additional technical data

Part Number	Type	Description	Rated voltage	Rated voltage	Length	Height	Units per box	Units per carton	
			(IEC)	(UL/CSA)					
			V	V	mm	mm			
1SNK705910R0000	EK2.5	End Sections	-	-	52.24	-	20	2900	
1SNK705911R0000	EK2.5-3P	End Sections	-	-	65.73	-	20	1800	
1SNK705911R0000	EK2.5-3P	End Sections	-	-	65.73	-	20	1800	
1SNK705912R0000	EK2.5-4P	End Sections	-	-	82.77	-	20	1800	
1SNK705960R0000	EK2.5-D2	End Sections	-	-	76.25	-	20	2500	
1SNK705961R0000	EK2.5-T3	End Sections	-	-	98.4	75.55	20	2500	
1SNK706010R0000	ZK4	PI-Spring Terminal Blocks	1000	600	55.3	41.1	50	600	
1SNK706011R0000	ZK4-3P	PI-Spring Terminal Blocks	1000	600	72.5	41.1	50	600	
1SNK706012R0000	ZK4-4P	PI-Spring Terminal Blocks	1000	600	89.7	41.1	50	600	
1SNK706020R0000	ZK4-BL	PI-Spring Terminal Blocks	1000	600	55.3	41.1	50	600	
1SNK706021R0000	ZK4-3P-BL	PI-Spring Terminal Blocks	1000	600	72.5	41.1	50	600	
1SNK706022R0000	ZK4-4P-BL	PI-Spring Terminal Blocks	1000	600	89.7	41.1	50	600	
1SNK706150R0000	ZK4-PE	PI-Spring Terminal Blocks	-	-	62.7	41.2	20	480	
1SNK706151R0000	ZK4-PE-3P	PI-Spring Terminal Blocks	-	-	79	41.2	20	480	
1SNK706152R0000	ZK4-PE-4P	PI-Spring Terminal Blocks	-	-	96.2	41.2	20	360	
1SNK706410R0000	ZK2.5-SF	PI-Spring Terminal Blocks	500	300	63.1	72.5	50	400	
1SNK706411R0000	ZK2.5-SF-R1	PI-Spring Terminal Blocks	500	300	63.1	72.5	50	400	
1SNK708010R0000	ZK6	PI-Spring Terminal Blocks	1000	600	57.5	41.9	50	450	
1SNK708011R0000	ZK6-3P	PI-Spring Terminal Blocks	1000	600	79.1	41.9	50	300	
1SNK708020R0000	ZK6-BL	PI-Spring Terminal Blocks	1000	600	57.5	41.9	50	450	
1SNK708021R0000	ZK6-3P-BL	PI-Spring Terminal Blocks	1000	600	79.1	41.9	50	300	
1SNK708150R0000	ZK6-PE	PI-Spring Terminal Blocks	-	-	64.6	42	20	480	
1SNK708151R0000	ZK6-PE-3P	PI-Spring Terminal Blocks	-	-	85.6	42	20	240	
1SNK708911R0000	EK6-3P	End Sections	-	-	78.28	-	20	1800	
1SNK710010R0000	ZK10	PI-Spring Terminal Blocks	1000	600	82.5	47.5	20	240	
1SNK710020R0000	ZK10-BL	PI-Spring Terminal Blocks	1000	600	82.5	47.5	20	240	
1SNK710150R0000	ZK10-PE	PI-Spring Terminal Blocks	-	-	87.7	47.6	20	240	
1SNK710910R0000	EK10	End Sections	-	-	80.47	-	20	1800	
1SNK712010R0000	ZK16	PI-Spring Terminal Blocks	1000	600	82.5	47.5	20	240	
1SNK712020R0000	ZK16-BL	PI-Spring Terminal Blocks	1000	600	82.5	47.5	20	240	
1SNK712150R0000	ZK16-PE	PI-Spring Terminal Blocks	-	-	89	47.6	20	240	
1SNK805010R0000	ZDK2.5-22	PI-Spring Pluggable Terminal Blocks	1000	600	89.3	89.3	50	500	
1SNK805013R0000	ZDS4-22	Screw clamp Pluggable Terminal Blocks	800	300	80.3	80.3	50	400	
1SNK805014R0000	ZDK2.5-21	PI-Spring Pluggable Terminal Blocks	1000	600	65.1	65.1	50	1100	
1SNK805015R0000	ZDK2.5-11	PI-Spring Pluggable Terminal Blocks	1000	600	49.6	49.6	50	1450	
1SNK805016R0000	ZD2.5-11	PI-Spring Pluggable Terminal Blocks	1000	600	54.4	54.4	50	1700	
1SNK805017R0000	ZD2.5-22	PI-Spring Pluggable Terminal Blocks	1000	600	101.9	101.9	50	900	



## Index

### Additional technical data

Part Number	Type	Description	Rated voltage (IEC) V	Rated voltage (UL/CSA) V	Length mm	Height mm	Units per box	Units per carton
1SNK805020R0000	ZDK2.5-22-BL	PI-Spring Pluggable Terminal Blocks	1000	600	89.3	89.3	50	500
1SNK805025R0000	ZDK2.5-11-BL	PI-Spring Pluggable Terminal Blocks	1000	600	49.6	49.6	50	1400
1SNK805150R0000	ZDK2.5-11-PE	PI-Spring Pluggable Terminal Blocks	-	-	56.1	56.1	50	950
1SNK805152R0000	ZDK2.5-22-PE	PI-Spring Pluggable Terminal Blocks	-	-	94.7	94.7	50	500
1SNK805156R0000	ZD2.5-22-PE	PI-Spring Pluggable Terminal Blocks	-	-	108.4	108.4	50	650
1SNK805212R0000	ZDK2.5-D2-PE	PI-Spring Pluggable Terminal Blocks	800	600	88.5	88.5	50	850
1SNK805213R0000	ZDK2.5-D2	PI-Spring Pluggable Terminal Blocks	800	600	81.5	81.5	50	900
1SNK805214R0000	ZDK2.5-D1	PI-Spring Pluggable Terminal Blocks	800	600	81.5	81.5	50	850
1SNK805223R0000	ZDK2.5-D2-BL	PI-Spring Pluggable Terminal Blocks	800	600	81.5	81.5	50	900
1SNK805250R0000	ZDK2.5-D1-PE	PI-Spring Pluggable Terminal Blocks	-	-	88.5	88.5	50	800
1SNK805712R0000	CDK2.5	PI-Spring Female Plugs	1000	600	19.1	18.5	50	1400
1SNK805713R0000	CDK2.5-E	PI-Spring Female Plugs	1000	600	19.1	18.5	50	1400
1SNK805714R0000	CDS4	Screw clamp Female Plugs	800	300	22.4	22.35	50	1400
1SNK805715R0000	CDS4-E	Screw clamp Female Plugs	800	300	22.4	22.35	50	1400
1SNK805738R0000	CDK2.5-J	PI-Spring Female Plugs	800	600	23.7	23.7	50	2200
1SNK805739R0000	CDK2.5-J-E	PI-Spring Female Plugs	800	600	23.7	23.7	50	2300
1SNK805740R0000	CDK2.5-2P-J	PI-Spring Female Plugs	500	600	35.5	35.5	50	1700
1SNK805741R0000	CDK2.5-2P-J-E	PI-Spring Female Plugs	500	600	35.5	35.5	50	1700
1SNK805742R0000	CDK2.5-BL	PI-Spring Female Plugs	1000	600	19.1	19.1	50	1400
1SNK805744R0000	CDK2.5-J-BL	PI-Spring Female Plugs	800	600	23.7	23.7	50	2200
1SNK805744R0000	CDK2.5-J-BL	PI-Spring Female Plugs	800	600	23.7	23.7	50	2200
1SNK805745R0000	CDK2.5-J-BL-E	PI-Spring Female Plugs	800	600	23.7	23.7	50	1000
1SNK805746R0000	CDK2.5-2P-J-BL	PI-Spring Female Plugs	500	600	35.5	35.5	50	1700
1SNK805747R0000	CDK2.5-2P-J-BL-E	PI-Spring Female Plugs	500	600	35.5	35.5	50	1000
1SNK805748R0000	CDK2.5-J-PE	PI-Spring Female Plugs	800	600	23.7	23.7	50	2200
1SNK805749R0000	CDK2.5-J-PE-E	PI-Spring Female Plugs	800	600	23.7	23.7	50	2300
1SNK805750R0000	CDK2.5-PE	PI-Spring Female Plugs	1000	600	19.1	19.1	50	1400
1SNK805751R0000	CDK2.5-2P-J-PE	PI-Spring Female Plugs	500	600	35.5	35.5	50	1700
1SNK805752R0000	CDK2.5-2P-J-PE-E	PI-Spring Female Plugs	500	600	35.5	35.5	50	1700
1SNK805753R0000	CDK2.5-PE-E	PI-Spring Female Plugs	1000	600	19.1	19.1	50	1400
1SNK805910R0000	EDK2.5-22	End Sections	-	-	88.8	-	20	2000
1SNK805911R0000	EDS4-22	End Sections	-	-	79.3	-	20	2000
1SNK805913R0000	EDK2.5-D	End Sections	-	-	80.3	80.3	20	2000
1SNK805914R0000	EDK2.5-21	End Sections	-	-	65.6	65.6	20	2000
1SNK805915R0000	EDK2.5-11	End Sections	-	-	49.05	49.05	20	3000
1SNK805915R0000	EDK2.5-11	End Sections	-	-	49.05	49.05	20	3000
1SNK805917R0000	ED2.5-22	End Sections	-	-	102.1	102.1	20	2000

# Index

## Additional technical data

Part Number	Type	Description	Rated voltage (IEC) V	Rated voltage (UL/CSA) V	Length mm	Height mm	Units per box	Units per carton
1SNK806010R0000	ZDK4-22	PI-Spring Pluggable Terminal Blocks	1000	600	93.8	93.8	50	600
1SNK806013R0000	ZDS4-22-R1	Screw clamp Pluggable Terminal Blocks	800	300	80.3	80.3	40	480
1SNK806712R0000	CDK4	PI-Spring Female Plugs	1000	600	20.6	20.35	50	1400
1SNK806713R0000	CDK4-E	PI-Spring Female Plugs	1000	600	20.6	20.35	50	1400
1SNK806714R0000	CDS4-R1	Screw clamp Female Plugs	800	300	22.4	22.35	50	1400
1SNK900001R0000	BAM4	End Stops	-	-	53.5	-	50	1000
1SNK900002R0000	BAZ1	End Stops	-	-	54.4	-	50	750
1SNK900102R0000	BAZH1	End Stops	-	-	74.4	-	20	360
1SNK905302R0000	JB5-2	Jumper Bars	1000	600	8.2	-	50	1500
1SNK905302R0000	JB5-2	Jumper Bars	1000	600	8.2	-	50	1500
1SNK905302R0000	JB5-2	Jumper Bars	1000	600	8.2	-	50	1500
1SNK905302R0000	JB5-2	Jumper Bars	1000	600	8.2	-	50	1500
1SNK905302R0000	JB5-2	Jumper Bars	1000	600	8.2	-	50	1500
1SNK905302R0000	JB5-2	Jumper Bars	1000	600	8.2	-	50	1500
1SNK905302R0000	JB5-2	Jumper Bars	1000	600	8.2	-	50	1500
1SNK905302R0000	JB5-2	Jumper Bars	1000	600	8.2	-	50	1500
1SNK905302R0000	JB5-2	Jumper Bars	1000	600	8.2	-	50	1500
1SNK905302R0000	JB5-2	Jumper Bars	1000	600	8.2	-	50	1500
1SNK905302R0000	JB5-2	Jumper Bars	1000	600	8.2	-	50	1500
1SNK905302R0000	JB5-2	Jumper Bars	1000	600	8.2	-	50	1500
1SNK905302R0000	JB5-2	Jumper Bars	1000	600	8.2	-	50	1500
1SNK905302R0000	JB5-2	Jumper Bars	1000	600	8.2	-	50	1500
1SNK905302R0000	JB5-2	Jumper Bars	1000	600	8.2	-	50	1500
1SNK905302R0000	JB5-2	Jumper Bars	1000	600	8.2	-	50	1500
1SNK905303R0000	JB5-3	Jumper Bars	1000	600	13.4	-	50	1500
1SNK905303R0000	JB5-3	Jumper Bars	1000	600	13.4	-	50	1500
1SNK905303R0000	JB5-3	Jumper Bars	1000	600	13.4	-	50	1500
1SNK905303R0000	JB5-3	Jumper Bars	1000	600	13.4	-	50	1500
1SNK905303R0000	JB5-3	Jumper Bars	1000	600	13.4	-	50	1500
1SNK905303R0000	JB5-3	Jumper Bars	1000	600	13.4	-	50	1500
1SNK905303R0000	JB5-3	Jumper Bars	1000	600	13.4	-	50	1500
1SNK905303R0000	JB5-3	Jumper Bars	1000	600	13.4	-	50	1500
1SNK905303R0000	JB5-3	Jumper Bars	1000	600	13.4	-	50	1500
1SNK905303R0000	JB5-3	Jumper Bars	1000	600	13.4	-	50	1500
1SNK905303R0000	JB5-3	Jumper Bars	1000	600	13.4	-	50	1500
1SNK905303R0000	JB5-3	Jumper Bars	1000	600	13.4	-	50	1500
1SNK905303R0000	JB5-3	Jumper Bars	1000	600	13.4	-	50	1500
1SNK905303R0000	JB5-3	Jumper Bars	1000	600	13.4	-	50	1500
1SNK905303R0000	JB5-3	Jumper Bars	1000	600	13.4	-	50	1500
1SNK905303R0000	JB5-3	Jumper Bars	1000	600	13.4	-	50	1500
1SNK905305R0000	JB5-5	Jumper Bars	1000	600	23.8	-	50	1500
1SNK905305R0000	JB5-5	Jumper Bars	1000	600	23.8	-	50	1500
1SNK905305R0000	JB5-5	Jumper Bars	1000	600	23.8	-	50	1500
1SNK905305R0000	JB5-5	Jumper Bars	1000	600	23.8	-	50	1500
1SNK905305R0000	JB5-5	Jumper Bars	1000	600	23.8	-	50	1500

1-1773976-4\_EN\_Index\_TE



# Index

## Additional technical data

Part Number	Type	Description	Rated voltage (IEC) V	Rated voltage (UL/CSA) V	Length mm	Height mm	Units per box	Units per carton
1SNK905305R0000	JB5-5	Jumper Bars	1000	600	23.8	-	50	1500
1SNK905305R0000	JB5-5	Jumper Bars	1000	600	23.8	-	50	1500
1SNK905305R0000	JB5-5	Jumper Bars	1000	600	23.8	-	50	1500
1SNK905305R0000	JB5-5	Jumper Bars	1000	600	23.8	-	50	1500
1SNK905305R0000	JB5-5	Jumper Bars	1000	600	23.8	-	50	1500
1SNK905305R0000	JB5-5	Jumper Bars	1000	600	23.8	-	50	1500
1SNK905305R0000	JB5-5	Jumper Bars	1000	600	23.8	-	50	1500
1SNK905310R0000	JB5-10	Jumper Bars	1000	600	49.8	-	30	900
1SNK905310R0000	JB5-10	Jumper Bars	1000	600	49.8	-	30	900
1SNK905310R0000	JB5-10	Jumper Bars	1000	600	49.8	-	30	900
1SNK905310R0000	JB5-10	Jumper Bars	1000	600	49.8	-	30	900
1SNK905310R0000	JB5-10	Jumper Bars	1000	600	49.8	-	30	900
1SNK905310R0000	JB5-10	Jumper Bars	1000	600	49.8	-	30	900
1SNK905310R0000	JB5-10	Jumper Bars	1000	600	49.8	-	30	900
1SNK905310R0000	JB5-10	Jumper Bars	1000	600	49.8	-	30	900
1SNK905310R0000	JB5-10	Jumper Bars	1000	600	49.8	-	30	900
1SNK905310R0000	JB5-10	Jumper Bars	1000	600	49.8	-	30	900
1SNK905310R0000	JB5-10	Jumper Bars	1000	600	49.8	-	30	900
1SNK905310R0000	JB5-10	Jumper Bars	1000	600	49.8	-	30	900
1SNK906302R0000	JB6-2	Jumper Bars	1000	600	9	-	50	1500
1SNK906302R0000	JB6-2	Jumper Bars	1000	600	9	-	50	1500
1SNK906302R0000	JB6-2	Jumper Bars	1000	600	9	-	50	1500
1SNK906302R0000	JB6-2	Jumper Bars	1000	600	9	-	50	1500
1SNK906302R0000	JB6-2	Jumper Bars	1000	600	9	-	50	1500
1SNK906302R0000	JB6-2	Jumper Bars	1000	600	9	-	50	1500
1SNK906302R0000	JB6-2	Jumper Bars	1000	600	9	-	50	1500
1SNK906302R0000	JB6-2	Jumper Bars	1000	600	9	-	50	1500
1SNK906302R0000	JB6-2	Jumper Bars	1000	600	9	-	50	1500
1SNK906302R0000	JB6-2	Jumper Bars	1000	600	9	-	50	1500
1SNK906302R0000	JB6-2	Jumper Bars	1000	600	9	-	50	1500
1SNK906303R0000	JB6-3	Jumper Bars	1000	600	15	-	50	1500
1SNK906303R0000	JB6-3	Jumper Bars	1000	600	15	-	50	1500
1SNK906303R0000	JB6-3	Jumper Bars	1000	600	15	-	50	1500
1SNK906303R0000	JB6-3	Jumper Bars	1000	600	15	-	50	1500
1SNK906303R0000	JB6-3	Jumper Bars	1000	600	15	-	50	1500
1SNK906303R0000	JB6-3	Jumper Bars	1000	600	15	-	50	1500
1SNK906303R0000	JB6-3	Jumper Bars	1000	600	15	-	50	1500
1SNK906303R0000	JB6-3	Jumper Bars	1000	600	15	-	50	1500
1SNK906303R0000	JB6-3	Jumper Bars	1000	600	15	-	50	1500
1SNK906303R0000	JB6-3	Jumper Bars	1000	600	15	-	50	1500
1SNK906303R0000	JB6-3	Jumper Bars	1000	600	15	-	50	1500
1SNK906303R0000	JB6-3	Jumper Bars	1000	600	15	-	50	1500
1SNK906303R0000	JB6-3	Jumper Bars	1000	600	15	-	50	1500

1-1773976-4\_EN\_Index\_TE



# Index

## Additional technical data


Part Number	Type	Description	Rated voltage (IEC) V	Rated voltage (UL/CSA) V	Length mm	Height mm	Units per box	Units per carton
1SNK906305R0000	JB6-5	Jumper Bars	1000	600	27	-	50	1500
1SNK906305R0000	JB6-5	Jumper Bars	1000	600	27	-	50	1500
1SNK906305R0000	JB6-5	Jumper Bars	1000	600	27	-	50	1500
1SNK906305R0000	JB6-5	Jumper Bars	1000	600	27	-	50	1500
1SNK906305R0000	JB6-5	Jumper Bars	1000	600	27	-	50	1500
1SNK906305R0000	JB6-5	Jumper Bars	1000	600	27	-	50	1500
1SNK906305R0000	JB6-5	Jumper Bars	1000	600	27	-	50	1500
1SNK906305R0000	JB6-5	Jumper Bars	1000	600	27	-	50	1500
1SNK906305R0000	JB6-5	Jumper Bars	1000	600	27	-	50	1500
1SNK906310R0000	JB6-10	Jumper Bars	1000	600	57	-	20	600
1SNK906310R0000	JB6-10	Jumper Bars	1000	600	57	-	20	600
1SNK906310R0000	JB6-10	Jumper Bars	1000	600	57	-	20	600
1SNK906310R0000	JB6-10	Jumper Bars	1000	600	57	-	20	600
1SNK906310R0000	JB6-10	Jumper Bars	1000	600	57	-	20	600
1SNK906310R0000	JB6-10	Jumper Bars	1000	600	57	-	20	600
1SNK906310R0000	JB6-10	Jumper Bars	1000	600	57	-	20	600
1SNK906310R0000	JB6-10	Jumper Bars	1000	600	57	-	20	600
1SNK906310R0000	JB6-10	Jumper Bars	1000	600	57	-	20	600
1SNK906310R0000	JB6-10	Jumper Bars	1000	600	57	-	20	600
1SNK908302R0000	JB8-2	Jumper Bars	1000	600	13.6	-	50	1500
1SNK908302R0000	JB8-2	Jumper Bars	1000	600	13.6	-	50	1500
1SNK908302R0000	JB8-2	Jumper Bars	1000	600	13.6	-	50	1500
1SNK908303R0000	JB8-3	Jumper Bars	1000	600	21.6	-	50	1500
1SNK908303R0000	JB8-3	Jumper Bars	1000	600	21.6	-	50	1500
1SNK908303R0000	JB8-3	Jumper Bars	1000	600	21.6	-	50	1500
1SNK908305R0000	JB8-5	Jumper Bars	1000	600	37.6	-	40	1200
1SNK908305R0000	JB8-5	Jumper Bars	1000	600	37.6	-	40	1200
1SNK908305R0000	JB8-5	Jumper Bars	1000	600	37.6	-	40	1200
1SNK908310R0000	JB8-10	Jumper Bars	1000	600	77.6	-	20	600
1SNK908310R0000	JB8-10	Jumper Bars	1000	600	77.6	-	20	600
1SNK908310R0000	JB8-10	Jumper Bars	1000	600	77.6	-	20	600
1SNK910302R0000	JB10-2	Jumper Bars	1000	600	18.5	-	50	1500
1SNK910302R0000	JB10-2	Jumper Bars	1000	600	18.5	-	50	1500
1SNK910303R0000	JB10-3	Jumper Bars	1000	600	28	-	50	1500
1SNK910303R0000	JB10-3	Jumper Bars	1000	600	28	-	50	1500
1SNK910305R0000	JB10-5	Jumper Bars	1000	600	48	-	30	900
1SNK910305R0000	JB10-5	Jumper Bars	1000	600	48	-	30	900
1SNK910310R0000	JB10-10	Jumper Bars	1000	600	98	-	20	600

1-1773976-4\_EN\_Index\_TE

## Index

### Additional technical data

Part Number	Type	Description	Rated voltage	Rated voltage	Length	Height	Units per box	Units per carton
			(IEC) V	(UL/CSA) V	mm	mm		
1SNK910310R0000	JB10-10	Jumper Bars	1000	600	98	-	20	600
1SNK912302R0000	JB12-2	Jumper Bars	1000	600	20	-	50	1500
1SNK912302R0000	JB12-2	Jumper Bars	1000	600	20	-	50	1500
1SNK912303R0000	JB12-3	Jumper Bars	1000	600	32	-	50	1500
1SNK912303R0000	JB12-3	Jumper Bars	1000	600	32	-	50	1500
1SNK912305R0000	JB12-5	Jumper Bars	1000	600	56	-	20	600
1SNK912305R0000	JB12-5	Jumper Bars	1000	600	56	-	20	600
1SNK916302R0000	JB16-2	Jumper Bars	1000	600	27.5	-	10	1000
1SNK916302R0000	JB16-2	Jumper Bars	1000	600	27.5	-	10	1000
1SNK916303R0000	JB16-3	Jumper Bars	1000	600	43.5	-	10	500
1SNK916303R0000	JB16-3	Jumper Bars	1000	600	43.5	-	10	500
1SNK916305R0000	JB16-5	Jumper Bars	1000	600	75.5	-	10	500
1SNK916305R0000	JB16-5	Jumper Bars	1000	600	75.5	-	10	500
1SNK916310R0000	JB16-10	Jumper Bars	1000	600	155.5	-	10	250
1SNK916310R0000	JB16-10	Jumper Bars	1000	600	155.5	-	10	250
1SNK922302R0000	JB22-2	Jumper Bars	1000	600	35	-	5	105
1SNK922303R0000	JB22-3	Jumper Bars	1000	600	57	-	5	105
1SNK922305R0000	JB22-5	Jumper Bars	1000	600	101	-	5	105
1SNK922310R0000	JB22-10	Jumper Bars	1000	600	211	-	5	45
1SNK926302R0000	JB26-2	Jumper Bars	1000	600	42	-	5	105
1SNK926303R0000	JB26-3	Jumper Bars	1000	600	68	-	5	105
1SNK926305R0000	JB26-5	Jumper Bars	1000	600	120	-	5	90
1SNK926310R0000	JB26-10	Jumper Bars	1000	600	250	-	5	45
1SNL308010R0000	DBL80	Power Distribution Blocks	-	1000	66	-	1	80
1SNL312510R0000	DBL125	Power Distribution Blocks	-	1000	75	-	1	75
1SNL312530R0000	DBL125-3	Power Distribution Blocks	-	1000	75	-	1	25
1SNL316010R0000	DBL160	Power Distribution Blocks	-	1000	75	-	1	75
1SNL317510R0000	DBL175	Power Distribution Blocks	-	1000	72.5	-	1	40
1SNL317531R0000	DBL175-C-3	Power Distribution Blocks	-	1000	75	-	1	25
1SNL325010R0000	DBL250	Power Distribution Blocks	-	1000	96	-	1	20
1SNL325060R0000	DBL250-F	Power Distribution Blocks	-	1000	75	-	1	20
1SNL340010R0000	DBL400	Power Distribution Blocks	-	1000	96	-	1	20
1SNL340011R0000	DBL400-PV	Power Distribution Blocks	-	1000	96	-	1	20
1SNL850001R0000	DBL500-22	Power Distribution Blocks	-	1000	96	-	1	20

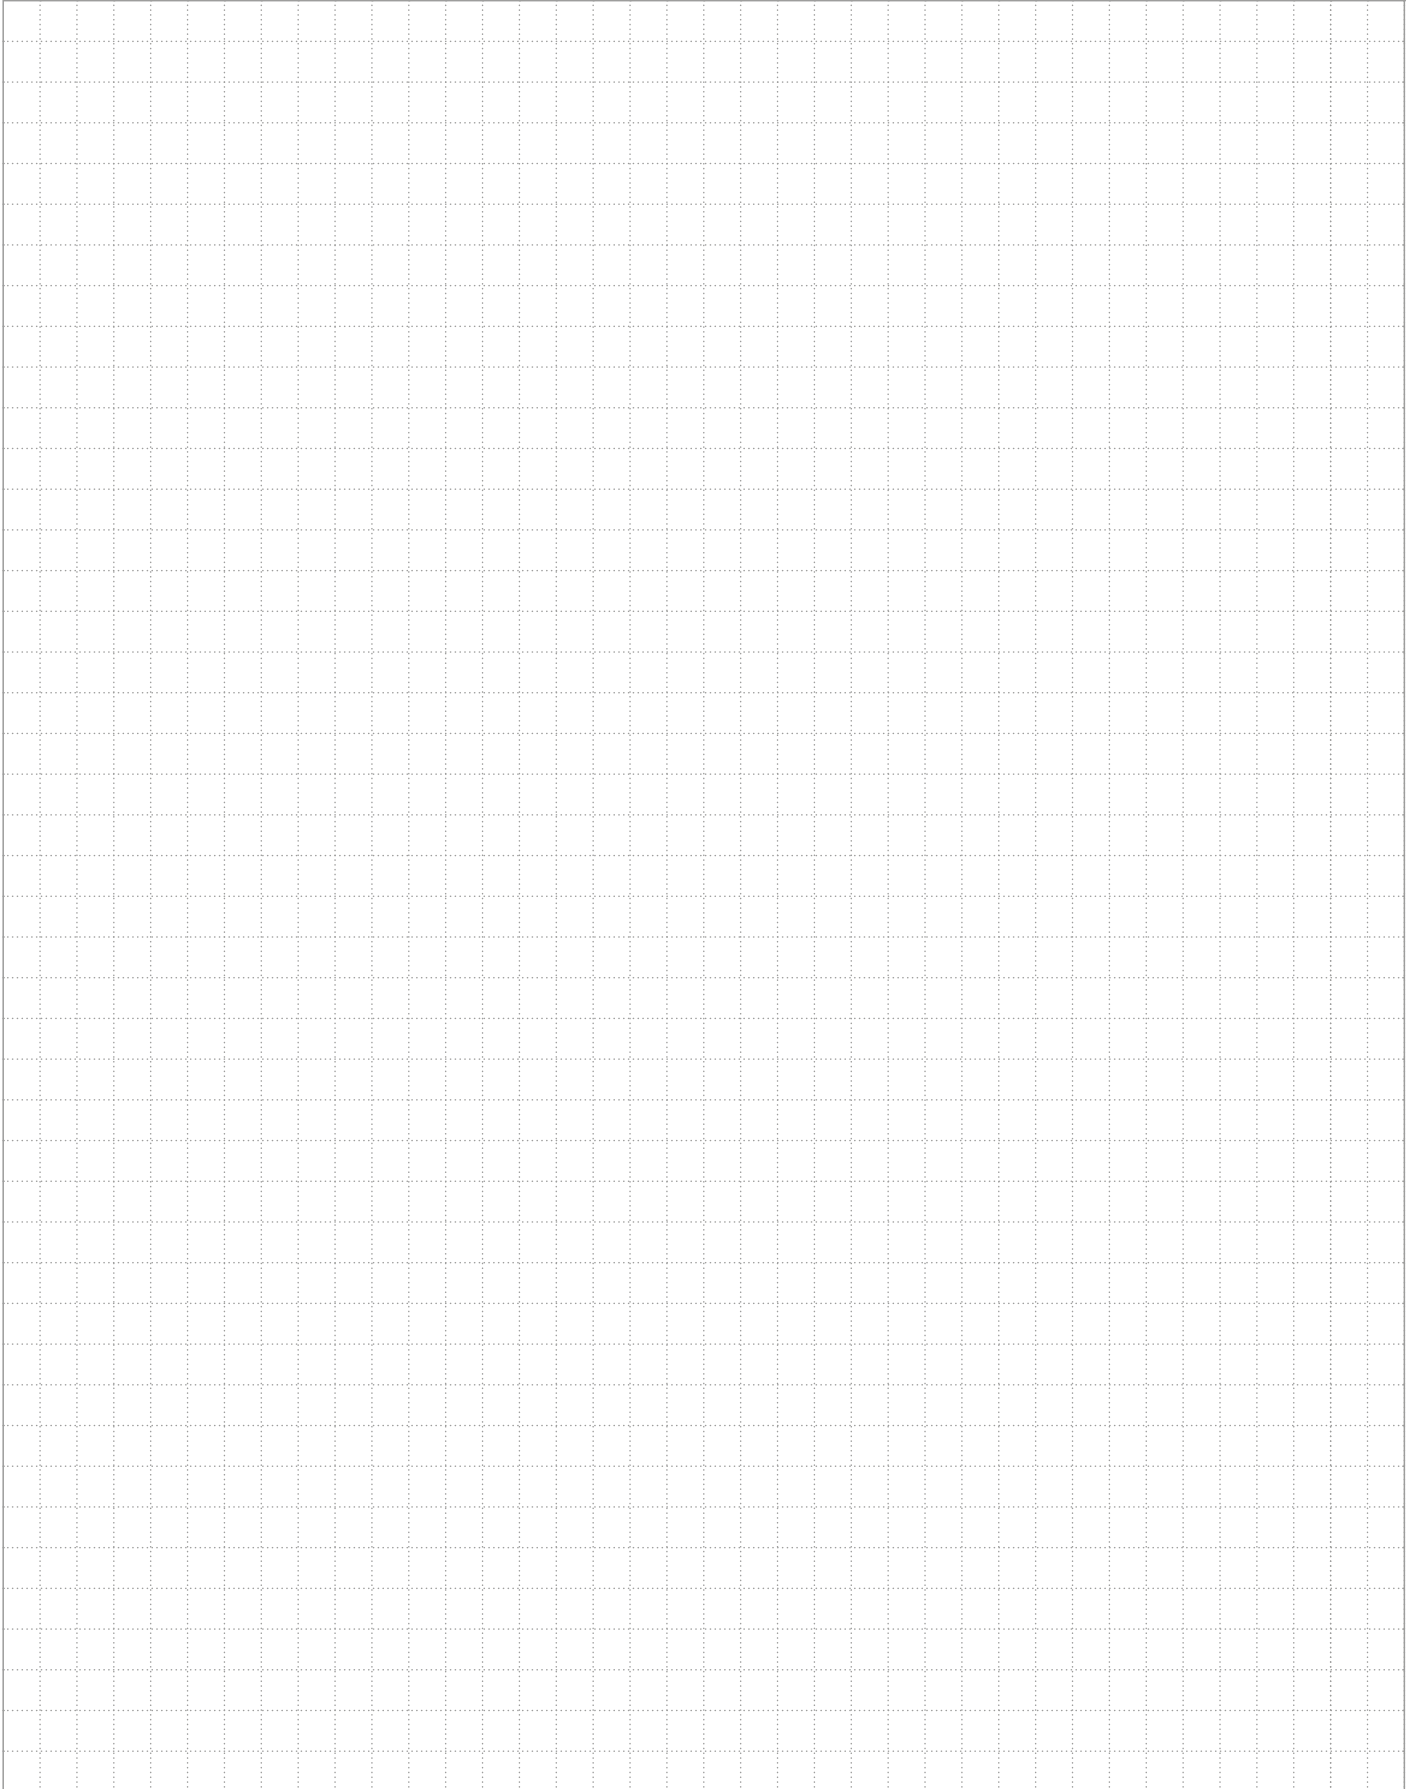



## LET'S CONNECT

We make it easy to connect with our experts and are ready to provide all the support you need. For additional information or product assistance, please contact your field representative or our customer service department. Additional information is also available on the website <http://www.te.com/entrelec>.

## TECHNICAL SUPPORT

[te.com/support-center](http://te.com/support-center)

### Asia:

+86 400-820-6015

### Europe, Middle East, & Africa:

+49 6251-133-0

### North America:

+1-888-441-9982

## te.com

ENTRELEC, TE Connectivity, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2019 TE Connectivity Ltd. family of companies All Rights Reserved.

1-1773976-4\_EN

06/19

### TE Connectivity

3, rue Jean Perrin  
69687 Chassieu cedex  
France

Tel: +33 472172222

[www.te.com/](http://www.te.com/)