

GET IN TOUCH WITH ARTEOR™

A WORLD OF NEW POSSIBILITIES

-WIRING DEVICES-



THE GLOBAL SPECIALIST
IN ELECTRICAL AND DIGITAL BUILDING INFRASTRUCTURES

 legrand®

GLOBAL SOLUTIONS

ARTEOR™ IS TRULY INTERNATIONAL

Across our globalised world, people's needs and expectations are increasingly converging. The same can be said of lifestyles and the desire for greater convenience, security and an efficient use of resources. Although this genuinely global trend is fuelled by technology, barriers do still exist in the form of regional standards. Arteor helps overcome these obstacles and enables planners and developers operating at a global level to implement their projects all over the world. This is achieved by setting the same high standards, regardless of location, in terms of functionality, design, simplicity of installation, configuration and use.

The Arteor range is remarkably modular, enabling the implementation of complex projects of any scale and complexity without having to compromise on the systems used. Arteor also supports integration of technologies from third parties, which is an increasingly important criterion for international projects in general, and hotel projects in particular.





TIMELESS HARMONY

NEW NEUTRAL FINISHES





MAGNESIUM



SOFT ALU



WHITE



legrand



legrand

NEUTRAL FULL COLOUR

This neutral and minimalist collection leaves plenty of room for contemporary design concepts. An extended colour range with new plate and mechanism colours gives designers even greater freedom.



CHAMPAGNE

NEW COMBINATIONS

Arteor meets customisation requirements by offering more ways to combine colours. But the more technology shapes our lives, the more we want it to blend in discreetly with our individual environments. This is why clean lines and a pared-down look define the design philosophy of the range.



DARK BRONZE



legrand

GRAPHITE

STRONG IMPACT

A WIDER CHOICE OF METALS



REFLECTIVE METAL

A new collection made of metal finishes provides a suitably brilliant solution for more demanding projects. Elegantly discreet despite their mirror finish, these switches blend seamlessly into their environment. Available in gold and other colours, they give a definite nod to the technology involved.



STAINLESS STEEL



GOLD



BRUSHED METAL

Two further colours have been added to this relatively neutral but prestigious collection of brushed metal finishes. "Pink Champagne" (a warm, reddish brown) and "Black" offer designers a wider choice for high-end applications.



STAINLESS STEEL

GOLD BRASS

BLACK

PINK CHAMPAGNE

OUT OF THE BOX

ARTEOR™ ON TREND




CUBE

In the Wood collection, nature and technology combine to create an original, appealing finish. The unique texture of Signature Cube turns this extraordinary finish into a sophisticated modern design element and creates a unique combination of look and feel.



GREY OAK

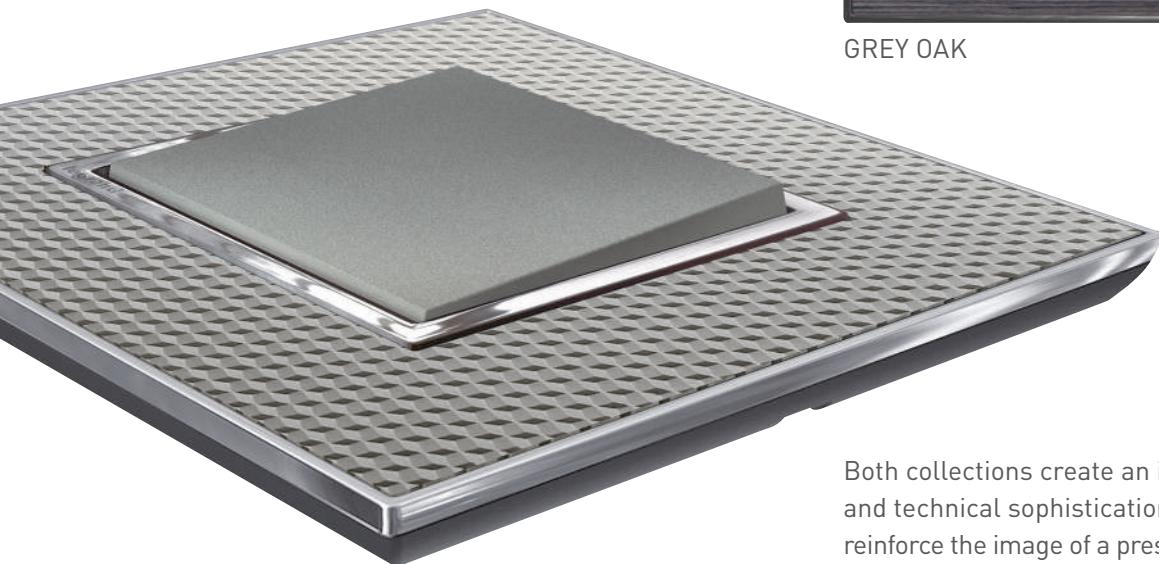

Both collections create an impression of discretion and technical sophistication. Chromed metal accents reinforce the image of a prestigious product. A bevelled profile ensures an on-trend slimline look.

KEEP IN TOUCH


NEW ARTEOR™ FUNCTIONS



You have to be connected to get on. This is why options to charge mobile devices, wherever you may be, are so essential these days. Arteor offers chargers in various versions for this very reason, whether you're out and about, at home, in a hotel, or at the office. USB chargers or wireless chargers – they both allow to keep your mobile devices charged and running, anywhere and any time.

ALWAYS FULL POWER


Conveniently placed USB chargers allow you to charge your mobile devices easily wherever it's handy. Arteor has a suitable solution for every kind of mobile device – including, of course for the new generation with USB C-Type connection.

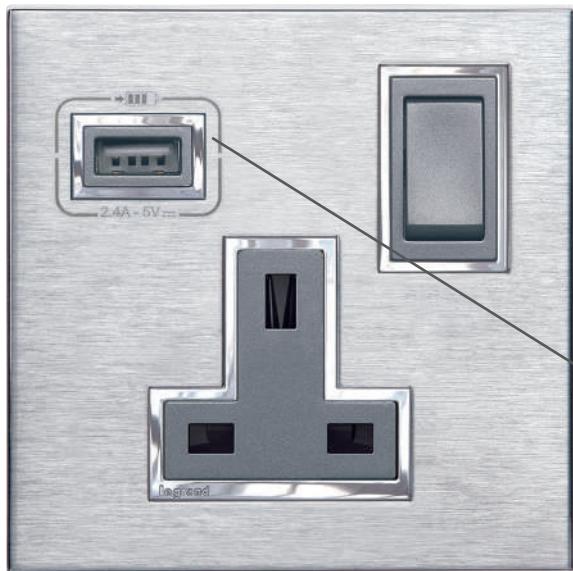


13 A BS SOCKET OUTLET WITH USB A-TYPE CHARGER

THE NEW 13 A BS SOCKET OUTLET WITH USB CHARGER

The 1-gang 13 A BS socket is equipped with a 3 A – 5 V⎓ – 15 W USB A-Type charging port. The socket outlet complies with BS 1363-2 and is **shuttered for child safety**.

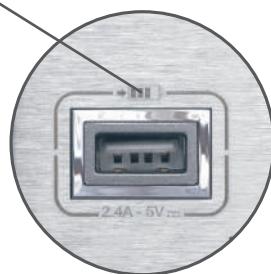

The USB charger complies with IEC 60950-1. The 3 A output is sufficient to **charge any tablet at full speed**.

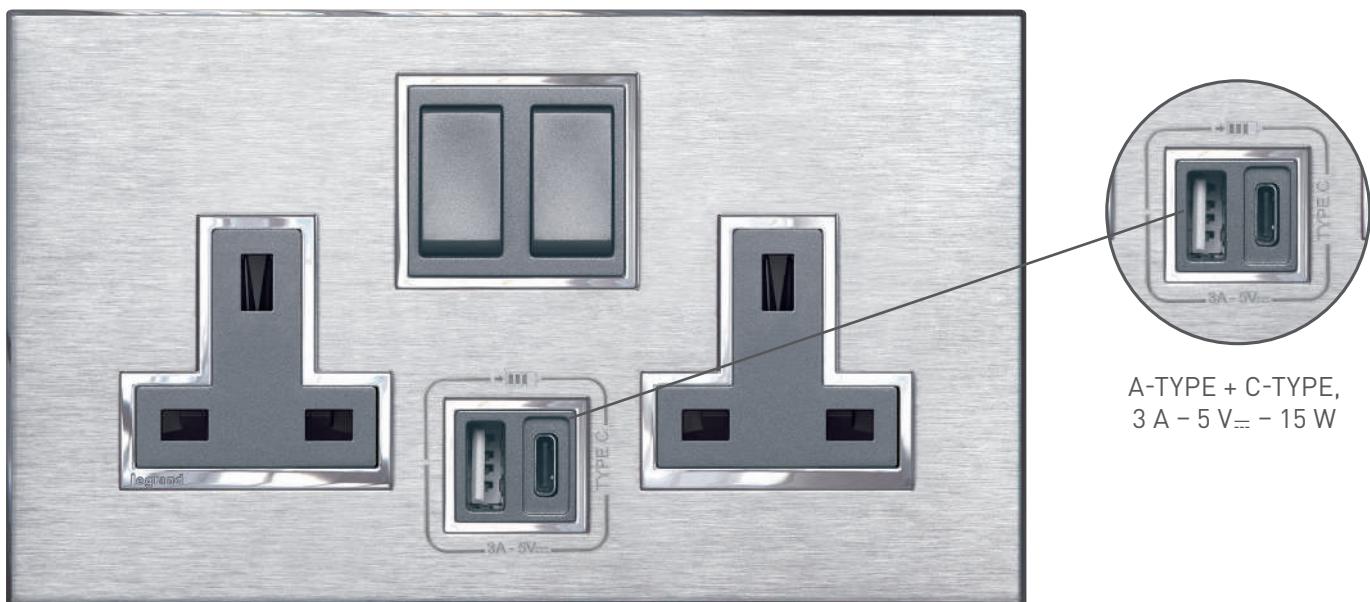

USB A-TYPE AND C-TYPE CONNECTIVITY

More and more mobile devices are equipped with the new C-Type USB. With Arteor, you are ready for this development today: the new Arteor 2-gang 13 A BS socket outlets are equipped with two different USB charging ports, A-Type and C-Type 3 A – 5 V_{DC} – 15 W (exists in 27 W as well)

USB CHARGER

These modular charging sockets with a C-Type USB charging port comply with IEC 62684-2011-1. Aesthetically pleasant, they can be used to charge any mobile device, both at work and at home.



MODULAR USB A-TYPE + C-TYPE
CHARGER 5V_{DC} – 3 A – 15W



MODULAR DOUBLE C-TYPE USB
CHARGER 5V_{DC} – 3A – 15W

WHEREVER YOU ARE

WIRELESS CHARGERS

Use at work and on the move requires a different set of features, with adaptability and robustness top of the list. With their pleasing aesthetics, Arteor chargers are even more universally suitable.



WIRELESS CHARGER + A-TYPE USB

This Arteor wireless charger features an additional A-Type USB port for simultaneous charging of two devices – a smartphone with a QI receiver via induction and a tablet via the USB port. To be mounted on the wall, installed in a cable column, or as part of a multi-outlet extension in the office or at home (e.g. in the kitchen).



QI WIRELESS CHARGER FOR INTEGRATION INTO FURNITURE

The QI wireless charger comes with an extra-slim design for integration into furniture, e.g. in meeting rooms, offices or public spaces. Also suitable for kitchen worktops at home. Supplied with external 110 – 240 V universal power supply. Plugs comply with European, BS, US and Australian/Chinese standards.



FLUSH-MOUNTED WIRELESS CHARGER FOR PUBLIC AREAS

IK 08 – IP 66, impact-resistant and weatherproof design, specifically created for public areas such as restaurants, waiting rooms, libraries, passageways or transit areas, and even swimming pools.



Wireless Power Consortium: 750 members, ensuring interoperability with induction-compatible phones.

QI: global standard adopted by vehicle manufacturers/café/restaurants/hotels

 Legrand is member of the Wireless Power Consortium. Legrand wireless chargers are conform to the QI WPC standard.

THE RIGHT M O O D

ARTEOR™ LIGHTING SOLUTIONS

Light creates atmosphere, emphasizes room features and helps overcome emergencies. Arteor solutions provide bright prospects for developers and decorators who want to make a very deliberate use of lighting in their projects.



UNIVERSAL PUSH-BUTTON DIMMER FOR ALL TYPES OF LAMPS

With the Universal dimmer for all modern loads including dimmable CFLs and LEDs Arteor makes it easy to create individual lighting moods.

Convenient to use:

33% and 66% luminance are preset, and there is a level memory function too. The night light function with its slow dimming feature is a practical solution for bedrooms or children's rooms.


Easy installation:

Two cables are enough as a neutral wire is not required – ideal for renovations or installation work carried out at a later time.



READING LIGHT AND REMOVABLE TORCH

Having just the right light for every situation is not just handy, but also deeply reassuring. Arteor provides this security through specific solutions that fit harmoniously with the overall design of the installation while bringing users genuine added value.

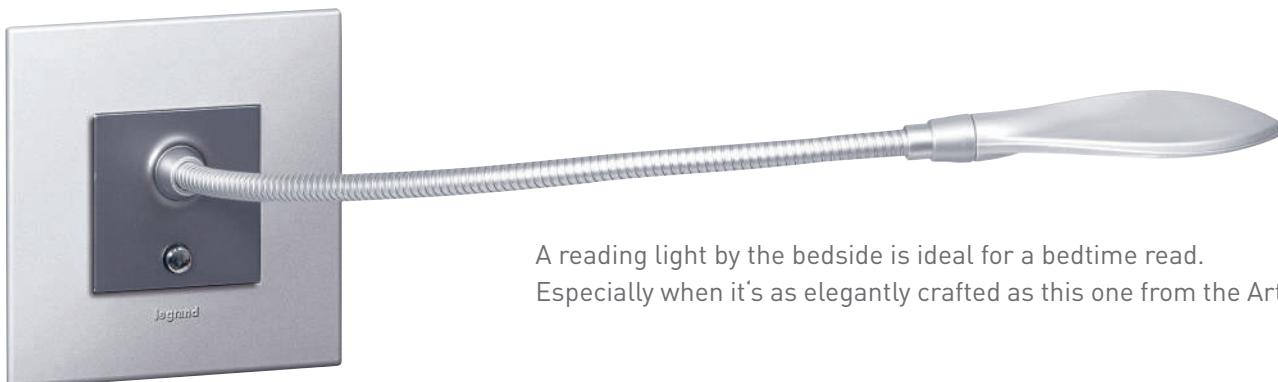

A reading light by the bedside is ideal for a bedtime read. Especially when it's as elegantly crafted as this one from the Arteor range.



This compact battery lamp is both an emergency light and a torch at once. It comes on automatically in the event of a power cut and can easily be unplugged from its holder for handheld use.



Arteor™ Switches and Push Buttons with COC to Singapore requirements



Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Intermediate Switches 10 AX - 250 V~	Pack	Cat.Nos	Switches 20 AX - 250 V~
5	5 720 08	Intermediate switch <input type="radio"/> White - 1 module <input checked="" type="radio"/> Magnesium - 1 module <input type="radio"/> Champagne - 1 module <input type="radio"/> Soft Alu - 1 module	10	5 720 10	2-way switch <input type="radio"/> White - 1 module <input checked="" type="radio"/> Magnesium - 1 module <input type="radio"/> Champagne - 1 module <input type="radio"/> Soft Alu - 1 module
5	5 725 08		10	5 725 10	
5	5 700 08		10	5 700 10	
5	5 710 08		10	5 710 10	
Push-buttons 6 A - 250 V~		2-way switch with indicator To be equipped with LED (p. 25) <input type="radio"/> White - 1 module <input checked="" type="radio"/> Magnesium - 1 module <input type="radio"/> Champagne - 1 module <input type="radio"/> Soft Alu - 1 module		1-way push-button <input type="radio"/> White - 1 module <input checked="" type="radio"/> Magnesium - 1 module <input type="radio"/> Champagne - 1 module <input type="radio"/> Soft Alu - 1 module	
10	5 720 00		10	5 720 11	
10	5 725 00		5	5 725 11	
10	5 700 00		5	5 723 83	
10	5 710 00		5	5 723 82	
1-way push-button with bell symbol <input type="radio"/> White - 1 module <input checked="" type="radio"/> Magnesium - 1 module <input type="radio"/> Champagne - 1 module <input type="radio"/> Soft Alu - 1 module		1-way double pole switch <input type="radio"/> White - 1 module <input checked="" type="radio"/> Magnesium - 1 module <input type="radio"/> Red - 1 module			
5	5 720 15		5	5 720 13	
5	5 725 15		5	5 725 13	
5	5 730 37		5	5 724 51	
5	5 730 36		10	5 720 46	
1-way push-button with locator and bell symbol Equipped with blue LED		1-way double pole switch with indicator Red LED supplied <input type="radio"/> White - 1 module <input checked="" type="radio"/> Magnesium - 1 module			
5	5 720 16		5	5 720 14	
5	5 725 16		5	5 725 14	
5	5 730 41		10	5 720 47	
5	5 730 40		10	5 725 47	
		1-way double pole switch with indicator and "WATER HEATER" marking Red LED supplied <input type="radio"/> White - 2 modules <input checked="" type="radio"/> Magnesium - 2 modules <input type="radio"/> Champagne - 2 modules <input type="radio"/> Soft Alu - 2 modules			
		2-way double pole switch <input type="radio"/> White - 2 modules <input checked="" type="radio"/> Magnesium - 2 modules <input type="radio"/> Champagne - 2 modules <input type="radio"/> Soft Alu - 2 modules			

Support frames and plates,
p. 45 and 54 to 63




Arteor™ Sockets with COC to Singapore requirements



5 721 43



5 710 48

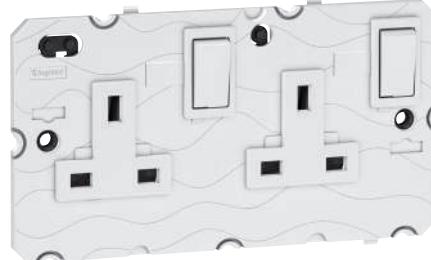

5 721 45



5 726 30

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)
Support frame not needed

Pack	Cat.Nos	Single pole socket outlets 13 A - 250 V~
		Shuttered for child safety ASTA licence Conform to BS 1363 Part 2 Use special plates
10	5 721 43	2P+E switched - 1-gang ○ White ● Magnesium ○ Champagne ○ Soft Alu
10	5 726 43	
10	5 700 48	
10	5 710 48	
10	5 721 44	2P+E switched + neon - 1-gang ○ White ● Magnesium ○ Champagne ○ Soft Alu
10	5 726 44	
10	5 724 45	
10	5 724 44	
5	5 721 45	2P+E switched - 2-gang ○ White ● Magnesium ○ Champagne ○ Soft Alu
5	5 726 45	
5	5 700 49	
5	5 710 49	
5	5 721 46	2P+E switched + neon - 2-gang ○ White ● Magnesium ○ Champagne ○ Soft Alu
5	5 726 46	
5	5 724 47	
5	5 724 46	

Pack	Cat.Nos	British standard socket outlets
		Shuttered for child safety ASTA licence Conform to BS 1363 Part 2
5	5 721 32	2P+E switched - 15 A Conform to BS 546 3 modules ○ White ● Magnesium ○ Champagne ○ Soft Alu
5	5 726 32	
5	5 700 45	
5	5 710 45	
5	5 721 30	2P+E switched - 13 A Conform to BS 1363 Part 2 ASTA licence 3 modules ○ White ● Magnesium ○ Champagne ○ Soft Alu ● Red dedicated non standard pin
5	5 726 30	
5	5 700 44	
5	5 710 44	
5	5 724 67	

Arteor™ mechanical switches

square version



Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Switches 10 AX - 250 V~	Pack	Cat.Nos	Switches 20 AX - 250 V~
		1-way switch			1-way switch
10	5 720 04	White - 1 module	10	5 720 09	White - 1 module
10	5 725 04	● Magnesium - 1 module	10	5 725 09	● Magnesium - 1 module
10	5 700 04	■ Champagne - 1 module	10	5 700 09	■ Champagne - 1 module
10	5 710 04	○ Soft Alu - 1 module	10	5 710 09	○ Soft Alu - 1 module
10	5 724 50	● Red - 1 module	10	5 720 41	○ White - 2 modules
10	5 720 34	White - 2 modules	10	5 725 41	● Magnesium - 2 modules
10	5 725 34	● Magnesium - 2 modules	10	5 723 81	■ Champagne - 2 modules
10	5 700 34	■ Champagne - 2 modules	10	5 723 80	○ Soft Alu - 2 modules
10	5 710 34	○ Soft Alu - 2 modules			2-way switch
10	5 720 05	White - 1 module	10	5 720 10	White - 1 module
10	5 725 05	● Magnesium - 1 module	10	5 725 10	● Magnesium - 1 module
10	5 700 05	■ Champagne - 1 module	10	5 700 10	■ Champagne - 1 module
10	5 710 05	○ Soft Alu - 1 module	10	5 710 10	○ Soft Alu - 1 module
10	5 720 35	White - 2 modules	10	5 720 11	○ White - 1 module
10	5 725 35	● Magnesium - 2 modules	5	5 725 11	● Magnesium - 1 module
10	5 700 35	■ Champagne - 2 modules	5	5 723 83	■ Champagne - 1 module
10	5 710 35	○ Soft Alu - 2 modules	5	5 723 82	○ Soft Alu - 1 module
		2-way switch with indicator	10	5 720 42	○ White - 2 modules
		To be equipped with LED (p. 25)	5	5 725 42	● Magnesium - 2 modules
10	5 720 06	White - 1 module	5	5 723 85	■ Champagne - 2 modules
10	5 725 06	● Magnesium - 1 module	5	5 723 84	○ Soft Alu - 2 modules
10	5 721 75	■ Champagne - 1 module			2-way switch with indicator
10	5 721 74	○ Soft Alu - 1 module	10	5 720 43	To be equipped with LED (p. 25)
5	5 720 36	White - 2 modules	10	5 725 43	○ White - 1 module
5	5 725 36	● Magnesium - 2 modules	10	5 723 87	● Magnesium - 1 module
5	5 721 77	■ Champagne - 2 modules	10	5 723 86	■ Champagne - 1 module
5	5 721 76	○ Soft Alu - 2 modules			2-way switch with indicator and label-holder
5	5 720 37	White - 2 modules	10	5 720 44	○ White - 2 modules
5	5 725 37	● Magnesium - 2 modules	10	5 725 44	● Magnesium - 2 modules
		Intermediate switch	10	5 723 89	■ Champagne - 2 modules
		To be equipped with LED (p. 25)	10	5 723 88	○ Soft Alu - 2 modules
5	5 720 08	White - 1 module			2 x 2-way switch + 1-way switch - 3-gang
5	5 725 08	● Magnesium - 1 module	5	5 720 13	○ White - 2 modules
5	5 700 08	■ Champagne - 1 module	5	5 725 13	● Magnesium - 2 modules
5	5 710 08	○ Soft Alu - 1 module	5	5 721 83	■ Champagne - 2 modules
10	5 720 38	White - 2 modules	5	5 721 82	○ Soft Alu - 1 module
10	5 725 38	● Magnesium - 2 modules	5	5 724 51	● Red - 1 module
10	5 721 66	■ Champagne - 2 modules	10	5 720 46	○ White - 2 modules
10	5 721 65	○ Soft Alu - 2 modules	10	5 725 46	● Magnesium - 2 modules
		Double pole switch	10	5 721 85	■ Champagne - 2 modules
10	5 720 40	White - 2 modules	10	5 721 84	○ Soft Alu - 2 modules
5	5 725 40	● Magnesium - 2 modules			1-way double pole switch
5	5 721 79	■ Champagne - 2 modules			To be equipped with LED (p. 25)
5	5 721 78	○ Soft Alu - 2 modules			○ White - 1 module

Support frames
and plates,
p. 45 and 54 to 63



Arteor™ mechanical switches

square version (continued)




5 720 49

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Switches 20 AX - 250 V~ (continued)
1-way double pole switch with indicator		
5	5 720 14	Red LED supplied ○ White - 1 module
5	5 725 14	● Magnesium - 1 module
5	5 721 87	○ Champagne - 1 module
5	5 721 86	○ Soft Alu - 1 module
10	5 720 47	○ White - 2 modules
10	5 725 47	● Magnesium - 2 modules
10	5 721 89	○ Champagne - 2 modules
10	5 721 88	○ Soft Alu - 2 modules
1-way double pole switch with indicator and "WATER HEATER" marking		
10	5 720 49	Red LED supplied ○ White - 2 modules
10	5 725 49	● Magnesium - 2 modules
10	5 721 91	○ Champagne - 2 modules
10	5 721 90	○ Soft Alu - 2 modules
2-way double pole switch		
10	5 720 48	○ White - 2 modules
10	5 725 48	● Magnesium - 2 modules
10	5 721 93	○ Champagne - 2 modules
10	5 721 92	○ Soft Alu - 2 modules

Arteor™ mechanical switches

round version

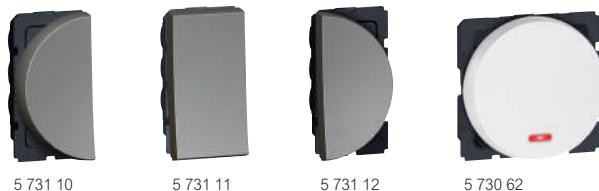

Switches 10 AX - 250 V~

10	5 730 10	1-way switch ○ White - 1 left module
10	5 731 10	● Magnesium - 1 left module
10	5 700 62	○ Champagne - 1 left module
10	5 710 62	○ Soft Alu - 1 left module
10	5 730 11	○ White - 1 middle module
10	5 731 11	● Magnesium - 1 middle module
10	5 730 12	○ White - 1 right module
10	5 731 12	● Magnesium - 1 right module
10	5 700 63	○ Champagne - 1 right module
10	5 710 63	○ Soft Alu - 1 right module
10	5 730 60	○ White - 2 modules
10	5 731 60	● Magnesium - 2 modules
10	5 700 66	○ Champagne - 2 modules
10	5 710 66	○ Soft Alu - 2 modules
10	5 730 13	2-way switch ○ White - 1 left module
10	5 731 13	● Magnesium - 1 left module
10	5 700 64	○ Champagne - 1 left module
10	5 710 64	○ Soft Alu - 1 left module
10	5 730 14	○ White - 1 middle module
10	5 731 14	● Magnesium - 1 middle module
10	5 730 15	○ White - 1 right module
10	5 731 15	● Magnesium - 1 right module
10	5 700 65	○ Champagne - 1 right module
10	5 710 65	○ Soft Alu - 1 right module
10	5 730 61	○ White - 2 modules
10	5 731 61	● Magnesium - 2 modules
10	5 700 67	○ Champagne - 2 modules
10	5 710 67	○ Soft Alu - 2 modules
5	5 730 16	2-way switch with indicator To be equipped with LED (p. 25)
5	5 731 16	○ White - 1 left module
5	5 731 34	● Magnesium - 1 left module
5	5 731 34	○ Soft Alu - 1 left module
5	5 730 17	○ White - 1 middle module
5	5 731 17	● Magnesium - 1 middle module
5	5 731 35	○ Soft Alu - 1 middle module
5	5 730 18	○ White - 1 right module
5	5 731 18	● Magnesium - 1 right module
5	5 731 36	○ Soft Alu - 1 right module
5	5 730 62	○ White - 2 modules
5	5 731 62	● Magnesium - 2 modules
5	5 731 37	○ Soft Alu - 2 modules
10	5 730 63	Intermediate switch
5	5 731 63	○ White - 2 modules
5	5 730 67	● Magnesium - 2 modules
5	5 730 67	○ Soft Alu - 2 modules
5	5 730 65	Double pole switch
5	5 731 65	○ White - 2 modules
5	5 731 38	● Magnesium - 2 modules
5	5 731 38	○ Soft Alu - 2 modules

Arteor™ mechanical switches

round version (continued)



5 731 26



5 731 28



5 730 72



5 731 30



5 731 31



5 731 76

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Switches 20 AX - 250 V~
1-way switch		
10	5 730 20	○ White - 1 left module
10	5 731 20	● Magnesium - 1 left module
10	5 731 39	○ Soft Alu - 1 left module
10	5 730 21	○ White - 1 middle module
10	5 731 21	● Magnesium - 1 middle module
10	5 731 40	○ Soft Alu - 1 middle module
10	5 730 22	○ White - 1 right module
10	5 731 22	● Magnesium - 1 right module
10	5 731 41	○ Soft Alu - 1 right module
10	5 730 70	○ White - 2 modules
10	5 731 70	● Magnesium - 2 modules
10	5 731 42	○ Soft Alu - 2 modules
2-way switch		
10	5 730 23	○ White - 1 left module
10	5 731 23	● Magnesium - 1 left module
10	5 731 43	○ Soft Alu - 1 left module
10	5 730 24	○ White - 1 middle module
10	5 731 24	● Magnesium - 1 middle module
10	5 731 44	○ Soft Alu - 1 middle module
10	5 730 25	○ White - 1 right module
10	5 731 25	● Magnesium - 1 right module
10	5 731 45	○ Soft Alu - 1 right module
2-way switch with indicator To be equipped with LED (p. 25)		
5	5 730 26	○ White - 1 left module
5	5 731 26	● Magnesium - 1 left module
5	5 730 28	○ White - 1 right module
5	5 731 28	● Magnesium - 1 right module
5	5 730 71	○ White - 2 modules
5	5 731 71	● Magnesium - 2 modules
1-way switch - 3-gang		
10	5 730 72	○ White - 2 modules
5	5 731 72	● Magnesium - 2 modules
5	5 731 46	○ Soft Alu - 2 modules
2 x 2-way switch + 1-way switch - 3-gang		
10	5 730 73	○ White - 2 modules
10	5 731 73	● Magnesium - 2 modules
10	5 731 47	○ Soft Alu - 2 modules

Pack	Cat.Nos	Switches 20 AX - 250 V~ (continued)
1-way double pole switch		
5	5 730 30	○ White - 1 left module
5	5 731 30	● Magnesium - 1 left module
1-way double pole switch with indicator Red LED supplied		
5	5 730 31	○ White - 1 right module
5	5 731 31	● Magnesium - 1 right module
10	5 730 75	○ White - 2 modules
10	5 731 75	● Magnesium - 2 modules
1-way double pole switch with indicator and "WATER HEATER" marking Red LED supplied		
10	5 730 78	○ White - 2 modules
10	5 731 78	● Magnesium - 2 modules
10	5 731 49	○ Soft Alu - 2 modules
2-way double pole switch		
10	5 730 77	○ White - 2 modules
5	5 731 77	● Magnesium - 2 modules

Support frames
and plates,
p. 45 and 54 to 63



Arteor™ push-buttons

square version



5 700 00

5 710 00

5 720 15

5 725 16

5 725 33

Arteor™ push-buttons

round version



5 730 00

5 730 01

5 730 02

5 730 52

5 731 52

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Push-buttons 6 A - 250 V~
1-way push-button		
10	5 720 00	○ White - 1 module
10	5 725 00	● Magnesium - 1 module
10	5 700 00	○ Champagne - 1 module
10	5 710 00	○ Soft Alu - 1 module
10	5 720 30	○ White - 2 modules
10	5 725 30	● Magnesium - 2 modules
10	5 730 35	○ Champagne - 2 modules
10	5 730 34	○ Soft Alu - 2 modules
1-way push-button with bell symbol		
5	5 720 15	○ White - 1 module
5	5 725 15	● Magnesium - 1 module
5	5 730 37	○ Champagne - 1 module
5	5 730 36	○ Soft Alu - 1 module
5	5 720 56	○ White - 2 modules
5	5 725 56	● Magnesium - 2 modules
5	5 730 39	○ Champagne - 2 modules
5	5 730 38	○ Soft Alu - 2 modules
1-way push-button with locator and bell symbol		
Equipped with blue LED		
5	5 720 16	○ White - 1 module
5	5 725 16	● Magnesium - 1 module
5	5 730 41	○ Champagne - 1 module
5	5 730 40	○ Soft Alu - 1 module
2-way push-button		
10	5 720 01	○ White - 1 module
5	5 725 01	● Magnesium - 1 module
5	5 730 43	○ Champagne - 1 module
5	5 730 42	○ Soft Alu - 1 module
10	5 720 31	○ White - 2 modules
5	5 725 31	● Magnesium - 2 modules
5	5 730 45	○ Champagne - 2 modules
5	5 730 44	○ Soft Alu - 2 modules
2-way push-button with locator		
Equipped with blue LED		
10	5 720 02	○ White - 1 module
10	5 725 02	● Magnesium - 1 module
10	5 730 47	○ Champagne - 1 module
10	5 730 46	○ Soft Alu - 1 module
10	5 720 32	○ White - 2 modules
5	5 725 32	● Magnesium - 2 modules
5	5 730 49	○ Champagne - 2 modules
5	5 730 48	○ Soft Alu - 2 modules
2-way push-button with label-holder		
10	5 720 03	○ White - 1 module
5	5 725 03	● Magnesium - 1 module
10	5 720 33	○ White - 2 modules
10	5 725 33	● Magnesium - 2 modules
10	5 700 33	○ Champagne - 2 modules
10	5 710 33	○ Soft Alu - 2 modules

Pack	Cat.Nos	Push-buttons 6 A - 250 V~
1-way push-button		
10	5 730 00	○ White - 1 left module
10	5 731 00	● Magnesium - 1 left module
10	5 730 54	○ Soft Alu - 1 left module
10	5 730 01	○ White - 1 middle module
10	5 731 01	● Magnesium - 1 middle module
10	5 730 55	○ Soft Alu - 1 middle module
10	5 730 02	○ White - 1 right module
10	5 731 02	● Magnesium - 1 right module
10	5 730 56	○ Soft Alu - 1 right module
10	5 730 50	○ White - 2 modules
10	5 731 50	● Magnesium - 2 modules
10	5 730 57	○ Soft Alu - 2 modules
1-way push-button with bell symbol		
5	5 730 80	○ White - 2 modules
5	5 731 80	● Magnesium - 2 modules
5	5 730 58	○ Soft Alu - 2 modules
2-way push-button		
5	5 730 51	○ White - 2 modules
5	5 731 51	● Magnesium - 2 modules
5	5 730 59	○ Soft Alu - 2 modules
2-way push-button with locator		
Equipped with blue LED		
5	5 730 52	○ White - 2 modules
5	5 731 52	● Magnesium - 2 modules
10	5 730 53	○ White - 2 modules
5	5 731 53	● Magnesium - 2 modules



5 743 37



5 743 20



5 740 09A



5 740 47A

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Product Description	Pack	Cat.Nos	Product Description
1	5 743 34 5 743 37 5 743 36 5 743 35	<p>Contactless switch for lighting</p> <p>2 modules</p> <p>Allows to control light sources by simply passing the hand in front of the switch</p> <p>Detection distance 6 cm</p> <p>LED indicator light, activated by default (can be switched off)</p> <p>Mechanism depth 20 mm, compatible with all types of flush-mounting boxes</p> <p>2 possibilities of cabling:</p> <ul style="list-style-type: none"> With neutral, 3 wires Accepted power by lamp type: <ul style="list-style-type: none"> - LEDs and CFL lamps: 200 W LED - Incandescent and halogen lamps: 200 W - LEDs, CFLs, halogen lamps, fluorescent tubes with ferromagnetic or electronic transformer: 200 VA Without neutral, 2 wires <p>Accepted power by lamp type:</p> <ul style="list-style-type: none"> - LEDs and CFL lamps: 5 to 200 W LED - Incandescent and halogen lamps: 5 to 200 W - LEDs, CFLs, halogen lamps, fluorescent tubes with ferromagnetic or electronic transformer: 5 to 200 VA <p>• 4 modes available:</p> <ul style="list-style-type: none"> - 1-way switch mode: wiring with or without neutral - 2-way switch mode: wiring with neutral mandatory - Master/Slave mode: wiring with neutral mandatory, 3 slaves max. - Push-button mode: wiring with neutral mandatory, for controlling relays or a «with Netatmo» micromodule <p>○ White ● Magnesium ○ Champagne ○ Soft Alu</p>	1	5 740 09A 5 740 59A	<p>Motion sensors</p> <p>Compatible with any type of lamp</p> <p>IR detection, detection field 170°</p> <p>Detection range 8 m</p> <p>Time delay setting from 5 s to 30 min</p> <p>Light level threshold setting from 5 to 1275 lux</p> <p>4 levels of sensitivity setting</p> <p>Installation in box min. depth 30 mm</p> <p>2 modules</p> <p>Motion sensor, 2 wires, without neutral</p> <p>Standby consumption: < 0.01 W</p> <p>Accepted power by lamp type:</p> <ul style="list-style-type: none"> - LEDs and CFL lamps: 2 to 100 W LED - Halogen and incandescent: 2 to 150 W - LEDs, CFLs, halogen, fluorescent tube with ferromagnetic or electronic transformer : 2 to 150 VA <p>If several sensors are installed on the same circuit, the minimum load changes: refer to the technical sheet</p> <p>Possibility to install up to 3 sensors in parallel</p> <p>Additional remote manual control possible with push-button, 10 max.</p> <p>Can be associated with a modular time-lag switch</p> <p>Cat.Nos 4 126 02 or 0 047 04 (p. 106)</p> <p>Accepted power by lamp type will be power of the time-lag switch used</p> <p>○ White ● Magnesium</p>
1	5 743 20	<p>Contactless switch for doors, electric and electromagnetic door locks</p> <p>2 modules</p> <p>Allows to control door opening by simply passing the hand in front of the switch</p> <p>Detection distance adjustable from 10 cm (default setting) to 30 cm</p> <p>LED indicator light, activated by default (can be switched off)</p> <p>Mechanism depth 25 mm, compatible with all types of flush-mounting boxes</p> <p>Power supply 12 - 24 - 48 V_{dc}</p> <p>Available modes :</p> <ul style="list-style-type: none"> Steady mode/pulse mode (by default mode) - NC/NO mode (by default mode) <p>○ White</p>	1	5 740 47A 5 740 97A 5 741 41A 5 741 40A	<p>○ White ● Magnesium ○ Champagne ○ Soft Alu</p> <p>Motion sensor, 3 wires, with neutral</p> <p>Standby consumption: < 0.015 W</p> <p>Accepted power by lamp type:</p> <ul style="list-style-type: none"> - LEDs and CFL lamps: 0 to 500 W LED - Halogen and incandescent: 0 to 2000 W - LEDs, CFLs, halogen, fluorescent tube with ferromagnetic or electronic transformer: 0 to 1000 VA <p>Possibility to install up to 10 sensors in parallel</p> <p>Additional remote manual control possible with push-button, 10 max.</p> <p>Master/Slave function available (10 slaves max. for 1 master)</p> <p>○ White ● Magnesium ○ Champagne ○ Soft Alu</p>
1	0 401 49	<p>Active power bleeder</p> <p>Makes 2-wire electronic lighting control units without neutral compatible with all commercially-available loads (LED, compact fluorescent, ELV halogen with ferromagnetic or electronic ballast, 230 V halogen, fluorescent tube, incandescent)</p> <p>Consumption 0.4 W</p>			

Support frames and plates,
p. 45 and 54 to 63


Red catalogue numbers: New products

Arteor™

dimmers



5 727 13



5 735 01



5 722 39A


Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Leading edge dimmers
1	5 722 13 5 727 13 5 700 53 5 710 53	Without neutral, 2-wire 2 modules Rotary dimmer - 400 W ○ White ● Magnesium ■ Champagne □ Soft Alu
1	5 735 01 5 737 01	Rotary dimmer - 1000 W To be installed alone in a 3 module box (or 1-gang BS) with a 3-module support frame and a 2-module plate For lamps: - 60-1000 W (230 V) - 60-500 W (127 V) for incandescent and halogen lamps - 60-600 VA (230 V) - 60-300 VA (127 V) for halogen lamps with electronic transformer with leading edge behaviour - 60-1000 VA (230 V) - 60-500 VA (127 V) for halogen lamps with ferromagnetic transformers ○ White ● Magnesium
1	5 722 39A 5 727 39A 5 729 37A 5 729 36A	Dimmers for all dimmable loads Can be associated with one or several push-buttons without neon, for ON/OFF or dimming control Memory level function: lights come on again at the same lighting level as before they were last switched OFF Depth 35 mm Standby consumption < 5 mW 2 modules Push-button dimmer without neutral, 2 wires For ON/OFF and dimming control of all types of lamps: - Dimmable LEDs and CFL lamps: 3 to 125 W LED (10 lamps max.) - Halogen and incandescent 230 V~ : 3 to 125 W - LEDs CFLs, halogen lamps, fluorescent tubes with ferromagnetic or electronic transformer: 3 to 125 VA ○ White ● Magnesium ■ Champagne □ Soft Alu
1	5 741 89A 5 741 90A 5 741 91A 5 741 88A	Push-button dimmer with neutral, 3 wires For ON/OFF and dimming control of all types of lamps: - Dimmable LEDs and CFL lamps: 0 to 150 W LED (15 lamps max.) - Halogen and incandescent 230 V~ : 0 to 150 W - LEDs, CFLs, halogen lamps, fluorescent tubes with ferromagnetic or electronic transformer: 0 to 150 VA ○ White ● Magnesium ■ Champagne □ Soft Alu
1	5 722 38 5 727 38 5 729 39 5 729 38	Dimmers 1-10 V Push-button dimmer for ballasts 1-10 V 2 modules ○ White ● Magnesium ■ Champagne □ Soft Alu

NEW DIMMERS & MOTION SENSORS

LED there be light

Fully LED compatible,
this new generation of
Arteor dimmers and
motion sensors is not
only designed to work
with any type of LED.
They are suitable for all
modern loads.

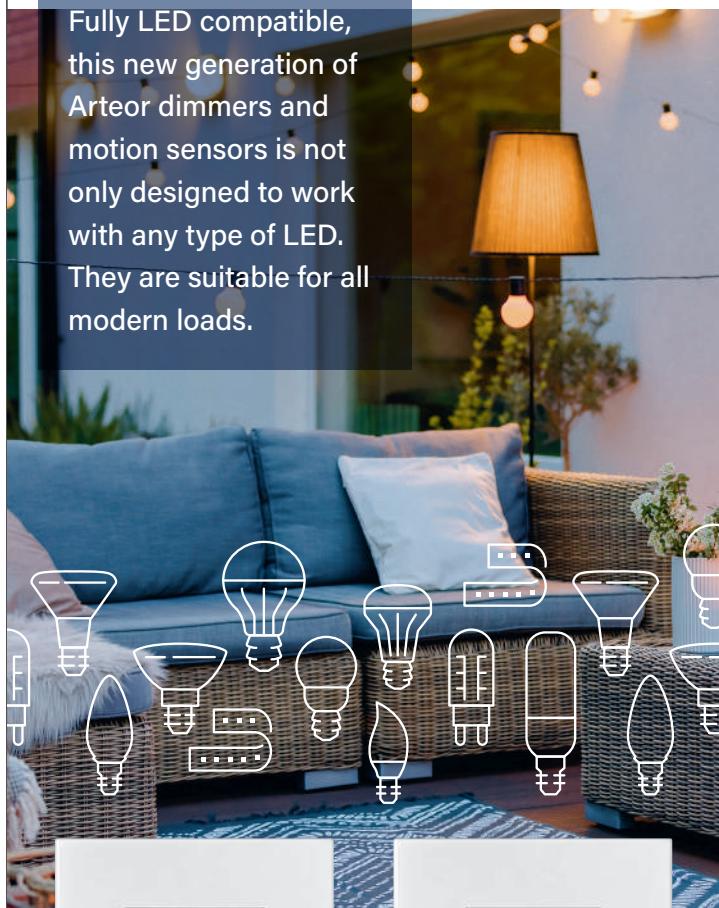

Dimmers for all dimmable loads

- Available with or without neutral
- Compatible with all types of LEDs
- Suitable for all kinds of dimmable LEDs and modern loads
- Reduced depth 25 mm for easy installation

Motion sensors

- Available with or without neutral
- Compatible with all types of LEDs
- Suitable for all kinds of dimmable LEDs and modern loads
- Reduced depth 25 mm for easy installation

Arteor™ load selection charts

Load selection charts

	Cat.Nos	Type of cabling	Universal					
			LEDs and CFLs		Halogen/Incandescent lamps		LEDs, CFLs, halogen, fluorescent tube with ferromagnetic or electronic transformer	
			110 V~	240 V~	110 V~	240 V~	110 V~	240 V~
Contactless switch for lighting	5 743 34	With Neutral	100 VA	200 VA	100 W	200 W	100 VA	200 VA
		Without Neutral	5 - 100 VA	5 - 200 VA	5 - 100 W	5 - 200 W	5 - 100 VA	5 - 200 VA
	5 743 37	With Neutral	100 VA	200 VA	100 W	200 W	100 VA	200 VA
		Without Neutral	5 - 100 VA	5 - 200 VA	5 - 100 W	5 - 200 W	5 - 100 VA	5 - 200 VA
	5 743 36	With Neutral	100 VA	200 VA	100 W	200 W	100 VA	200 VA
		Without Neutral	5 - 100 VA	5 - 200 VA	5 - 100 W	5 - 200 W	5 - 100 VA	5 - 200 VA
	5 743 35	With Neutral	100 VA	200 VA	100 W	200 W	100 VA	200 VA
		Without Neutral	5 - 100 VA	5 - 200 VA	5 - 100 W	5 - 200 W	5 - 100 VA	5 - 200 VA
Motion sensors	5 740 09A 5 740 59A	110 V~	230 V~	110 V~	230 V~	110 V~	230 V~	
		2 - 50 VA	2 - 100 VA	2 - 50 W	2 - 150 W	2 - 75 VA	2 - 150 VA	
	5 740 47A 5 740 97A 5 741 41A 5 741 40A	With Neutral	0 - 250 VA	0 - 500 VA	0 - 1000 W	0 - 2000 W	0 - 500 VA	0 - 1000 VA
		110 V~	230 V~	110 V~	230 V~	110 V~	230 V~	
		0 - 250 VA	0 - 500 VA	0 - 1000 W	0 - 2000 W	0 - 500 VA	0 - 1000 VA	
		110 V~	230 V~	110 V~	230 V~	110 V~	230 V~	
		110 V~	230 V~	110 V~	230 V~	110 V~	230 V~	
Dimmers for all dimmable loads	5 722 39A 5 727 39A 5 729 37A 5 729 36A	110 V~	230 V~	110 V~	230 V~	110 V~	230 V~	
		3 - 75 VA	3 - 125 VA	3 - 75 W	3 - 125 W	3 - 75 VA	3 - 125 VA	
		3 - 75 VA	3 - 125 VA	3 - 75 W	3 - 125 W	3 - 75 VA	3 - 125 VA	
		3 - 75 VA	3 - 125 VA	3 - 75 W	3 - 125 W	3 - 75 VA	3 - 125 VA	
	5 741 89A 5 741 90A 5 741 91A 5 741 88A	0 - 75 VA	0 - 150 VA	0 - 75 W	0 - 150 W	0 - 75 VA	0 - 150 VA	
		0 - 75 VA	0 - 150 VA	0 - 75 W	0 - 150 W	0 - 75 VA	0 - 150 VA	
		0 - 75 VA	0 - 150 VA	0 - 75 W	0 - 150 W	0 - 75 VA	0 - 150 VA	
		0 - 75 VA	0 - 150 VA	0 - 75 W	0 - 150 W	0 - 75 VA	0 - 150 VA	
Rotary dimmers	5 722 13 5 727 13 5 700 53 5 710 53	110 V~	240 V~	110 V~	240 V~	110 V~	240 V~	
		20 - 200 W	40 - 400 W	20 - 200 VA	40 - 400 VA	-	-	
	5 735 01 5 737 01	60 - 500 W	60 - 1000 W	60 - 500 VA	60 - 1000 VA	60 - 300 VA	60 - 600 VA	
		60 - 500 W	60 - 1000 W	60 - 500 VA	60 - 1000 VA	60 - 300 VA	60 - 600 VA	
	5 722 38 5 727 38 5 729 39 5 729 38	-	-	-	-	20 - 300 VA	20 - 600 VA	
		-	-	-	-	20 - 300 VA	20 - 600 VA	
		-	-	-	-	20 - 300 VA	20 - 600 VA	
		-	-	-	-	20 - 300 VA	20 - 600 VA	

Arteor™

visual indication



5 722 21



5 727 26



5 724 52



5 722 67



Lamp used as a torch



5 727 57 + plate 5 713 02

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Skirting lights	Pack	Cat.Nos	Reading lights
1	5 722 21 5 740 82 5 740 83 5 740 80	Standard For installation close to obstacles 2 modules With LED 230 V~ - 0.2 or 1 W <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu With motion detector 100-240 V~ With IR detection cell and LED When a person passes, the mechanism detects the presence and lights the obstacle The function is equipped with an audible signal that can be disengaged <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu	1	5 722 57 5 727 57	Reading lights Fitted with maintenance-free LEDs LED colours: 3000 K (neutral white) 230 V~ power supply - energy class A Screw terminals For installation in the bedhead Offers directional lighting Equipped with a flexible cable so the head can swivel Built-in dimmer Consumption 3.3 W Luminous flux 110 lumen (equivalent to 15 W incandescent) Service life 40000 hours For installation in box depth 40 mm min. 2 modules <input type="radio"/> White <input checked="" type="radio"/> Magnesium
1	5 722 67	Self-contained plug-in lights 230 V~ power supply In the event of a mains failure, the lamp lights up automatically When removed from its socket, the lamp lights up automatically and can be used as a torch (with O/I button) Lamp can be removed simply by pushing Standby power: 24 hrs in use <input type="radio"/> Transparent			
10	5 724 52	Illuminated lighting unit 230 V~ - 1 W Supplied with 4 coloured labels 1 module <input type="radio"/> White			
10	5 724 53 5 722 23	Overdoor lighting units Supplied with diffusers and LED 2 modules <input type="radio"/> White with red diffuser <input type="radio"/> White with white diffuser			
10	5 724 56	Lamps For locator switch LED 230 V - blue 			
10	5 724 55 5 724 57 5 724 54	For indicator switch LED 230 V - red LED 24 V - red LED 12 V - red 			



Support frames
and plates,
p. 45 and 54 to 63





Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Thermostats	Pack	Cat.Nos	Fan controllers
		Electronic room thermostat Control knob with index and adjustable segments for min. and max. settings Adjustable range from 5 °C to 30 °C (+/- 0.5 °C) Power supply: 230 V~ - 50/60 Hz One potential free changeover contact output Suitable for controlling heated ceilings and underfloor heating - LV use breaking capacity: 8 A - 250 V~ - resistive inductive circuit 2 A - 250 V~ - inductive circuit - ELV use breaking capacity: 12 to 48 V~ - 12 to 24 V~, from 1 mA min. to 500 mA max. 2 modules	1	5 722 17	2 modules
1	5 722 03	<input type="radio"/> White	1	5 727 17	<input type="radio"/> White
1	5 727 03	<input checked="" type="radio"/> Magnesium	1	5 727 87	<input type="radio"/> Magnesium
1	5 727 06	<input type="radio"/> Champagne	1	5 727 86	<input type="radio"/> Champagne
1	5 727 05	<input type="radio"/> Soft Alu			<input type="radio"/> Soft Alu
		Thermostat for electric floor heating With one potential free N/O contact and LED 16 A - 230 V~ Adjustable range from 7 °C to 40 °C 2 modules	1	5 722 18	AC speed control - 4 positions Operates 40 to 400 VA limit switch For progressive speed control of ceiling fan
1	5 722 63	<input type="radio"/> White	1	5 727 18	<input type="radio"/> White
1	5 727 63	<input checked="" type="radio"/> Magnesium	1	5 727 97	<input type="radio"/> Magnesium
1	5 727 08	<input type="radio"/> Champagne	1	5 727 96	<input type="radio"/> Champagne
1	5 727 07	<input type="radio"/> Soft Alu	5	5 722 15	<input type="radio"/> Soft Alu
			5	5 727 15	<input type="radio"/> Soft Alu
			5	5 727 99	<input type="radio"/> Soft Alu
			5	5 727 98	<input type="radio"/> Soft Alu
					Rotary speed controller for fan Operates 40 to 400 VA limit switch For progressive speed control of ceiling fan
			5	5 722 02	<input type="radio"/> White
			5	5 727 02	<input type="radio"/> Magnesium
			5	5 700 52	<input type="radio"/> Champagne
			5	5 710 52	<input type="radio"/> Soft Alu
					Fan step regulator - 100 W
			5	5 722 01	<input type="radio"/> White
			5	5 727 01	<input checked="" type="radio"/> Magnesium
			5	5 727 55	<input type="radio"/> Champagne
			5	5 727 54	<input type="radio"/> Soft Alu
					Curtain switches
			1		1 module
					Curtain switch centre off
			5	5 722 02	<input type="radio"/> White
			5	5 727 02	<input checked="" type="radio"/> Magnesium
			5	5 700 52	<input type="radio"/> Champagne
			5	5 710 52	<input type="radio"/> Soft Alu
					Curtain switch centre retract
			5	5 722 01	<input type="radio"/> White
			5	5 727 01	<input checked="" type="radio"/> Magnesium
			5	5 727 55	<input type="radio"/> Champagne
			5	5 727 54	<input type="radio"/> Soft Alu
					Electric roller blind controllers - 250 V~
					For control via automatic box (N/O mechanism)
			10	5 722 19	Double push-button - 10 A
			10	5 727 19	2 modules
			10	5 729 43	<input type="radio"/> White
			10	5 729 42	<input checked="" type="radio"/> Magnesium
					<input type="radio"/> Champagne
					<input type="radio"/> Soft Alu
					For direct control of a motor (mechanism with fixed positions)
			10	5 722 20	Double push-button - 10 A
			10	5 727 20	2 modules
			10	5 700 54	<input type="radio"/> White
			10	5 710 54	<input checked="" type="radio"/> Magnesium
					<input type="radio"/> Champagne
					<input type="radio"/> Soft Alu

Support frames and plates,
p. 45 and 54 to 63



Arteor™

RCBO and MCB



5 723 60



5 723 61

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	RCBO - 16 A - 230 V~
1	5 723 60	Single pole + Neutral - 30 mA - 2 modules The RCBO is used to protect people (premises with a conductive floor, presence of water, etc...) against direct contact with live parts or leakages to earth With test button ○ White


Pack	Cat.Nos	Thermal magnetic proximity MCB
1	5 723 61	Single pole + Neutral - 230 V~ - 16 A Used for local protection of part in a circuit (e.g. 2P+E socket) against overloads and short-circuits Main protection being close to the user plus discriminating allows immediate reset Can also be used as a local consumption limiter (depending on its rating) Breaking capacity: 3000 A - 2 modules ○ White

Arteor™

proximity MCBs

Example of use of an RCBO

For use in addition to a DIN rail mounting RCBO
In the event of a fault, allows the user to reset the RCBO locally (on the work surface), without interrupting service to another group of sockets
• 30 mA sensitivity ensures the safety of persons

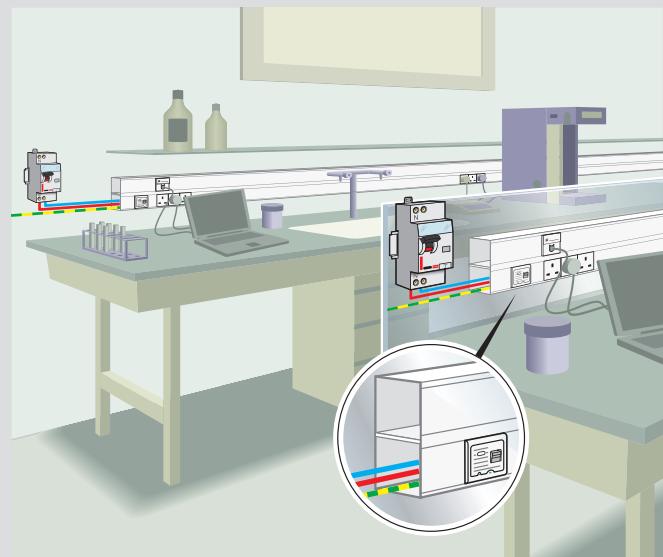

Selectivity

RCBOs or upstream MCBs		DX³ 6000 - 10 kA						
		DX³ 10000 - 16 kA / 1P, 2P, 3P, 4P curve C						
Downstream MCBs		16 A	20 A	25 A	32 A	40 A	50 A	63 A
Arteor 1P+N MCB and RCBO	10 A	120	150	187	240	300	375	472
Arteor 1P+N MCB and RCBO	16 A	-	150	187	240	300	375	472

RCBOs or upstream MCBs		DX³ 10000 - 16 kA (80 to 125 A), DX³ 25 kA, 36 kA, 50 kA curve C									
		16 A	20 A	25 A	32 A	40 A	50 A	63 A	80 A	100 A	125 A
Downstream MCBs	10 A	120	150	210	500	700	1000	1800	3000	5000	T
Arteor 1P+N MCB and RCBO	16 A		150	187	300	500	700	1300	2000	3600	5500



5 716 80



5 716 85



5 716 90



5 716 93



5 716 99



5 754 81

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)



Pack	Cat.Nos	USB Type-A chargers	Pack	Cat.Nos	USB Type-C chargers (continued)
		Consumption in passive mode < 0.1 W For charging of smartphones, tablets and powerbanks			For charging of up to two portable devices (smartphones, tablets, powerbanks)
10	5 716 80	Single USB sockets - 1 x Type-A - 5 V⎓ - 3 A - 15 W 1 module - compact format for space gain <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu	1	5 720 72	Double USB sockets - 2 x Type-C - 5 V⎓ - 3 A - 15 W Consumption in passive mode < 0.07 W 2 modules <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
10	5 716 81		1	5 725 72	
10	5 716 82		1	5 710 78	
10	5 716 83		1	5 700 78	
10	5 716 84	Double USB sockets - 2 x Type-A - 5 V⎓ - 3 A - 15 W For charging up to two portable devices 1 module - compact format for space gain <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu			USB Type-C chargers - Fast charge
10	5 716 85				Fast charge feature: Power Delivery
10	5 716 86				Single USB sockets - 1 x Type-C 20 W
10	5 716 87				For fast charging of smartphones, tablets, powerbanks
5	5 720 78	Double USB sockets - 2 x Type-A - 5 V⎓ - 3 A - 15 W 2 modules <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu	10	5 716 96	Consumption in passive mode < 0.05 W 1 module - compact format for space gain <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
1	5 725 78		10	5 716 97	
1	5 710 76		10	5 716 98	
1	5 700 76		10	5 716 99	
		USB Type-A + USB Type-C chargers For charging of up to two portable devices (smartphones, tablets, powerbanks)			Double USB sockets - 2 x Type-C 30 W
		Double USB sockets - Type-A + Type-C - 5 V⎓ - 3 A - 15 W Consumption in passive mode < 0.1 W 1 module - compact format for space gain <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu	1	5 734 81	For charging of laptops, smartphones, tablets, powerbanks Consumption in passive mode < 0.1 W 2 modules <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
10	5 716 88		1	5 734 82	
10	5 716 89		1	5 734 83	
10	5 716 90		1	5 734 84	
10	5 716 91				Single USB sockets - 1 x Type-C 45 W
		Double USB sockets - Type-A + Type-C - 5 V⎓ - 3 A - 15 W Consumption in passive mode < 0.07 W 2 modules <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu	1	5 754 81	For charging of laptops, smartphones, tablets, powerbanks Consumption in passive mode < 0.1 W 2 modules <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
1	5 720 77		1	5 754 82	
1	5 725 77		1	5 754 83	
1	5 710 77		1	5 754 84	
1	5 700 77				Double USB sockets - 2 x Type-C 63 W
		USB Type-C chargers For charging of up to two portable devices (smartphones, tablets, powerbanks)	1	5 754 90	For charging of laptops, smartphones, tablets, powerbanks Consumption in passive mode < 0.1 W Automatic terminals 3 modules <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
		Double USB sockets - 2 x Type-C - 5 V⎓ - 3 A - 15 W Consumption in passive mode < 0.1 W 1 module - compact format for space gain <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu	1	5 754 91	
10	5 716 92		1	5 754 92	
10	5 716 93		1	5 754 93	
10	5 716 94				
10	5 716 95				


Support frames
and plates,
p. 45 and 54 to 63


Red catalogue numbers: New products

What is USB Type-C ?

The USB Type-C connector is the new standard adopted by mobile terminals for charging and data. It is compatible with all major brands of portable devices (Apple, Samsung, LG, Huawei, Google, Sony, etc.)

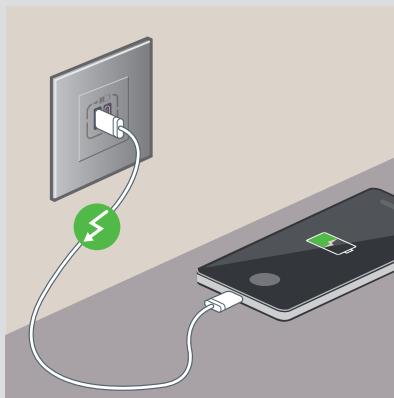


Why USB Type-C ?

- To charge faster than with the USB Type-A connector
- To reduce charging time in Power Delivery mode (booster)
- To make life easier for users with a single reversible cord
- To accompany the change of all multimedia terminals (laptops, tablets, phones)

How to charge all your terminals faster ?

When using a USB Type-C Power Delivery wall charger, the terminal (e.g. smartphone) queries the charger and selects the most suitable voltage for its battery in order to optimize charging time while ensuring the safety of both user and battery

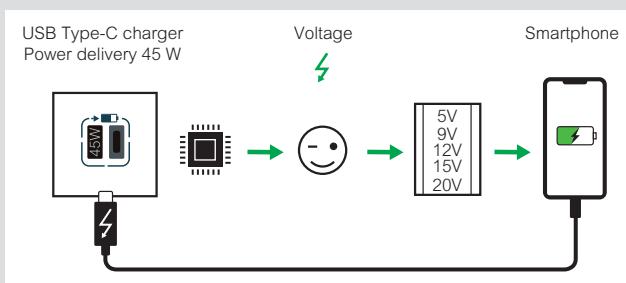

For charging while travelling

Provides extra energy in passage/transit areas



Waiting area (train station, airport, bar, restaurant...)

With a Power Delivery charger

- 50% charge reached in less than 30 minutes
- 80% charge reached in 1 hour
- 50% time saving compared to a 5 W charger

Recommendations:

- Faster charging in OFF mode
- Faster charging in ON mode: decrease brightness <50%

Wall-mounted USB chargers help to reduce e-waste

Remember that 50 million tons of electronic waste are produced each year in Europe, whereas the aim is carbon neutrality

Wall-mounted USB chargers can be shared and are never forgotten (examples: hotels, holidays, office)

New smartphones (Apple, Samsung) are now delivered without mobile charger and are USB Type-C Power Delivery compatible

USB Type-C standardization drastically limits the diversity of cords required between multimedia terminals for the exchange of data and for charging

For charging in working places

Facilitates access to charge points
Saves the user having to carry his mobile charger along
Allows having more connection points available



Office or meeting rooms

Arteor™

lighting control, emergency push-buttons



5 720 55




5 723 63

Arteor™

double pole switches, cooker control unit



5 720 87

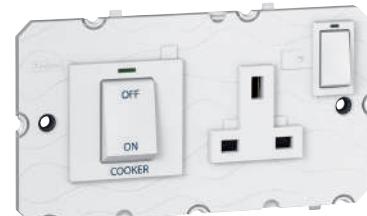

5 720 88

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Time delay switches	Double pole switches 40 A - 250 V~
		<p>Interference suppression conforming to standard EN 55022 For timer control of a circuit with the following loads: - 1000 W incandescent and halogen 230 V~ - 2300 W resistive (heating) - 400 VA fluorescent and ELV halogen Adjustable from 25 s to 15 min It is possible to install a number of timer switches in parallel on the same circuit With integrated LED 2-wire installation in box min. depth 40 mm 2 modules</p> <p>1 5 720 55 White 1 5 740 84 Magnesium 1 5 741 38 Champagne 1 5 741 37 Soft Alu</p>	<p>Conform to EN 60669-1: 2000 and SANS 164-1 Captive terminal screws For flush-mounting box to be min. 48 mm deep Use US plate 4" x 4" - 2 modules</p> <p>Double pole switch White Magnesium Champagne Soft Alu</p>
		<p>Single pole latching relays 10 A - 250 V~ Used to bring functions with low breaking capacity close to the application - Resistive: 3000 W - Incandescent: 1800 W - LV halogen: 1800 W - Fluorescent: 400 VA - Motors (roller blind type): 530 W 2 modules</p> <p>1 5 722 27 White 1 5 727 27 Magnesium 1 5 729 47 Champagne 1 5 729 46 Soft Alu</p>	<p>5 5 720 82 White 5 725 82 Magnesium 5 721 97 Champagne 5 721 96 Soft Alu</p>
		<p>Emergency stop mushroom head push-buttons 10 A - 250 V~ N/O + N/C 2 modules</p> <p>With key Unlock with RONIS key no. 601</p> <p>1 5 723 63 Yellow/red</p> <p>1/4 turn 1/4 turn unlocking</p> <p>1 5 723 62 Yellow/red</p>	<p>5 5 720 80 White 5 725 80 Magnesium 5 724 92 Champagne 5 724 85 Soft Alu</p>
			<p>Double pole switch + neon - 1-gang Use BS plate 2 modules</p> <p>5 5 720 87 White 5 725 87 Magnesium 5 721 99 Champagne 5 721 98 Soft Alu</p>
			<p>Cooker control unit 250 V~ Conform to BS 4177: 1992 45 A double pole switch + 13 A double pole switched socket outlet Use special plate Cat.No 5 751 50</p> <p>5 5 720 88 White</p>

Support frames and plates, p. 45 and 54 to 63



Arteor™


British standard socket outlets



5 721 43



5 710 48

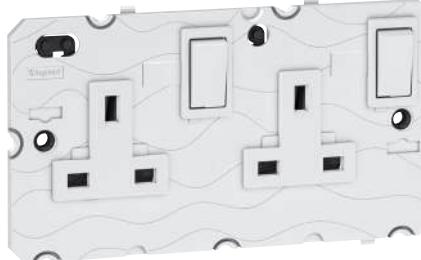

5 721 49



5 726 50

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Single pole socket outlets 13 A - 250 V~	Pack	Cat.Nos	Double pole socket outlets 5 A - 250 V~
		Shuttered for child safety ASTA licence Conform to BS 1363 Part 2 Use special plates			Shuttered for child safety Conform to BS 546 Use special plates
10	5 721 43	2P+E switched - 1-gang 	10	5 721 40	2P+E switched - 1-gang
10	5 726 43	○ White ● Magnesium ○ Champagne ○ Soft Alu	10	5 726 40	○ White ● Magnesium ○ Champagne ○ Soft Alu
10	5 700 48		10	5 727 58	
10	5 710 48		10	5 727 21	
10	5 721 44	2P+E switched + neon - 1-gang 			Fused connection units
10	5 726 44	○ White ● Magnesium ○ Champagne ○ Soft Alu			Double pole fused 13 A (fuse supplied) Flex outlet knockout and cord grip Captive fuse carrier (padlockable) Captive terminal screws Conform to BS 1363: part 4 Use special plates
10	5 724 45		5	5 721 50	Switched
10	5 724 44		5	5 726 50	○ White ● Magnesium ○ Champagne ○ Soft Alu
5	5 721 45	2P+E switched - 2-gang 	5	5 726 75	Switched + neon
5	5 726 45	○ White ● Magnesium ○ Champagne ○ Soft Alu	5	5 726 74	○ White ● Magnesium ○ Champagne ○ Soft Alu
5	5 700 49		5	5 721 51	Unswitched
5	5 710 49		5	5 726 51	○ White ● Magnesium ○ Champagne ○ Soft Alu
5	5 721 46	2P+E switched + neon - 2-gang 	5	5 726 77	
5	5 726 46	○ White ● Magnesium ○ Champagne ○ Soft Alu	5	5 726 76	
5	5 724 47		10	5 721 57	
5	5 724 46		10	5 726 57	
			10	5 726 79	
			10	5 726 78	
		Double pole socket outlets 13 A - 250 V~			
		Shuttered for child safety ASTA licence Conform to BS 1363 Part 2 Use special plates			
5	5 721 47	2P+E switched - 1-gang 			
5	5 726 47	○ White ● Magnesium ○ Champagne ○ Soft Alu			
5	5 724 49				
5	5 724 48				
5	5 721 49	2P+E switched - 2-gang 			
5	5 726 49	○ White ● Magnesium ○ Champagne ○ Soft Alu			
5	5 710 70				
5	5 700 70				
5	5 721 41	● Red for standard and clean earth applications Non standard pin configuration			




5 721 56A + plate 5 751 11A



5 726 29A + plate 5 754 58



5 726 58A

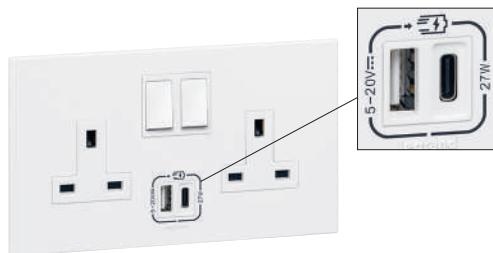

5 722 86 + plate 5 754 37

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	British standard socket outlets 13 A - 250 V~ with USB charger
		Conform to BS 1363-2
1	5 721 56A	1-gang single pole switched USB Type-A 3 A - 5 V~ - 15 W
1	5 726 56A	Consumption in passive mode < 0.07 W
1	5 710 80A	○ White ● Magnesium ○ Champagne ○ Soft Alu
1	5 700 80A	1-gang single pole switched USB Type-C 18 W
1	5 721 29A	Fast charge feature: USB Type-C Power Delivery
1	5 726 29A	Consumption in passive mode < 0.07 W
1	5 722 29A	○ White ● Magnesium ○ Champagne ○ Soft Alu
1	5 722 49A	1-gang single pole unswitched USB Type-A 3 A - 5 V~ - 15 W
1	5 721 58A	Consumption in passive mode < 0.07 W
1	5 726 58A	○ White ● Magnesium ○ Champagne ○ Soft Alu
1	5 710 82A	1-gang single pole unswitched USB Type-C 18 W
1	5 700 82A	Fast charge feature: USB Type-C Power Delivery
1	5 721 27A	Consumption in passive mode < 0.07 W
1	5 726 27A	○ White ● Magnesium ○ Champagne ○ Soft Alu
1	5 722 28A	2-gang single pole switched USB Type-A + Type-C 3 A - 5 V~ - 15 W
1	5 722 58A	Consumption in passive mode < 0.07 W
1	5 721 42	○ White ● Magnesium ○ Champagne ○ Soft Alu
1	5 726 42	
1	5 710 81	
1	5 700 81	2-gang single pole switched USB Type-A + Type-C 27 W
1	5 722 86	Fast charge feature: USB Type-C Power Delivery
1	5 728 07	Consumption in passive mode < 0.07 W
1	5 700 85	○ White ● Magnesium ○ Champagne ○ Soft Alu
1	5 710 68	

Pack	Cat.Nos	Plates for British standard socket outlets - 13 A - 250 V~ with USB charger
5	5 751 11A	For 1-gang single pole switched USB Type-A 3 A - 5 V~ - 15 W
5	5 751 34A	○ White ○ Soft Alu ● Graphite ● Magnesium ○ Champagne ● Dark Bronze ○ Brushed Metal - Stainless Steel
5	5 751 33A	
5	5 751 35A	For 1-gang single pole switched USB Type-C 18 W
5	5 751 36A	○ White ○ Soft Alu ● Graphite ● Magnesium ○ Champagne ● Dark Bronze ○ Brushed Metal - Stainless Steel
5	5 751 37A	
1	5 751 12A	
5	5 754 52	For 1-gang single pole unswitched USB Type-A 3 A - 5 V~ - 15 W
5	5 754 53	○ White ○ Soft Alu ● Graphite ● Magnesium ○ Champagne ● Dark Bronze ○ Brushed Metal - Stainless Steel
5	5 754 54	
5	5 754 55	For 1-gang single pole unswitched USB Type-C 18 W
5	5 754 56	○ White ○ Soft Alu ● Graphite ● Magnesium ○ Champagne ● Dark Bronze ○ Brushed Metal - Stainless Steel
5	5 754 57	
1	5 754 58	
5	5 751 13A	For 1-gang single pole unswitched USB Type-A 3 A - 5 V~ - 15 W
5	5 751 89A	○ White ○ Soft Alu ● Graphite ● Magnesium ○ Champagne ● Dark Bronze ○ Brushed Metal - Stainless Steel
5	5 751 88A	
5	5 751 93A	For 1-gang single pole unswitched USB Type-C 18 W
5	5 751 94A	○ White ○ Soft Alu ● Graphite ● Magnesium ○ Champagne ● Dark Bronze ○ Brushed Metal - Stainless Steel
5	5 751 95A	
1	5 751 14A	
5	5 754 59	For 1-gang single pole unswitched USB Type-A 3 A - 5 V~ - 15 W
5	5 754 61	○ White ○ Soft Alu ● Graphite ● Magnesium ○ Champagne ● Dark Bronze ○ Brushed Metal - Stainless Steel
5	5 754 62	
5	5 754 63	For 1-gang single pole unswitched USB Type-C 18 W
5	5 754 64	○ White ○ Soft Alu ● Graphite ● Magnesium ○ Champagne ● Dark Bronze ○ Brushed Metal - Stainless Steel
5	5 754 65	
1	5 754 66	
5	5 751 17	For 2-gang single pole switched USB Type-A + Type-C 3 A - 5 V~ - 15 W
5	5 751 52	○ White ○ Soft Alu ● Graphite ● Magnesium ○ Champagne ● Dark Bronze ○ Brushed Metal - Stainless Steel
5	5 751 51	
5	5 751 53	For 2-gang single pole switched USB Type-A + Type-C 27 W
5	5 751 54	○ White ○ Soft Alu ● Graphite ● Magnesium ○ Champagne ● Dark Bronze ○ Brushed Metal - Stainless Steel
5	5 751 55	
1	5 751 18	
5	5 754 37	
5	5 754 39	
5	5 754 40	
5	5 754 41	
5	5 754 42	
5	5 754 43	
1	5 754 38	

**Support frames
and plates,
p. 45 and 54 to 63**



Red catalogue numbers: New products



5 721 38A + plate 5 751 10A



5 721 39 + plate 5 751 70



5 726 62A + plate 5 754 71



5 710 94 + plate 5 754 46

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Multistandard switched socket outlets 16 A - 250 V~ / 15 A - 127 V~ with USB charger	Pack	Cat.Nos	Special plates for Arteor multistandard socket outlets with USB charger
		Shuttered for child safety			
1	5 721 38A	2P+E - 1-gang USB Type-A 3 A - 5 V~ - 15 W Consumption in passive mode < 0.07 W	5	5 751 10A	For 1-gang switched socket outlet USB Type-A 3 A - 5 V~ - 15 W
1	5 726 38A	○ White	5	5 751 44A	○ Neutral - White
1	5 710 83A	● Magnesium	5	5 751 43A	● Soft Alu
1	5 700 83A	■ Champagne	5	5 751 45A	● Graphite
		○ Soft Alu	5	5 751 46A	● Magnesium
			5	5 751 47A	■ Champagne
		2P+E - 1-gang USB Type-C 18 W Fast charge feature: USB Type-C Power Delivery	1	5 751 16A	● Dark Bronze
		Consumption in passive mode < 0.07 W			● Brushed Metal - Stainless Steel
1	5 721 62A	○ White	5	5 754 67	For 1-gang switched socket outlet USB Type-C 18 W
1	5 726 62A	● Magnesium	5	5 754 68	○ Neutral - White
1	5 722 62A	■ Champagne	5	5 754 69	● Soft Alu
1	5 722 64A	○ Soft Alu	5	5 754 71	● Graphite
			5	5 754 72	● Magnesium
		2 x 2P+E - 2-gang USB Type-A + Type-C 3 A - 5 V~ - 15 W Consumption in passive mode < 0.07 W	5	5 754 73	■ Champagne
1	5 721 39	○ White	1	5 754 74	● Dark Bronze
1	5 726 39	● Magnesium			● Brushed Metal - Stainless Steel
1	5 710 84	■ Champagne			For 2-gang switched socket outlet USB Type-A + Type-C 3 A - 5 V~ - 15 W
1	5 700 84	○ Soft Alu	5	5 751 70	○ Neutral - White
			5	5 751 72	● Soft Alu
		2 x 2P+E - 2-gang USB Type-A + Type-C 27 W Fast charge feature: USB Type-C Power Delivery	5	5 751 71	● Graphite
		Consumption in passive mode < 0.07 W	5	5 751 73	● Magnesium
1	5 722 87	○ White	5	5 751 74	■ Champagne
1	5 727 92	● Magnesium	5	5 751 75	● Dark Bronze
1	5 700 86	■ Champagne	1	5 751 76	● Brushed Metal - Stainless Steel
1	5 710 94	○ Soft Alu			For 2-gang switched socket outlet USB Type-A + Type-C 27 W
			5	5 754 44	○ Neutral - White
			5	5 754 46	● Soft Alu
			5	5 754 45	● Graphite
			5	5 754 47	● Magnesium
			5	5 754 48	■ Champagne
			5	5 754 49	● Dark Bronze
			1	5 754 51	● Brushed Metal - Stainless Steel



Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Multistandard socket outlets	Pack	Cat.Nos	German standard socket outlets 16 A
10	5 721 23	2P+E unswitched - shuttered for child safety - 2 modules <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu	10	5 721 18	2 modules
10	5 726 23		10	5 726 18	2P+E shuttered for child safety <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
10	5 700 42		10	5 700 41	<input type="radio"/> Dedicated green
10	5 710 42		10	5 710 41	<input type="radio"/> Dedicated orange
5	5 721 35	2P+E switched - shuttered for child safety - 3 modules <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu	10	5 724 62	2P+E tamperproof, shuttered for child safety Used to identify a mains circuit (e.g. inverter) and avoid connection of unnecessary equipment which may cause interference on the circuit
5	5 726 35		10	5 724 60	To be used with tamperproof insert Cat.No 0 502 99 (see p. 37) <input type="radio"/> Red tamperproof
5	5 724 42		10	5 724 63	
5	5 724 41		10	5 721 19	2P+E with cover <input type="radio"/> White
		British standard socket outlets Shuttered for child safety ASTA licence Conform to BS 1363 Part 2	10	5 726 19	<input checked="" type="radio"/> Magnesium
		2P+E switched - 15 A Conform to BS 546 3 modules	10	5 710 19	<input type="radio"/> Champagne
5	5 721 32	<input type="radio"/> White	10	5 700 19	<input type="radio"/> Soft Alu
5	5 726 32	<input checked="" type="radio"/> Magnesium			
5	5 700 45	<input type="radio"/> Champagne			
5	5 710 45	<input type="radio"/> Soft Alu			
		2P+E - 13 A Conform to BS 1363 Part 2 ASTA licence 2 modules	10	5 721 04	2P with shutters - 1 module <input type="radio"/> White
		<input type="radio"/> White	10	5 726 04	<input checked="" type="radio"/> Magnesium
10	5 721 11	<input checked="" type="radio"/> Magnesium	10	5 700 37	<input type="radio"/> Champagne
10	5 726 11	<input type="radio"/> Champagne	10	5 710 37	<input type="radio"/> Soft Alu
10	5 700 38	<input type="radio"/> Soft Alu			
10	5 710 38	Red	10	5 721 16	2P+E with shutters - 2 modules <input type="radio"/> White
10	5 726 41		10	5 726 16	<input checked="" type="radio"/> Magnesium
		2P+E switched - 13 A Conform to BS 1363 Part 2 ASTA licence 3 modules	10	5 700 39	<input type="radio"/> Champagne
		<input type="radio"/> White	10	5 710 39	<input type="radio"/> Soft Alu
5	5 721 30	<input checked="" type="radio"/> Magnesium			
5	5 726 30	<input type="radio"/> Champagne	5	5 721 33	2 x 2P+E with shutters - 3 modules <input type="radio"/> White
5	5 700 44	<input type="radio"/> Soft Alu	5	5 726 33	<input checked="" type="radio"/> Magnesium
5	5 710 44	Red dedicated non standard pin	5	5 700 46	<input type="radio"/> Champagne
5	5 724 67		5	5 710 46	<input type="radio"/> Soft Alu
		2P+E - 5 A Conform to BS 546 2 modules			
		<input type="radio"/> White	10	5 721 05	American type socket outlets 15 A - 127 V 2P - 1 module <input type="radio"/> White
10	5 721 10	<input checked="" type="radio"/> Magnesium	10	5 726 05	<input checked="" type="radio"/> Magnesium
10	5 726 10	<input type="radio"/> Champagne	10	5 710 72	<input type="radio"/> Champagne
10	5 710 71	<input type="radio"/> Soft Alu	10	5 700 72	<input type="radio"/> Soft Alu
10	5 700 71				
			10	5 721 17	2P+E - 2 modules <input type="radio"/> White
			10	5 726 17	<input checked="" type="radio"/> Magnesium
			10	5 700 40	<input type="radio"/> Champagne
			10	5 710 40	<input type="radio"/> Soft Alu
			5	5 721 34	2 x 2P+E - 3 modules <input type="radio"/> White
			5	5 726 34	<input checked="" type="radio"/> Magnesium
			5	5 700 47	<input type="radio"/> Champagne
			5	5 710 47	<input type="radio"/> Soft Alu

Support frames and plates,
p. 45 and 54 to 63



Red catalogue numbers: New products

Arteor™

international socket outlets (continued)



5 725 66



5 721 32



5 720 70 + plate 5 753 00



5 721 00



Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	South African type socket outlets - 16 A
		2P+E unswitched - 1 module Conform to SANS 164-2 Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)
10	5 721 36	○ White ● Magnesium ○ Champagne ○ Soft Alu
10	5 726 36	
10	5 726 48	
10	5 721 48	
		2 new RSA socket outlets (164-2) and 1 old RSA switched socket outlet (164-1) Prewired, monobloc, 4x4 Supplied with support frame and rocker plate, to be equipped with 2x3 modules plate
1	5 720 66	○ White ● Magnesium ○ Champagne ○ Soft Alu
1	5 725 66	
1	5 710 92	
1	5 700 90	
		2P+E - shuttered for child safety - 2 modules Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)
10	5 721 22	○ White ● Magnesium ○ Champagne ○ Soft Alu ● Red
10	5 726 22	
10	5 724 26	
10	5 724 25	
10	5 724 61	
		2P+E switched - shuttered for child safety - 3 modules Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)
5	5 721 32	○ White ● Magnesium ○ Champagne ○ Soft Alu ● Red dedicated
5	5 726 32	
5	5 724 28	
5	5 724 27	
5	5 724 65	
		2 x 2P+E switched - pre-wired - 2-gang Supplied with support frame and rocker plate, to be equipped with 2x3 modules plate
1	5 720 22	○ White ● Magnesium ○ Champagne ○ Soft Alu
1	5 725 22	
1	5 700 22	
1	5 710 22	

Pack	Cat.Nos	South African type socket outlets - 16 A with USB charger
		All switched new RSA socket outlet (164-2) and old RSA socket outlet (164-1) Prewired, monobloc, 4x4 Supplied with support frame and rocker plate, to be equipped with 2x3 modules plate USB Type-A + Type-C, 3 A - 5 V _{DC} - 15 W Consumption of USB in passive mode < 0,08 W (when switched) The main switch controls the two RSA socket outlets and the double USB charger
1	5 720 70	○ White ● Magnesium ○ Champagne ○ Soft Alu
1	5 725 70	
1	5 710 93	
1	5 700 91	
		ELV socket outlets 3 A
		2P Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63) 12 mm fixing centres for plug Cat.No 0 500 05 1 module
10	5 721 00	○ White ● Magnesium
10	5 726 00	
20	0 500 05	Plug 2P - 3 A for ELV socket outlet 12 mm fixing centres pins Ø3.6 mm



5 721 01



5 718 20



5 721 12



5 736 70



5 734 71



5 925 30



5 926 30

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Italian type socket outlets	Pack	Cat.Nos	Indian and Euro-US combined socket outlets
		1 module			6 A - 10 A - 240 V and 15 A - 127 V
10	5 721 03	2P+E shuttered for child safety - 10/16 A	2P+E		Shuttered for child safety
10	5 726 03	○ White	2 modules		
10	5 700 36	● Magnesium	○ White		
10	5 710 36	■ Champagne	● Magnesium		
		● Soft Alu	■ Champagne		
		Swiss type socket outlets			Indian standard socket outlets
		T 13, 10 A, 250 V, 2P+E			6 A / 16 A
		Automatic terminals, 2 modules			3 pin combined (2P + Earth)
10	5 718 20	○ White	10	5 734 71	Shuttered for child safety
10	5 718 70	● Magnesium	10	5 736 71	2 modules
10	5 710 73	■ Champagne	10	5 748 34	○ White
10	5 700 73	● Soft Alu			● Magnesium
					■ Champagne
		T 13, 10 A, 250 V, 2P+E with shutters			
		Automatic terminals, 2 modules			
10	5 721 15	○ White			
		2 x T 13, 10 A, 250 V, 2P+E			
		2 modules			
10	5 718 27	○ White	20	5 925 30	Brazil standard sockets
10	5 718 77	● Magnesium	20	5 926 30	Complies to Standard NBR 14.136
10	5 710 74	■ Champagne			Socket - 1 module - 10A
10	5 700 74	● Soft Alu			○ White
					● Magnesium
		Australian type socket outlets			Socket - 1 module - 20A
		2 modules			○ White
		2P+E auto-switched shuttered for child safety - 10 A			● Magnesium
10	5 721 14	○ White			
10	5 726 14	● Magnesium			
10	5 726 15	■ Champagne			
10	5 726 02	● Soft Alu			
		2P+E switched shuttered for child safety - 10 A			
		3 modules			
10	5 721 25	○ White			
10	5 726 25	● Magnesium			
		2P+E auto-switched with round earth - 10 A			
		2 modules			
10	5 721 26	○ White			
10	5 726 26	● Magnesium			
		2P+E shuttered for child safety - 10/15 A			
		2 modules			
10	5 721 12	○ White			
10	5 726 12	● Magnesium			
10	5 726 07	■ Champagne			
10	5 721 07	● Soft Alu			
		2 x 2P+E auto-switched - 10 A			
		With integrated frame			
10	5 721 52	○ White			
10	5 726 52	● Magnesium			


Support frames
and plates,
p. 45 and 54 to 63


Arteor™

international socket outlets (continued)



Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Chinese type socket outlets	Pack	Cat.Nos	French standard socket outlets 10/16 A
		2P+E shuttered for child safety - 10 A 2 modules			2 modules
10	5 721 13	White	10	5 720 20	2P shuttered for child safety
10	5 726 13	Magnesium	10	5 725 20	White
10	5 726 08	Champagne	10	5 710 86	Magnesium
10	5 721 08	Soft Alu	10	5 710 85	Champagne
		2P+E shuttered for child safety - 16 A 2 modules			Soft Alu
10	5 721 21	White	10	5 720 21	2P+E shuttered for child safety
10	5 726 21	Magnesium	10	5 725 21	White
10	5 723 67	Champagne	10	5 700 21	Magnesium
10	5 723 66	Soft Alu	10	5 710 21	Champagne
		2P+E Chinese + 2P US - 10 A 3 modules			Soft Alu
5	5 718 96	White			2P+E tamperproof
5	5 718 97	Magnesium			Used to identify a mains circuit (e.g. inverter) and avoid connection of unnecessary equipment which may cause interference on the circuit
5	5 718 98	Champagne			
5	5 718 99	Soft Alu	10	5 724 66	Red
		Israeli type socket outlets			Tamperproof insert for Cat.Nos 5 724 66 and 5 724 63
		2P+E shuttered for child safety	10	0 502 99	Tamperproof insert for socket Fits directly into the plug
10	5 721 24	White			
10	5 726 24	Magnesium			
10	5 700 43	Champagne			
10	5 710 43	Soft Alu			

Arteor™

telephone sockets



5 723 00

5 700 56

5 710 56

5 728 13

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos
	RJ 11 and RJ 12 sockets
10	5 723 00
10	5 728 00
10	5 700 56
10	5 710 56
	RJ 11 - 1 module
	4 contacts
	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
	RJ 11 - 2 modules
	4 contacts
	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
	RJ 12 - 2 modules
	6 contacts
	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu

Pack	Cat.Nos
	Telephone sockets
10	5 723 10
10	5 728 10
10	5 726 87
10	5 726 86
	Single master - 2 modules
	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
	Single secondary - 1 module
	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu

RJ 11 and RJ 12 sockets

Equipped with modular Jack connector with 1/4 turn terminal for fast connection (possible looping)

RJ 11 - 1 module

4 contacts



- White
- Magnesium
- Champagne
- Soft Alu

RJ 11 - 2 modules

4 contacts



- White
- Magnesium
- Champagne
- Soft Alu

RJ 12 - 2 modules

6 contacts



- White
- Magnesium
- Champagne
- Soft Alu

Telephone sockets

With IDC connection
Conform to British Telecom

Single master - 2 modules



- White
- Magnesium
- Champagne
- Soft Alu

Single secondary - 1 module



- White
- Magnesium
- Champagne
- Soft Alu



**Support frames
and plates,
p. 45 and 54 to 63**



Arteor™

television sockets



5 721 72 5 721 69 5 721 71 5 721 63

For Dvbt, Cablecast and satellite installation
UHD TV quality compatible

Classe A shielded star socket LTE ready (4G protected)

Recommended coaxial cable: 17 VATCA

Star cabling (1 socket = 1 cable to antenna, splitter or multiswitch)

Visual check of the connection

Meets EN 50083-4 and EN 50083-2 European directive

Pack	Cat.Nos
	Multi TV star sockets
10	5 721 72
10	5 726 72
10	5 726 91
10	5 726 90
	TV-R-SAT sockets
	DAB+
	Low attenuation: 1.5 dB
	2 modules
	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
	TV-R-SAT-SAT sockets
	In1: TV-R-SAT1 / In2: SAT2
	Low attenuation: 1.5 dB
	2 modules
	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
	TV-SAT sockets
	1 module
	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
	Single TV star sockets - 1 module
	Low attenuation 1dB
	1 module
10	5 721 67
10	5 726 67
10	5 726 95
10	5 726 94
	TV 9.5 mm male sockets
	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
	TV "F" type sockets
	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu

Pack	Cat.Nos
10	5 721 71
10	5 726 71
10	5 700 51
10	5 710 51
10	5 721 63
10	5 726 63
10	5 700 50
10	5 710 50

Support frames and plates

p. 45 and 54 to 63

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform to British Telecom

Single master - 2 modules

With IDC connection

Conform to British Telecom

Single secondary - 1 module

With IDC connection

Conform

Arteor™


television sockets

Information about DAB+

Digital Audio Broadcasting is the radio equivalent of DTT, a global standard used all over the world.

- More radio stations available
- Better sound quality
- Digital data combined with the audio stream
- This socket has a reception range of radio DAB+ 87.5 - 240 MHz
- A link to a collective or individual aerial
- Digital quality


Roll-out in 2022

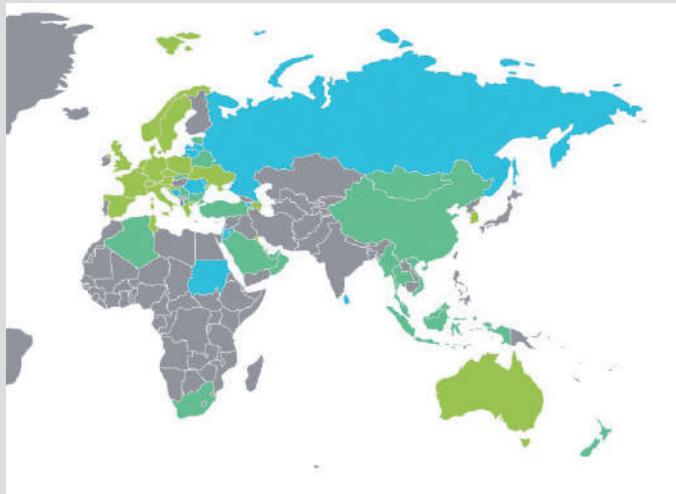


Source: WorldDAB

- Countries with regular services
- Countries with trials and/or regulation
- Countries with interest

High performance

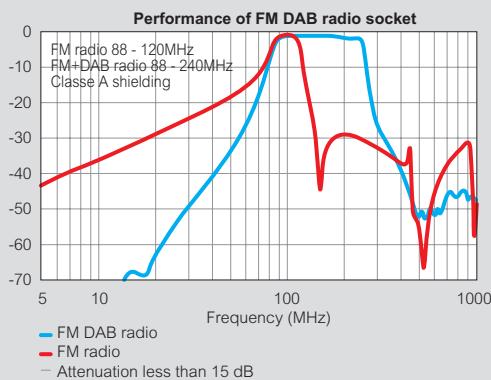


Return loss input

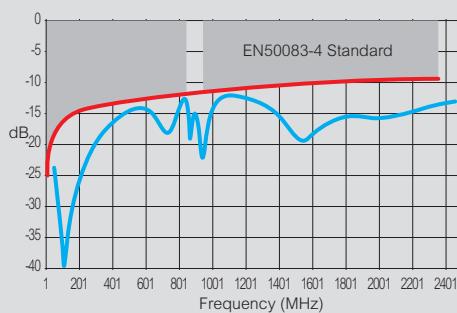


Coupling attenuation

IN SAT

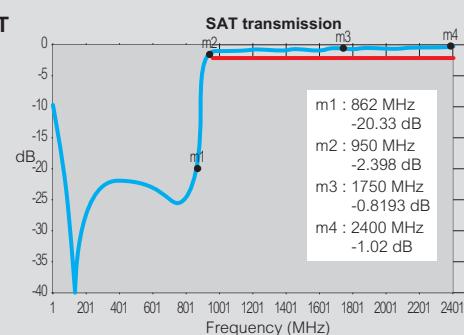

IN TV

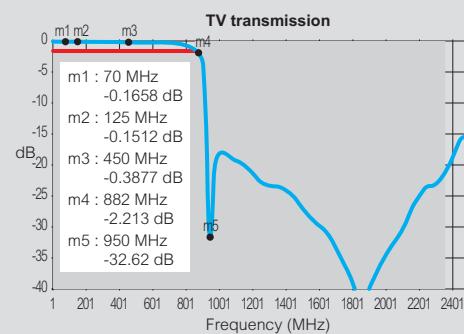


Certification

Class A sockets, protected with LTE block filter. LTE protection is needed to prevent interference from new signals used by smartphones (3G, 4G, 5G). These undesirable signals can cause picture freezing or breaking up, and distorted sound. Legrand uses the PKM laboratory for Class A certification of its sockets.

Requirements for TV corner

- Multi-gang wiring accessories
- TV attenuation < 1.5 dB
- 17 VATC coaxial cable
- Cat. 6 twisted pairs
- Multi-operator, terrestrial DTT, satellite, cable network and ISP, FM and DAB+ radio reception



- Internet connection



- Smart TV with interactive services
- Connected games console (for online gaming)



Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Equipped with connectors with quick toolless connection

Take single-core cables from AWG 22 up to AWG 26, and AWG 26 multicore cables

T568A and B marking with colour codes

Compliant with ISO/IEC 11 801, EN 50173 and ANSI/TIA 568 standards

Pack	Cat.Nos	Cat. 6A sockets
		360° metal shielding
		STP - 1 module
10	5 723 06	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
10	5 728 06	<input type="radio"/> White with orange shutter <input checked="" type="radio"/> Magnesium with orange shutter <input type="radio"/> Champagne with orange shutter <input type="radio"/> Soft Alu with orange shutter
10	5 728 46	<input type="radio"/> White with green shutter <input checked="" type="radio"/> Magnesium with green shutter <input type="radio"/> Champagne with green shutter <input type="radio"/> Soft Alu with green shutter
10	5 728 45	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
10	5 723 51	<input type="radio"/> White with red shutter <input checked="" type="radio"/> Magnesium with red shutter <input type="radio"/> Champagne with red shutter <input type="radio"/> Soft Alu with red shutter
10	5 728 51	<input type="radio"/> White with orange shutter <input checked="" type="radio"/> Magnesium with orange shutter <input type="radio"/> Champagne with orange shutter <input type="radio"/> Soft Alu with orange shutter
10	5 728 48	<input type="radio"/> White with green shutter <input checked="" type="radio"/> Magnesium with green shutter <input type="radio"/> Champagne with green shutter <input type="radio"/> Soft Alu with green shutter
10	5 728 47	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
10	5 723 52	<input type="radio"/> White with green shutter <input checked="" type="radio"/> Magnesium with green shutter <input type="radio"/> Champagne with green shutter <input type="radio"/> Soft Alu with green shutter
10	5 728 52	<input type="radio"/> White with red shutter <input checked="" type="radio"/> Magnesium with red shutter <input type="radio"/> Champagne with red shutter <input type="radio"/> Soft Alu with red shutter
10	5 728 61	<input type="radio"/> White with orange shutter <input checked="" type="radio"/> Magnesium with orange shutter <input type="radio"/> Champagne with orange shutter <input type="radio"/> Soft Alu with orange shutter
10	5 728 60	<input type="radio"/> White with green shutter <input checked="" type="radio"/> Magnesium with green shutter <input type="radio"/> Champagne with green shutter <input type="radio"/> Soft Alu with green shutter
		STP with controlled access - 2 modules
		Supplied with 2 keys for 5 sockets
5	5 723 50	<input type="radio"/> White with red shutter <input checked="" type="radio"/> Magnesium with red shutter <input type="radio"/> Champagne with red shutter <input type="radio"/> Soft Alu with red shutter
5	5 728 50	<input type="radio"/> White with orange shutter <input checked="" type="radio"/> Magnesium with orange shutter <input type="radio"/> Champagne with orange shutter <input type="radio"/> Soft Alu with orange shutter
5	5 728 63	<input type="radio"/> White with green shutter <input checked="" type="radio"/> Magnesium with green shutter <input type="radio"/> Champagne with green shutter <input type="radio"/> Soft Alu with green shutter
5	5 728 62	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
		UTP - 1 module
10	5 723 49	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
10	5 728 49	<input type="radio"/> White with orange shutter <input checked="" type="radio"/> Magnesium with orange shutter <input type="radio"/> Champagne with orange shutter <input type="radio"/> Soft Alu with orange shutter
10	5 728 65	<input type="radio"/> White with green shutter <input checked="" type="radio"/> Magnesium with green shutter <input type="radio"/> Champagne with green shutter <input type="radio"/> Soft Alu with green shutter
10	5 728 64	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
10	5 723 58	<input type="radio"/> White with red shutter <input checked="" type="radio"/> Magnesium with red shutter <input type="radio"/> Champagne with red shutter <input type="radio"/> Soft Alu with red shutter
10	5 728 58	<input type="radio"/> White with orange shutter <input checked="" type="radio"/> Magnesium with orange shutter <input type="radio"/> Champagne with orange shutter <input type="radio"/> Soft Alu with orange shutter
10	5 728 69	<input type="radio"/> White with green shutter <input checked="" type="radio"/> Magnesium with green shutter <input type="radio"/> Champagne with green shutter <input type="radio"/> Soft Alu with green shutter
10	5 728 68	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
10	5 723 59	<input type="radio"/> White with green shutter <input checked="" type="radio"/> Magnesium with green shutter <input type="radio"/> Champagne with green shutter <input type="radio"/> Soft Alu with green shutter
10	5 728 59	<input type="radio"/> White with red shutter <input checked="" type="radio"/> Magnesium with red shutter <input type="radio"/> Champagne with red shutter <input type="radio"/> Soft Alu with red shutter
10	5 728 67	<input type="radio"/> White with orange shutter <input checked="" type="radio"/> Magnesium with orange shutter <input type="radio"/> Champagne with orange shutter <input type="radio"/> Soft Alu with orange shutter
10	5 728 66	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
		UTP with controlled access - 2 modules
		Supplied with 2 keys for 5 sockets
5	5 723 57	<input type="radio"/> White with red shutter <input checked="" type="radio"/> Magnesium with red shutter <input type="radio"/> Champagne with red shutter <input type="radio"/> Soft Alu with red shutter
5	5 728 57	<input type="radio"/> White with orange shutter <input checked="" type="radio"/> Magnesium with orange shutter <input type="radio"/> Champagne with orange shutter <input type="radio"/> Soft Alu with orange shutter
5	5 728 72	<input type="radio"/> White with green shutter <input checked="" type="radio"/> Magnesium with green shutter <input type="radio"/> Champagne with green shutter <input type="radio"/> Soft Alu with green shutter
5	5 728 71	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu

Pack	Cat.Nos	Cat. 6 sockets
10	5 723 02	UTP - 1 module
10	5 728 02	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
10	5 700 57	<input type="radio"/> White with orange shutter <input checked="" type="radio"/> Magnesium with orange shutter <input type="radio"/> Champagne with orange shutter <input type="radio"/> Soft Alu with orange shutter
10	5 710 57	<input type="radio"/> White with green shutter <input checked="" type="radio"/> Magnesium with green shutter <input type="radio"/> Champagne with green shutter <input type="radio"/> Soft Alu with green shutter
10	5 723 54	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
10	5 728 54	<input type="radio"/> White with red shutter <input checked="" type="radio"/> Magnesium with red shutter <input type="radio"/> Champagne with red shutter <input type="radio"/> Soft Alu with red shutter
10	5 728 74	<input type="radio"/> White with orange shutter <input checked="" type="radio"/> Magnesium with orange shutter <input type="radio"/> Champagne with orange shutter <input type="radio"/> Soft Alu with orange shutter
10	5 728 73	<input type="radio"/> White with green shutter <input checked="" type="radio"/> Magnesium with green shutter <input type="radio"/> Champagne with green shutter <input type="radio"/> Soft Alu with green shutter
10	5 723 55	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
10	5 728 55	<input type="radio"/> White with red shutter <input checked="" type="radio"/> Magnesium with red shutter <input type="radio"/> Champagne with red shutter <input type="radio"/> Soft Alu with red shutter
10	5 728 80	<input type="radio"/> White with orange shutter <input checked="" type="radio"/> Magnesium with orange shutter <input type="radio"/> Champagne with orange shutter <input type="radio"/> Soft Alu with orange shutter
10	5 728 79	<input type="radio"/> White with green shutter <input checked="" type="radio"/> Magnesium with green shutter <input type="radio"/> Champagne with green shutter <input type="radio"/> Soft Alu with green shutter
10	5 723 14	UTP - 2 modules
10	5 728 14	<input type="radio"/> White - square version <input checked="" type="radio"/> Magnesium - square version <input type="radio"/> Champagne - square version <input type="radio"/> Soft Alu - square version
10	5 700 59	<input type="radio"/> White - round version <input checked="" type="radio"/> Magnesium - round version <input type="radio"/> Champagne - round version <input type="radio"/> Soft Alu - round version
10	5 710 59	<input type="radio"/> White - square version <input checked="" type="radio"/> Magnesium - square version <input type="radio"/> Champagne - square version <input type="radio"/> Soft Alu - square version
10	5 723 24	<input type="radio"/> White - round version <input checked="" type="radio"/> Magnesium - round version <input type="radio"/> Champagne - round version <input type="radio"/> Soft Alu - round version
10	5 728 24	<input type="radio"/> White - square version <input checked="" type="radio"/> Magnesium - square version <input type="radio"/> Champagne - square version <input type="radio"/> Soft Alu - square version
10	5 728 81	<input type="radio"/> White with red shutter <input checked="" type="radio"/> Magnesium with red shutter <input type="radio"/> Champagne with red shutter <input type="radio"/> Soft Alu with red shutter
5	5 723 53	UTP with controlled access - 2 modules
5	5 728 53	<input type="radio"/> White with red shutter <input checked="" type="radio"/> Magnesium with red shutter <input type="radio"/> Champagne with red shutter <input type="radio"/> Soft Alu with red shutter
5	5 728 87	<input type="radio"/> White with orange shutter <input checked="" type="radio"/> Magnesium with orange shutter <input type="radio"/> Champagne with orange shutter <input type="radio"/> Soft Alu with orange shutter
5	5 728 86	<input type="radio"/> White with green shutter <input checked="" type="radio"/> Magnesium with green shutter <input type="radio"/> Champagne with green shutter <input type="radio"/> Soft Alu with green shutter
1	5 723 39	UTP with retractable cord - 4 modules
1	5 728 39	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
1	5 728 89	<input type="radio"/> White with red shutter <input checked="" type="radio"/> Magnesium with red shutter <input type="radio"/> Champagne with red shutter <input type="radio"/> Soft Alu with red shutter
1	5 728 88	<input type="radio"/> White with orange shutter <input checked="" type="radio"/> Magnesium with orange shutter <input type="radio"/> Champagne with orange shutter <input type="radio"/> Soft Alu with orange shutter
10	5 723 22	FTP - 1 module
10	5 728 22	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
10	5 728 91	<input type="radio"/> White with orange shutter <input checked="" type="radio"/> Magnesium with orange shutter <input type="radio"/> Champagne with orange shutter <input type="radio"/> Soft Alu with orange shutter
10	5 728 90	<input type="radio"/> White with green shutter <input checked="" type="radio"/> Magnesium with green shutter <input type="radio"/> Champagne with green shutter <input type="radio"/> Soft Alu with green shutter
10	5 723 16	FTP - 2 modules
10	5 728 16	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
10	5 728 93	<input type="radio"/> White with orange shutter <input checked="" type="radio"/> Magnesium with orange shutter <input type="radio"/> Champagne with orange shutter <input type="radio"/> Soft Alu with orange shutter
10	5 728 92	<input type="radio"/> White with green shutter <input checked="" type="radio"/> Magnesium with green shutter <input type="radio"/> Champagne with green shutter <input type="radio"/> Soft Alu with green shutter
10	5 723 23	STP shielded - 1 module
10	5 728 23	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
10	5 728 95	<input type="radio"/> White with red shutter <input checked="" type="radio"/> Magnesium with red shutter <input type="radio"/> Champagne with red shutter <input type="radio"/> Soft Alu with red shutter
10	5 728 94	<input type="radio"/> White with orange shutter <input checked="" type="radio"/> Magnesium with orange shutter <input type="radio"/> Champagne with orange shutter <input type="radio"/> Soft Alu with orange shutter
10	5 723 17	STP shielded - 2 modules
10	5 728 17	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
10	5 728 97	<input type="radio"/> White with orange shutter <input checked="" type="radio"/> Magnesium with orange shutter <input type="radio"/> Champagne with orange shutter <input type="radio"/> Soft Alu with orange shutter
10	5 728 96	<input type="radio"/> White with green shutter <input checked="" type="radio"/> Magnesium with green shutter <input type="radio"/> Champagne with green shutter <input type="radio"/> Soft Alu with green shutter

Support frames and plates,
p. 45 and 54 to 63



Arteor™

RJ 45 sockets (continued)



5 723 15

Can be integrated in any support
 Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)
 Equipped with connectors with quick toolless connection
 Take single-core cables from AWG 22 up to AWG 26, and AWG 26 multicore cables
 T568A and B marking with colour codes
 Compliant with ISO/IEC 11 801, EN 50173 and ANSI/TIA 568 standards

Pack	Cat.Nos	Cat. 5e sockets
10	5 723 03	UTP - 1 module
10	5 728 03	<input type="radio"/> White ● Magnesium ■ Champagne ○ Soft Alu
10	5 700 58	
10	5 710 58	
10	5 723 15	UTP - 2 modules
10	5 728 15	<input type="radio"/> White ● Magnesium ■ Champagne ○ Soft Alu
10	5 728 99	
10	5 728 98	
10	5 723 04	FTP - 1 module
10	5 728 04	<input type="radio"/> White ● Magnesium ■ Champagne ○ Soft Alu
10	5 729 08	
10	5 729 07	

Arteor™

rear pluggable data sockets



5 723 31



5 728 32



5 723 36



5 728 35

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Rear pluggable RJ 45 sockets
10	5 723 31	Certified as conforming to standards ISO 11801 ed. 2.0, EN 50173-1 and EIA/TIA 568 Contacts marked with 568 A and B dual colour code and numbers Connectors with self-stripping terminals Possibility of re-wiring in the event of error Multidirectional cable entry For use with area distribution boxes connection to boxes via RJ 45-RJ 45 dedicated cords Used to create cat. 6 and cat. 5e links in accordance with standards 2 modules
10	5 728 31	Cat. 6 - UTP <input type="radio"/> White ● Magnesium ■ Champagne ○ Soft Alu
10	5 729 10	Cat. 6 - FTP <input type="radio"/> White ● Magnesium ■ Champagne ○ Soft Alu
10	5 729 09	Cat. 5e - UTP <input type="radio"/> White ● Magnesium ■ Champagne ○ Soft Alu
10	5 723 33	Cat. 5e - FTP <input type="radio"/> White ● Magnesium ■ Champagne ○ Soft Alu
10	5 728 33	
10	5 729 12	
10	5 729 11	
10	5 723 30	
10	5 728 30	
10	5 729 18	
10	5 729 17	
10	5 723 32	
10	5 728 32	
10	5 729 20	
10	5 729 19	

Arteor™

adaptors for data sockets



5 723 37



5 728 37

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos
10	5 723 37
10	5 728 37
10	5 729 32
10	5 729 31

Adaptors for Keystone data sockets

Equipped with transparent label-holder

Single connector - 2 modules



- White
- Magnesium
- Champagne
- Soft Alu

Pack	Cat.Nos
10	5 723 38
10	5 728 38
10	5 729 34
10	5 729 33

Adaptors for Systimax data sockets

Equipped with transparent label-holder

Single connector - 2 modules



- White
- Magnesium
- Champagne
- Soft Alu

Arteor™

USB data sockets



5 720 94

5 727 75



5 720 23

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos
1	5 720 94
1	5 725 94
1	5 725 76
1	5 725 75
1	5 722 75
1	5 727 75
1	5 725 53
1	5 725 52
1	5 720 23

USB data sockets for data transfer

Used to bring connections closer to the user
For connecting USB devices (interactive whiteboard, scanner-printer, external hard disk)

Preterminated - USB 2.0 - 1 module

Maximum length: 5 m
Recommended cable: USB A
Equipped with a 15 cm cord



- White
- Magnesium
- Champagne
- Soft Alu

Connection via screw terminals - USB 2.0 - 1 module

Maximum length: 5 m
Recommended cable: USB A
Cross-section 1 mm²



- White
- Magnesium
- Champagne
- Soft Alu


USB Data extender

Used to bring connections closer to the user in case of large distances. For connecting USB devices (digital school board / interactive whiteboard...) located more than 5 m away (30 m max.) from a source (computer...)

The kit includes
- a transmitter (1 module)
- a receiver (1 module)

The link between the transmitter and the receiver is made via a RJ 45/RJ 45 cord

- White



Support frames
and plates,
p. 45 and 54 to 63



Arteor™

audio and video sockets



5 720 96



0 517 38



5 720 90



5 720 97

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Product Description	Pack	Cat.Nos	Product Description
		HDMI type A sockets			HD15 sockets
		Used to transmit high-definition digital audio/video streams between a source (Blu-ray player, computer) and a compatible receiver (TV, videoprojector...)			Used to transmit analog video streams (VGA, XGA, UXGA depending on graphic card) between a source (computer) and a compatible receiver (LCD, video projector, TV, etc...)
1	5 720 96	Preterminated sockets HDMI 1.4 - 1 module Equipped with cord, length 15 cm	1	5 720 97	Preterminated sockets - 1 module Equipped with cord, length 15 cm
1	5 725 96		1	5 725 97	
1	5 725 18	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu	1	5 722 82	Screw-type female HD15 sockets - 2 modules
1	5 725 17		1	5 722 88	
		Preterminated sockets HDMI 1.4 - 2 modules Equipped with cord, length 15 cm	1	5 727 88	<input type="radio"/> White <input checked="" type="radio"/> Magnesium
1	5 722 99	<input type="radio"/> White - square version <input checked="" type="radio"/> Magnesium - square version <input type="radio"/> Champagne - square version <input type="radio"/> Soft Alu - square version			
1	5 725 99				
1	5 723 46	<input type="radio"/> White - round version <input checked="" type="radio"/> Magnesium - round version <input type="radio"/> Soft Alu - round version			
1	5 723 45				
1	5 724 76				
1	5 735 96				
1	5 725 19				
1	0 517 38	HDMI extender Extends HDMI audio/video signals up to 57 m at up to a 4 K resolution between a source (computer, Blu-ray player) and a receiver (videoprojector, TV) in a meeting room or classroom Kit includes both transmitter and receiver with link via a network cord RJ 45/RJ 45 (not supplied) Compatible with 3D video, 4K resolution, EDID passthrough and HDCP Including IR control Certified HD BaseT			
		Display port sockets			
		Used to transmit high-definition digital audio/video streams between a source (laptop, computer, etc) and a compatible receiver (TV, videoprojector...)			
1	5 720 90	Preterminated socket - 1 module Equipped with cord, length 15 cm			
1	5 725 90				
		<input type="radio"/> White <input checked="" type="radio"/> Magnesium			



Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Jack sockets 3.5 mm	Pack	Cat.Nos	3-pole XLR sockets
		3.5 mm Jack connectors can be used to create audio links			For the stereo connection of any peripheral, microphone, mixing console
		Preterminated sockets - 1 module Equipped with cord, length 15 cm			Recommended cable: 1 audio pair 0.14 to 0.5 mm ² shielded Max. cable length: 50 m (beyond this an audio amplifier is recommended)
1	5 720 91	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu			2 modules
1	5 725 91		1	5 722 83	XLR female
1	5 725 59		1	5 727 83	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
1	5 725 55		1	5 724 99	
			1	5 724 98	
		4 screw-type female 3.5 mm Jack socket - 1 module	1	5 722 77	XLR male
1	5 722 74	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu			<input type="radio"/> White
1	5 727 74				
1	5 724 91				
1	5 724 90				
1	5 722 78	<input type="radio"/> White			
		Female 2 RCA sockets			Loudspeaker sockets
		Provide the stereo audio link for any peripheral device such as a DVD drive, camera, video recorder			4 mm ² terminals
		Preterminated - 1 module Equipped with a 15 cm cord	10	5 722 70	1 module
1	5 720 92	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu	10	5 727 70	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
1	5 725 92		10	5 726 97	
1	5 724 79		10	5 726 96	
1	5 724 75		10	5 722 80	2 modules
		Connection on screw terminals - 1 module	10	5 727 80	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
1	5 722 72	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu	10	5 726 99	
1	5 727 72		10	5 726 98	
1	5 724 95				
1	5 724 94				
		Female 3 RCA sockets			Attenuators
		Provide the stereo audio link for any peripheral device such as a DVD drive, camera, video recorder	1	5 722 84	100 V - 25 W
		Connection on screw terminals - 2 modules	1	5 727 84	Allow to adjust power to 25 W from a balanced 100 V loudspeaker line
1	5 722 73	<input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu			2 modules
1	5 727 73				<input type="radio"/> White <input checked="" type="radio"/> Magnesium
1	5 724 97				
1	5 724 96				
		Female BNC 75 sockets			
		Provide the composite video link for any peripheral device such as a DVD drive, camera, video recorder, etc	1	5 722 76	
		Connection on screw terminals - 1 module	1	5 727 76	

Support frames and plates,
p. 45 and 54 to 63



Arteor™

international support frames

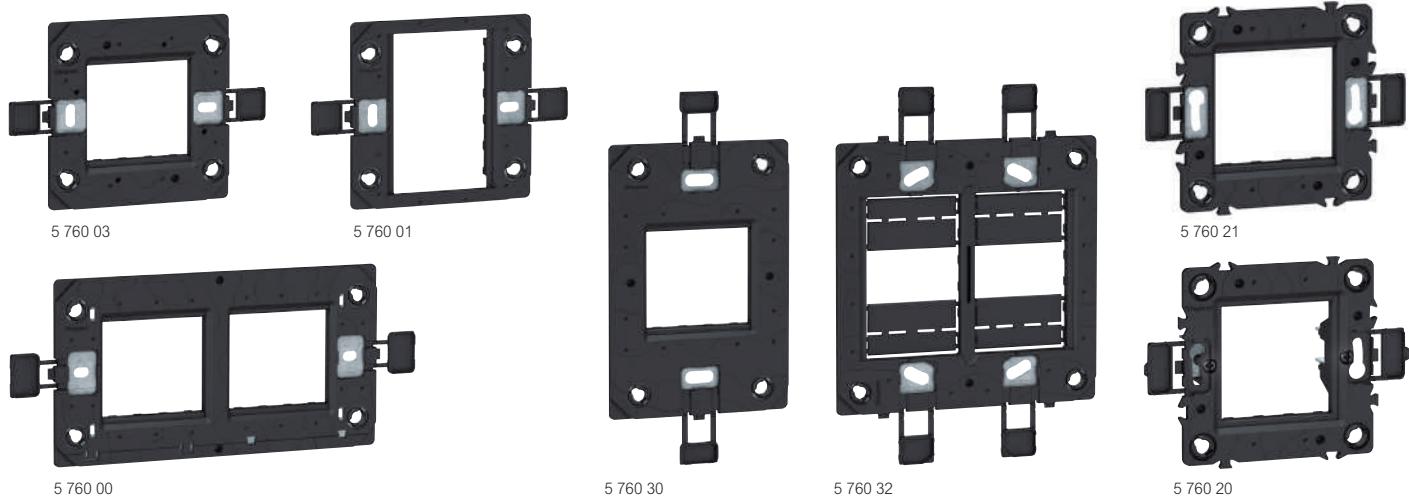





 Plate selection charts p. 54-63

Pack	Cat.Nos	Support frames for BS type boxes 60.3 mm fixing centres
10	5 760 03 5 760 03S 5 760 03S-2	Screw mounting (screws supplied) For 1-gang box (square)  For 1 or 2 modules For 1 or 2 mod. w/ 1 earth terminal For 1 or 2 mod. w/ 2 earth terminal
5	5 760 01 5 760 01S	 For 3 modules For 3 mod. w/ 1 earth terminal
10	5 760 02	For 2-gang box  Rectangular - for 3 modules
10	5 760 00 5 760 00S	 Rectangular - for 2 x 2 modules For 2 x 2 mod. w/ 1 earth terminal

Pack	Cat.Nos	Support frames for US and South African type boxes 83.5 mm fixing centres
10	5 760 30	Screw mounting For 2" x 4" boxes  For 2 modules (electronic functions except 2-module mechanisms to be mounted on 3-module support frame)
10	5 760 40	 For 1 to 3 modules
5	5 760 31	For 4" x 4" boxes  For 2, 3 and 4 modules
5	5 760 32	 For 2 x 3 modules

Pack	Cat.Nos	Support frames for German and French type boxes
10	5 760 21	Screw mounting For 1 or 2 modules 
5	5 760 11	 For 4 modules
5	5 760 12	 For 6 modules Horizontal mounting
2	5 760 22	 For 2 x 6 modules Horizontal mounting
5	5 760 20	Claw mounting For 1 or 2 modules 
10	5 760 40	Support frame for Italian type boxes 83.5 mm fixing centres Screw mounting For 1 to 3 modules 

Arteor™

ancillary mechanisms



5 723 21

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Blank modules
10	5 723 41	1 module <input type="radio"/> White - square version <input checked="" type="radio"/> Magnesium - square version <input type="radio"/> Champagne - square version <input type="radio"/> Soft Alu - square version
10	5 728 41	
10	5 700 60	
10	5 710 60	
10	5 723 42	2 modules <input type="radio"/> White - square version <input checked="" type="radio"/> Magnesium - square version <input type="radio"/> Champagne - square version <input type="radio"/> Soft Alu - square version
10	5 728 42	
10	5 700 61	
10	5 710 61	
10	5 730 86	<input type="radio"/> White - round version <input checked="" type="radio"/> Magnesium - round version <input type="radio"/> Soft Alu - round version
10	5 731 86	
10	5 731 88	
5	5 723 43	3 modules <input type="radio"/> White - square version <input checked="" type="radio"/> Magnesium - square version <input type="radio"/> Champagne - square version <input type="radio"/> Soft Alu - square version
5	5 728 43	
5	5 728 20	
5	5 728 19	
5	5 730 96	<input type="radio"/> White - round version <input checked="" type="radio"/> Magnesium - round version <input type="radio"/> Soft Alu - round version
5	5 731 96	
5	5 731 89	

Pack	Cat.Nos	Cable outlets
10	5 723 20	20 A cable outlet for junction - 2 modules <input type="radio"/> White
5	5 723 21	45 A cable outlet - BS 1-gang Supplied with cover plate For flush-mounting back box to be min. 45 mm deep <input type="radio"/> White

Pack	Cat.Nos	Cord outlets
10	5 723 07	1 module with Ø8 mm entry <input type="radio"/> White
10	5 723 19	2 modules <input type="radio"/> White



Arteor™

blanking cover plates



5 716 08



5 754 10

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	British standard blanking cover plates
5	5 751 30	For 1-gang box <input type="radio"/> White <input type="radio"/> Soft Alu <input checked="" type="radio"/> Graphite <input type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Dark Bronze
5	5 716 08	
5	5 751 32	
5	5 716 10	
5	5 716 12	
5	5 716 14	
5	5 751 40	For 2-gang box <input type="radio"/> White <input type="radio"/> Soft Alu <input checked="" type="radio"/> Graphite <input type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Dark Bronze
5	5 716 09	
5	5 751 42	
5	5 716 11	
5	5 716 13	
5	5 716 15	

Pack	Cat.Nos	Italian/US standard blanking cover plates
10	5 754 10	For 2" x 4" boxes <input type="radio"/> White <input type="radio"/> Soft Alu <input checked="" type="radio"/> Graphite <input type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Dark Bronze
10	5 714 10	
10	5 754 12	
10	5 714 52	
10	5 714 53	
10	5 714 51	
5	5 753 60	For 4" x 4" boxes <input type="radio"/> White <input type="radio"/> Soft Alu <input checked="" type="radio"/> Graphite <input type="radio"/> Champagne
5	5 714 00	
5	5 753 62	
5	5 753 64	



Support frames
and plates,
p. 45 and 54 to 63

Arteor™


mounting supports, special plates and mounting boxes




5 760 16



5 754 50



5 754 70

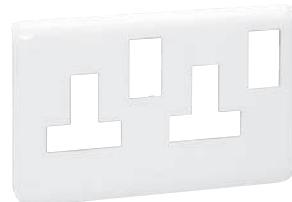

5 754 80



5 751 90



5 723 90



5 723 92



Support frame and plate selection charts **p. 54-63**


Pack	Cat.Nos	Panel mounting supports
10	5 760 15	For 1 to 3 mm thick panels For 1 module Clips into a 28 x 53.5 mm aperture
10	5 760 16	For 2 modules Clips into a 58 x 53.5 mm aperture
10	5 760 13	Modular support For mounting 2-module mechanisms on symmetrical rail
10	5 754 50	Dedicated plates for trunking 1-gang plate 2 modules (supplied with support frame)
5	5 754 60	2-gang plate 2 x 2 modules (supplied with support frame)
10	5 754 70	White plate for 1-gang 13 A switched socket
5	5 754 80	White plate for 2-gang 13 A switched socket
5	5 751 90	IP 44 plate For British and German standards For mounting in 1-gang box Support frame supplied

Pack	Cat.Nos	Flush-mounting boxes
1	6 890 36	For British standard 6 and 8-module plates and frames For 6 modules 211.4 x 75.7 x 50.8 mm
1	6 890 38	For 8 modules 231 x 75.7 x 50.8 mm
1	6 890 28	For 2 x 6 modules 212 x 143 x 42 mm
1	0 818 56	For 3 x 6 modules 212 x 212 x 42 mm
Pack	Cat.Nos	Surface-mounting boxes
10	5 723 90	For British, German and French standard For 2 modules - 1-gang 38 mm depth
25	5 723 92	For 4 modules 2 x 2 modules - 2-gang 48 mm depth (suitable for shaver sockets)
2	5 723 96	For 2 x 6 modules 38 mm depth

ARTEOR™

Hotel equipment at its best

Legrand hotel solutions are designed to improve customer loyalty and to increase profit through added value services.

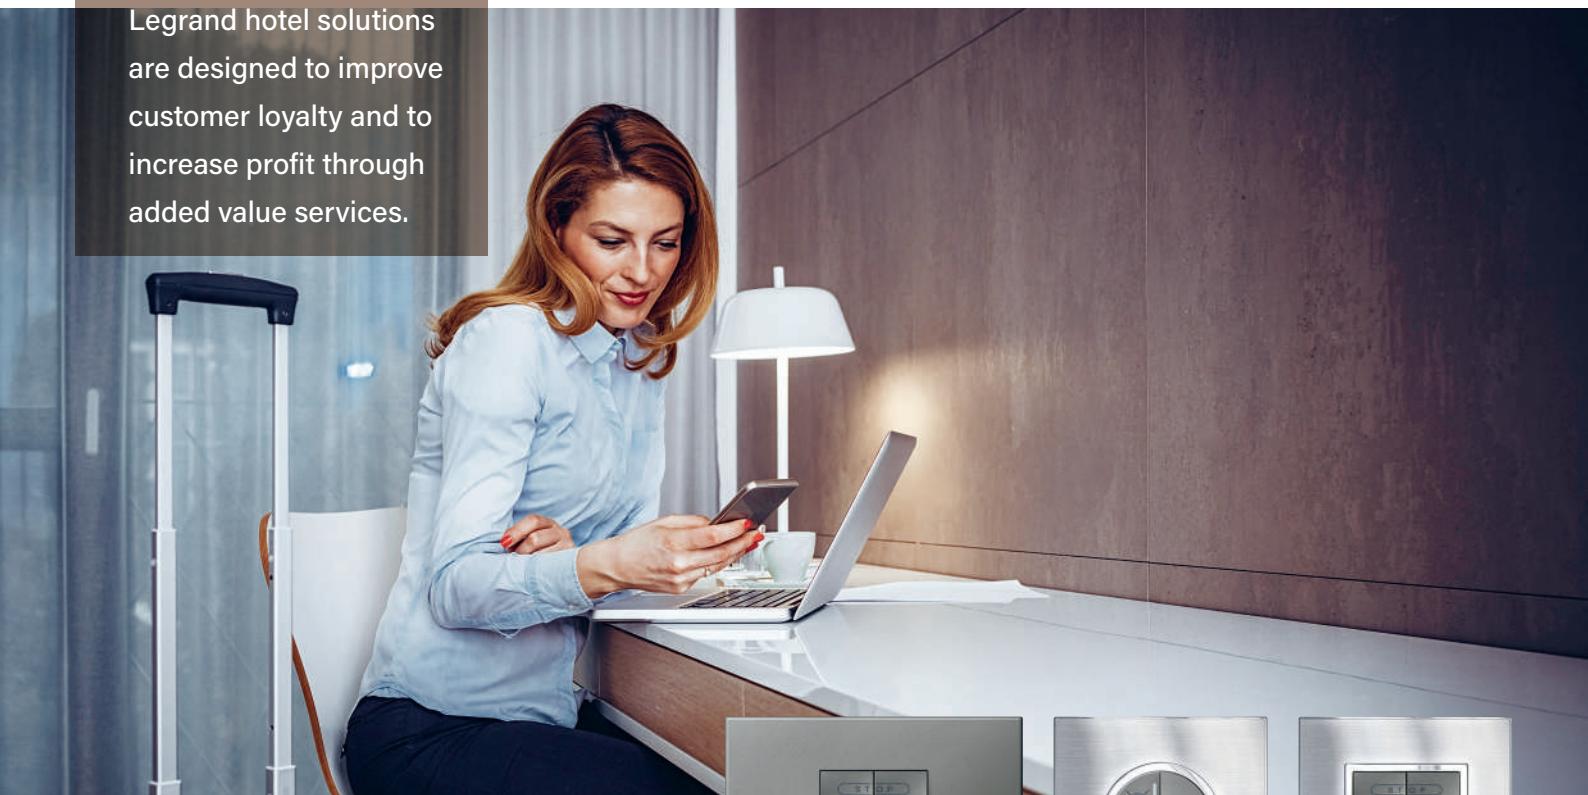

MASTER



Call indicators



Bedside controls for lights and curtains, USB charging options




Key card switch





From stand-alone products to guest room management solutions: Arteor hotel equipment makes your guests feel at ease and at home - allowing for a personalised in-room experience and a consistently high service level.

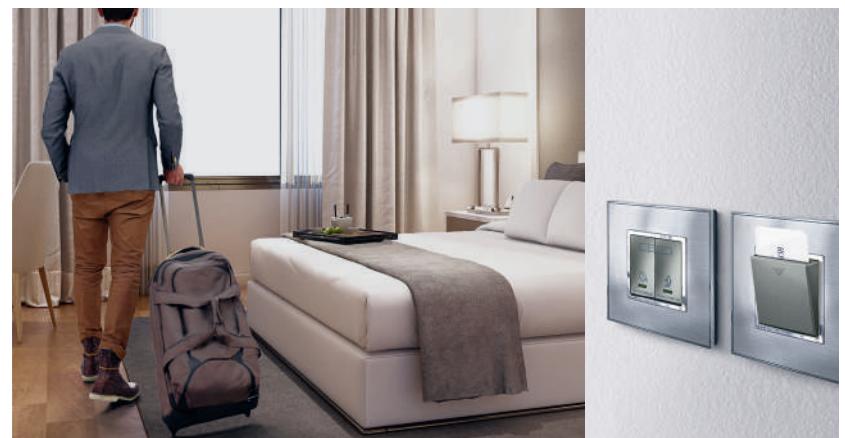


Illuminated sign



Shaver socket



Wireless charger

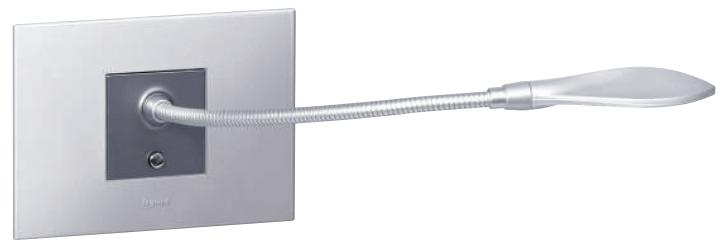

Reading light




Guest room management system

Whether for premium or midscale hotels: Legrand guest room management solutions allow you to welcome your guests with dedicated scenes and provide intuitive control of lights, curtains, shutters and temperature.

Find out more about UX for Upscale Hotel and UX One touch controls.



UX One touch controls

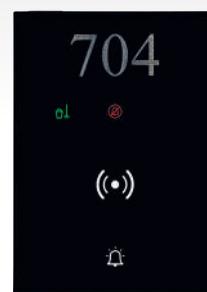

UX for Upscale Hotel range



Hotel equipment

lighting, electric roller blinds, curtain control - square version



5 732 84



5 737 22



5 732 34

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Lighting control
		Master switch - 2 modules 2-way double pole 20 AX - 250 V~ for general control: all ON / all OFF <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
10	5 732 84	
10	5 737 84	
10	5 737 89	
10	5 737 88	
		Master push-button - 2 modules 2-way 6 A - 250 V~ for general control: all ON/ all OFF <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
10	5 732 86	
10	5 737 86	
10	5 737 99	
10	5 737 98	
		Switch for bed lights - 2 x 1 module 2 x 2-way switch - 10 AX - 250 V~ <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
10	5 732 94	
5	5 737 94	
5	5 737 63	
5	5 737 62	
		Push-button for bed lights - 2 x 1 module 2 x 2-way push-button - 6 A - 250 V~ <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5 732 96	
5	5 737 96	
		Electric roller blinds control - 250 VA
		Double switch 10 A - 2 modules For direct control of a motor (mechanism with fixed positions) <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5 732 22	
10	5 737 22	
10	5 737 76	
10	5 737 75	
		Double push-button 10 A - 2 modules For control via automatic box (N/O mechanism) <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5 732 24	
10	5 737 24	
		Curtain control - 250 VA
		Double switch 10 A - 2 modules For direct control of a motor (mechanism with fixed positions) <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5 732 34	
10	5 737 34	
		Double push-button 10 A - 2 modules For control via automatic box (N/O mechanism) <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5 732 36	
10	5 737 36	



Support frames
and plates,
p. 45 and 54 to 63



Hotel equipment

lighting, electric roller blinds, curtain control - round version



5 732 95




5 737 35

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Lighting control
		Master switch - 2 modules 2-way double pole 20 AX - 250 V~ for general control: all ON / all OFF <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5 732 85	
10	5 737 85	
		Master push-button - 2 modules 2-way 6 A - 250 V~ for general control: all ON/ all OFF <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5 732 87	
10	5 737 87	
		Switch for bed lights - 2 x 1 module 2 x 2-way switch - 10 AX - 250 V~ <input type="radio"/> White <input checked="" type="radio"/> Magnesium
5	5 732 95	
5	5 737 95	
		Push-button for bed lights - 2 x 1 module 2 x 2-way push-button - 6 A - 250 V~ <input type="radio"/> White <input checked="" type="radio"/> Magnesium
5	5 732 97	
5	5 737 97	
		Electric roller blinds control - 250 VA
		Double switch 10 A - 2 modules For direct control of a motor (mechanism with fixed positions) <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5 732 23	
10	5 737 23	
		Double push-button 10 A - 2 modules For control via automatic box (N/O mechanism) <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5 732 25	
10	5 737 25	
		Curtain control - 250 VA
		Double switch 10 A - 2 modules For direct control of a motor (mechanism with fixed positions) <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5 732 35	
10	5 737 35	
		Double push-button 10 A - 2 modules For control via automatic box (N/O mechanism) <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5 732 37	
10	5 737 37	

Hotel equipment

shaver sockets, key card switches, key cards, chimes, buzzers

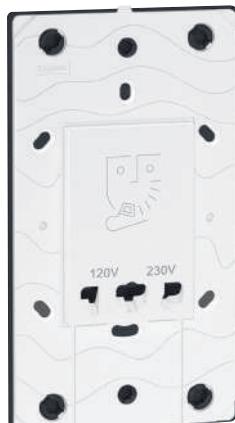

5 721 53



5 710 55



5 722 53



0 767 11

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)


Pack	Cat.Nos	Shaver sockets	Pack	Cat.Nos	Key cards
		<p>Conform to BS EN 61558-2-5. IP 24 For use with European, British, American, Australian 2-pin plugs. Screwless live and neutral terminals Double wound isolating transformer Automatic self-resetting overload feature Plug insertion operates micro-switch which energises transformer To be equipped with BS 2-gang - 3-module plates (p. 54-55) For flush-mounting boxes, use BS 2-gang box depth 48 mm, US type, Italian type boxes depth 48 mm or Cat.No 0 801 55 Power supply: 230 V - 50/60 Hz. 3 modules</p> <p>230 V / 120-230 V</p> <ul style="list-style-type: none"> <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu <input type="radio"/> White - with earth connector <input checked="" type="radio"/> Magnesium - with earth connector <input type="radio"/> Champagne - with earth connector <input type="radio"/> Soft Alu - with earth connector 	<p>10</p> <p>10</p> <p>10</p>	<p>5 722 59</p> <p>5 727 59</p> <p>0 767 11</p>	<p>For mechanical key card switches Enable use of key fob switches in hotels with key locks Supplied complete with a label holder for individual hotel identification</p> <ul style="list-style-type: none"> <input type="radio"/> White <input checked="" type="radio"/> Magnesium <p>For RFID key card switches MIFARE contactless badge card ISO format (50 x 80 mm) Chip: 13.56 MHz Standard 1 KB memory</p>
1	5 721 55		1	5 722 06	<p>Chimes 230 V - 50 Hz Consumption: 65 mA 1 melody Tone level: 73 dB at 1 m Compatible with push-button Cat.No 0 416 45</p>
1	5 726 55		1	5 722 46	<ul style="list-style-type: none"> <input type="radio"/> White <input checked="" type="radio"/> Magnesium
1	5 726 66				
1	5 726 65				
1	5 721 53				
1	5 726 53				
1	5 727 64				
1	5 727 62				
		Mechanical key card switches 230 V For energizing a circuit by inserting a key fob Cat.No 5 722 59 or a smart card (access card for a hotel room) Example of use: hotel room power supply only when guest is present Time-delay of approx. 30 sec. after card removal Can be equipped with single pole latching relay Cat.Nos 5 722 27 or 5 727 27 (p. 30) 2 modules			
1	5 722 30	<ul style="list-style-type: none"> <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu 			
1	5 727 30				
1	5 700 55				
1	5 710 55				
		Key card switches RFID For energizing a circuit for example meeting room, office, hotel room... Works only with ISO type contactless key card Cat.No 0 767 11 or other ISO type 13.56 MHz key card Time-delay of approx. 30 sec. after card removal Low capacity contact 230 V - 30 VA Lighting of the slot by LED. 2 modules			
1	5 722 53	<ul style="list-style-type: none"> <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu 	10	5 722 04	230 V - 1 module
1	5 727 53		5	5 727 04	<ul style="list-style-type: none"> <input type="radio"/> White <input checked="" type="radio"/> Magnesium
1	5 727 37		10	5 722 07	230 V - 2 modules
1	5 722 37		10	5 722 47	<ul style="list-style-type: none"> <input type="radio"/> White <input checked="" type="radio"/> Magnesium

Hotel equipment

call indicators, illuminated signs, reading light - square version



5 737 78

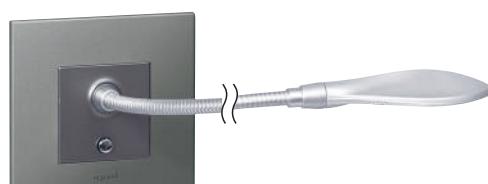

5 727 57 + plate Magnesium 5 713 12

Hotel equipment

call indicators, buzzers - round version



5 725 67

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 45) and plates (p. 54-63)

Pack	Cat.Nos	Hotel bedroom call indicators
		Enable the resident to inform hotel staff of the room status Two settings are possible: - Do not disturb - Please clean the room 2 x 1 module
5	5 720 57	Indicator for corridor Indicator lamp and bell push Installed in the corridor, display calls Supplied with LED
5	5 725 57	<input type="radio"/> White
5	5 737 78	<input checked="" type="radio"/> Magnesium
5	5 737 77	<input type="radio"/> Champagne
		<input type="radio"/> Soft Alu
5	5 720 54	Internal control unit Allows the user to select the desired setting Supplied with LED
5	5 725 54	<input type="radio"/> White
5	5 737 82	<input checked="" type="radio"/> Magnesium
5	5 737 81	<input type="radio"/> Champagne
		<input type="radio"/> Soft Alu

Pack	Cat.Nos	Illuminated signs
		Mechanisms integrating LEDs and a pivoting window that can take customised labels (printed using a simple text editor on transparent printing paper) 2 modules
5	5 722 24	Green or red LEDs Sign with 2-state LEDs with choice of green or red configurable on the mechanism. Power level: 1 W
5	5 727 24	<input type="radio"/> White
5	5 727 46	<input checked="" type="radio"/> Magnesium
5	5 727 45	<input type="radio"/> Champagne
		<input type="radio"/> Soft Alu
5	5 722 25	Blue LEDs Sign with blue LEDs
5	5 727 22	A choice of 2 power levels: 0.2 or 1 W
5	5 727 48	<input type="radio"/> White
5	5 727 47	<input checked="" type="radio"/> Magnesium
		<input type="radio"/> Champagne
		<input type="radio"/> Soft Alu

Pack	Cat.Nos	Reading lights
		Fitted with maintenance-free LEDs LED colours: 3000 K (neutral white) 230 V~ power supply - energy class A Screw terminals. For installation in the bedhead Offers directional lighting. Equipped with a flexible cable so the head can swivel Built-in dimmer. Consumption 3.3 W Luminous flux 110 lumen (equivalent to 15 W incandescent) Service life 40000 hours. For installation in box depth 40 mm min. 2 modules
1	5 722 57	<input type="radio"/> White
1	5 727 57	<input checked="" type="radio"/> Magnesium
		<input type="radio"/> Champagne
		<input type="radio"/> Soft Alu

Pack	Cat.Nos	Hotel bedroom call indicators
		Enable the resident to inform hotel staff of the room status Two settings are possible: - Do not disturb - Please clean the room 2 x 1 module
5	5 720 67	Indicator for corridor Indicator lamp and bell push Installed in the corridor, display calls Supplied with LED
5	5 725 67	<input type="radio"/> White
5	5 727 31	<input checked="" type="radio"/> Magnesium
		<input type="radio"/> Champagne
		<input type="radio"/> Soft Alu
5	5 720 74	Internal control unit Allows the user to select the desired setting Supplied with LED
5	5 725 74	<input type="radio"/> White
5	5 727 49	<input checked="" type="radio"/> Magnesium
		<input type="radio"/> Champagne
		<input type="radio"/> Soft Alu
10	5 722 08	Buzzers 230 V - 2 modules
10	5 722 48	<input type="radio"/> White
		<input checked="" type="radio"/> Magnesium

Modular Arteor USB chargers
See p. 28



Arteor™

wireless power chargers



0 776 40L supplied with sticker



0 776 99L

Wireless power chargers for fast charging of a smartphone with a QI receiver

Power supply standby mode consumption < 0.07 %

Conform to the QI WPC standard (Wireless Power Consortium): certified for professional QI 1.2.3 projects

Conform to EN 62479 standard (EMF emissions)

Conform to ICNIRP specifications (health protection)

Do not interfere with other wireless signals (Zigbee, TNT, GSM, 4G, etc)

Pack	Cat.Nos	QI wireless charger - for integration into furniture
1	0 776 40L	<p>Specially designed for mounting horizontally on furniture For meeting rooms, offices, public areas, etc 80 mm drilling diameter, Aluminium colour Extra-slim with thickness < 1.5 mm Supplied with identification sticker diameter 85/110 mm, 2.5 m cord, fixing base and cable ties 110-240 V universal power supply Plugs conforming to European, BS, US, Australian/Chinese standards To be installed using a hole saw diameter 80 mm (Cat.No 0 885 08) 15 W - IP 44 / IK 08 charger</p>

Pack	Cat.Nos	Flush-mounted wireless charger - for public areas
1	0 776 99L	<p>10 W wireless charger Specially designed for public buildings, passageways or transit areas, swimming pools, etc. IK 08 - IP 66 - Class II SELV Comes with 2 induction antennae for fast smartphone charging Recognition area: 50 x 80 mm Plate at an angle of 10° with non-slip coating to hold the terminal safely in place during charging Screws onto flush-mounting box with 60 mm fixing centres, min. depth 40 mm, French, German or British standard Can also be fixed in at 4 points Can be mounted on rectangular boxes and outdoors 110/230 VA Phase + Neutral power supply Mechanism supplied with cover plate, attached with 2 Torx screws at the side</p> <ul style="list-style-type: none"> ● Aluminium colour Dimensions: 141 x 95 x 51 mm 2 x 2.5 mm² terminals

Arteor™

wireless power chargers

Wireless power charging

A Legrand innovation for easy charging

Using wireless energy transfer
No need for cords and connectors

An open international standard:


Wireless Power Consortium: 750 members, ensuring interoperability with induction-compatible phones

QI: global standard adopted by vehicle manufacturers and cafés/hotels/restaurants

Products certified for professional QI 1.2.3 projects

Ergonomically designed to suit different environments



Horizontal charging on furniture

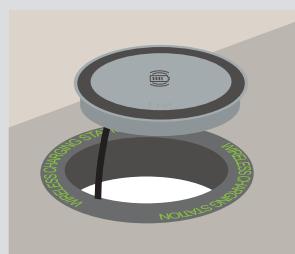

Insertion in an 80 mm diameter cut-out / Fixed into furniture
External power supply with 2.5 m cord

Vertical charging on a wall in public areas (semi-flush-mounted)

Ideal for indoor or outdoor locations

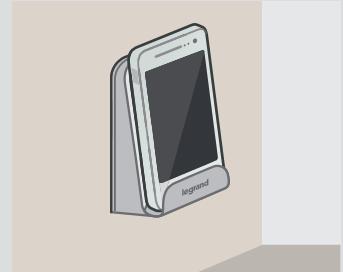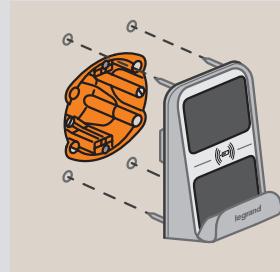

Excellent resistance to impacts (IK 08) and adverse weather conditions (IP 66)

Can be fixed directly on the flush-mounting box or for extra strength drilled with anchor bolts

Arteor™ British standard plate selection charts

60.3 mm fixing centres - flush-mounting boxes, support frames and plates

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES					
				Neutral					
				White	Soft Alu	Graphite	Magnesium	Champagne	Dark Bronze
SQUARE VERSION									
1 module	1-gang	5 760 03		5 752 00	5 713 01	5 752 02	5 713 11	5 713 21	5 713 31
2 modules		5 760 03 5 760 01 ⁽¹⁾		5 752 10	5 713 02	5 752 12	5 713 12	5 713 22	5 713 32
3 modules	1-gang	5 760 01 ⁽²⁾		5 751 60	5 713 03	5 751 62	5 713 13	5 713 23	5 713 33
3 modules and shaver sockets	2-gang	5 760 02		5 750 70	5 713 05	5 750 72	5 713 15	5 713 25	5 713 35
4 modules	2-gang	5 760 00		5 750 80	5 713 04	5 750 82	5 713 14	5 713 24	5 713 34
6 modules	6 890 36	Supplied with support frame		5 753 70	5 713 06	5 753 72	5 713 16	5 713 26	5 713 36
8 modules	6 890 38	Supplied with support frame		5 767 00	5 713 08	5 767 02	5 713 18	5 713 28	5 713 38
2 x 6 modules	6 890 28	Supplied with support frame		5 753 90	5 716 00	5 753 92	5 716 02	5 716 04	5 716 06
3 x 6 modules	0 818 56	Supplied with support frame		5 754 00	5 716 01	5 754 02	5 716 03	5 716 05	5 716 07
Blanking cover plate	1-gang	5 760 03 5 760 01		5 751 30	5 716 08	5 751 32	5 716 10	5 716 12	5 716 14
Blanking cover plate	2-gang	5 760 02		5 751 40	5 716 09	5 751 42	5 716 11	5 716 13	5 716 15
ROUND VERSION									
2 modules	1-gang	5 760 03		5 756 10	5 716 16	5 756 12	5 716 21	-	
3 modules	2-gang	5 760 02		5 755 40	5 716 18	5 755 42	5 716 23	-	
3 modules - 1-gang	1-gang	5 760 01		5 755 60	5 716 19	5 755 62	5 716 24	-	
4 modules	2-gang	5 760 00		5 755 50	5 716 17	5 755 52	5 716 22	-	
6 modules	6 890 36	Supplied with support		5 767 40	5 716 20	5 767 42	5 716 25	-	

1: Use 5 760 01 support frame for 2 module mechanisms to be mounted on 3 module support frame (see mention in catalogue page)

2 : Support frame not needed for use with British standard connected socket outlets Cat.Nos 574256, 574257, 574258, 574259

PLATES

Mirror		Brushed Metal				Reflective Metal			Wood	Signature
Mirror White	Mirror Black	Stainless Steel	Gold Brass	Pink Champagne	Black	Stainless Steel	Black	Gold	Grey Oak	Cube
5 752 04	5 752 03	5 752 06	5 761 00	5 713 51	5 713 41	5 713 61	5 713 81	5 713 71	5 713 91	5 714 01
5 752 14	5 752 13	5 752 16	5 761 20	5 713 52	5 713 42	5 713 62	5 713 82	5 713 72	5 713 92	5 714 02
5 751 64	5 751 63	5 751 66	5 761 80	5 713 53	5 713 43	5 713 63	5 713 83	5 713 73	5 713 93	5 714 03
5 750 74	5 750 73	5 750 76	5 761 60	5 713 55	5 713 45	5 713 65	5 713 85	5 713 75	5 713 95	5 714 05
5 750 84	5 750 83	5 750 86	5 761 40	5 713 54	5 713 44	5 713 64	5 713 84	5 713 74	5 713 94	5 714 04
5 753 74	5 753 73	5 753 76	5 763 70	5 713 56	5 713 46	5 713 66	5 713 86	5 713 76	5 713 96	5 714 06
5 767 04	5 767 03	5 767 06	5 767 10	5 713 58	5 713 48	5 713 68	5 713 88	5 713 78	5 713 98	5 714 08
-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-
5 756 14	5 756 13	5 756 16	5 761 10	5 716 30	5 716 26	-	-	-	-	-
5 755 44	5 755 43	5 755 46	5 761 50	5 716 32	5 716 28	-	-	-	-	-
5 755 64	5 755 63	5 755 66	5 761 70	5 716 33	5 716 29	-	-	-	-	-
5 755 54	5 755 53	5 755 56	-	5 716 31	5 716 27	-	-	-	-	-
5 767 44	5 767 43	-	-	-	-	-	-	-	-	-

Arteor™ British standard special plates

60.3 mm fixing centres - flush-mounting boxes and plates

	Support frames	Plates	PLATES					
			Neutral					
			White	Soft Alu	Graphite	Magnesium	Champagne	Dark Bronze
FOR BRITISH STANDARD SOCKET OUTLETS								
For 5 A/13 A switched socket outlet - 1-gang	Not needed		5 750 90	5 713 07	5 750 92	5 713 17	5 713 27	5 713 37
For 13 A twin switched socket outlet - 2-gang	Not needed		5 751 00	5 713 09	5 751 02	5 713 19	5 713 29	5 713 39
For BS connected socket outlets 13 A, switched, 2-gang	Not needed		5 712 10	5 712 11	5 712 12	5 712 13	5 712 14	5 712 15
FOR BRITISH STANDARD SOCKET OUTLETS WITH USB CHARGER								
For 1-gang single pole switched USB Type-A 3 A - 5 V _⎓ - 15 W	Not needed		5 751 11A	5 751 34A	5 751 33A	5 751 35A	5 751 36A	5 751 37A
For 1-gang single pole switched USB Type-C 18 W	Not needed		5 754 52	5 754 53	5 754 54	5 754 55	5 754 56	5 754 57
For 1-gang single pole unswitched USB Type-A 3 A - 5 V _⎓ - 15 W	Not needed		5 751 13A	5 751 89A	5 751 88A	5 751 93A	5 751 94A	5 751 95A
For 1-gang single pole unswitched USB Type-C 18 W	Not needed		5 754 59	5 754 61	5 754 62	5 754 63	5 754 64	5 754 65
For 2-gang single pole switched USB Type-A + Type-C 3 A - 5 V _⎓ - 15 W	Not needed		5 751 17	5 751 52	5 751 51	5 751 53	5 751 54	5 751 55
For 2-gang single pole switched USB Type-A + Type-C 27 W	Not needed		5 754 37	5 754 39	5 754 40	5 754 41	5 754 42	5 754 43
FOR MULTISTANDARD SOCKET OUTLETS WITH USB CHARGER								
For 1-gang switched socket outlet USB Type-A 3 A - 5 V _⎓ - 15 W	Not needed		5 751 10A	5 751 44A	5 751 43A	5 751 45A	5 751 46A	5 751 47A
For 1-gang switched socket outlet USB Type-C 18 W	Not needed		5 754 67	5 754 68	5 754 69	5 754 71	5 754 72	5 754 73
For 2-gang switched socket outlet USB Type-A + Type-C 3 A - 5 V _⎓ - 15 W	Not needed		5 751 70	5 751 72	5 751 71	5 751 73	5 751 74	5 751 75
For 2-gang switched socket outlet USB Type-A + Type-C 27 W	Not needed		5 754 44	5 754 46	5 754 45	5 754 47	5 754 48	5 754 49
FOR FUSED CONNECTION UNIT AND COOKER UNIT								
For 13 A fused connection unit switched	Not needed		5 751 20	5 713 10	5 751 22	5 713 20	5 713 30	5 713 40
For cooker unit Cat.No 5 720 88	Not needed		5 751 50	-	-	-	-	-

PLATES

Mirror		Brushed Metal				Reflective Metal			Wood	Signature
Mirror White	Mirror Black	Stainless Steel	Gold Brass	Pink Champagne	Black	Stainless Steel	Black	Gold	Grey Oak	Cube
5 750 94	5 750 93	5 750 96	5 762 10	5 713 57	5 713 47	5 713 67	5 713 87	5 713 77	5 713 97	5 714 07
5 751 04	5 751 03	5 751 06	5 762 00	5 713 59	5 713 49	5 713 69	5 713 89	5 713 79	5 713 99	5 714 09
5 712 16	5 712 17	5 712 18	5 712 19	5 712 20	5 712 21	5 712 22	5 712 23	5 712 24	5 712 25	5 712 26
-	-	5 751 12A	-	-	-	-	-	-	-	-
-	-	5 754 58	-	-	-	-	-	-	-	-
-	-	5 751 14A	-	-	-	-	-	-	-	-
-	-	5 754 66	-	-	-	-	-	-	-	-
-	-	5 751 18	-	-	-	-	-	-	-	-
-	-	5 754 38	-	-	-	-	-	-	-	-
-	-	5 751 16A	-	-	-	-	-	-	-	-
-	-	5 754 74	-	-	-	-	-	-	-	-
-	-	5 751 76	-	-	-	-	-	-	-	-
-	-	5 754 51	-	-	-	-	-	-	-	-
5 751 24	5 751 23	5 751 26	5 761 90	5 713 60	5 713 50	5 713 70	5 713 90	5 713 80	-	-
-	-	-	-	-	-	-	-	-	-	-

Arteor™ Italian / US standards plate selection charts

83.5 mm fixing centres - flush-mounting boxes, support frames and plates

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES					
				Neutral					
				White	Soft Alu	Graphite	Magnesium	Champagne	Dark Bronze
SQUARE VERSION									
1 module	0 800 49	5 760 40		5 752 20	5 714 11	5 752 22	5 752 27	5 714 31	5 714 41
2 modules	0 800 49	5 760 40		5 752 30	5 714 12	5 752 32	5 752 37	5 714 32	5 714 42
3 modules	0 800 49	5 760 40		5 750 10	5 714 13	5 750 12	5 750 17	5 714 33	5 714 43
Blanking cover plate	2" x 4"	5 760 40		5 754 10	5 714 10	5 754 12	5 714 52	5 714 53	5 714 51
4 modules	0 800 42	5 760 11		5 750 30	5 714 14	5 750 32	5 750 37	5 714 34	5 714 44
6 modules	0 800 43	5 760 12		5 750 40	5 714 15	5 750 42	5 750 47	5 714 35	5 714 45
ROUND VERSION									
2 modules	0 800 49	5 760 40		5 756 20	5 716 34	5 756 22	5 716 36	-	-
3 modules	0 800 49	5 760 40		5 755 00	5 716 35	5 755 02	5 716 37	-	-
4 modules	0 800 42	2 x 5 760 21		5 755 10	5 716 59	5 755 12	5 716 62	-	-
6 modules	0 800 43	3 x 5 760 21		5 755 20	5 716 60	5 755 22	5 716 63	-	-

PLATES

Mirror		Brushed Metal				Reflective Metal			Wood	Signature
Mirror White	Mirror Black	Stainless Steel	Gold Brass	Pink Champagne	Black	Stainless Steel	Black	Gold	Grey Oak	Cube
5 752 44	5 752 43	5 752 46	5 764 10	5 714 26	5 714 16	5 714 36	5 714 56	5 714 46	5 714 66	5 714 76
5 752 54	5 752 53	5 752 56	5 764 30	5 714 27	5 714 17	5 714 37	5 714 57	5 714 47	5 714 67	5 714 77
5 752 74	5 752 73	5 752 76	5 764 50	5 714 28	5 714 18	5 714 38	5 714 58	5 714 48	5 714 68	5 714 78
-	-	-	-	-	-	-	-	-	-	-
5 750 34	5 750 33	5 750 36	5 762 70	5 714 29	5 714 19	5 714 39	5 714 59	5 714 49	5 714 69	-
5 750 44	5 750 43	5 750 46	5 762 80	5 714 30	5 714 20	5 714 40	5 714 60	5 714 50	5 714 70	-
5 756 34	5 756 33	5 756 36	5 764 20	5 716 40	5 716 38	-	-	-	-	-
5 756 54	5 756 53	5 756 56	5 764 40	5 716 41	5 716 39	-	-	-	-	-
5 755 14	5 755 13	5 755 16	5 762 50	5 716 67	5 716 65	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-

Arteor™ American and South African standard plate selection charts

83.5 mm fixing centres - flush-mounting boxes, support frames and plates

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES					
				Neutral					
				White	Soft Alu	Graphite	Magnesium	Champagne	Dark Bronze
SQUARE VERSION									
1 vertical module	2" x 4"	5 760 30		5 767 20	5 714 85	5 767 22	5 714 95	5 715 05	5 715 15
1 horizontal module		5 760 40		5 752 40	5 714 81	5 752 42	5 714 91	5 715 01	5 715 11
2 modules		5 760 30 ⁽¹⁾ 5 760 40		5 752 50	5 714 82	5 752 52	5 714 92	5 715 02	5 715 12
3 modules		5 760 40		5 752 70	5 714 83	5 752 72	5 714 93	5 715 03	5 715 13
2 modules	4" x 4"	5 760 31		5 752 60	5 714 86	5 752 62	5 714 96	5 715 06	5 715 16
3 modules		5 760 31		5 752 80	5 714 87	5 752 82	5 714 97	5 715 07	5 715 17
4 modules		5 760 31		5 752 90	5 714 84	5 752 92	5 714 94	5 715 04	5 715 14
2 x 3 modules		5 760 32		5 753 00	5 714 88	5 753 02	5 714 98	5 715 08	5 715 18
Blanking cover plate Italian / US standards	2" x 4"	5 760 40		5 754 10	5 714 10	5 754 12	5 714 52	5 714 53	5 714 51
Blanking cover plate US standard	4" x 4"	5 760 31		5 753 60	5 714 00	5 753 62	-	5 753 64	-
ROUND VERSION									
2 modules	2" x 4"	5 760 30 ⁽¹⁾ 5 760 40		5 756 30	5 716 42	5 756 32	5 716 47	-	-
3 modules		5 760 40		5 756 50	5 716 43	5 756 52	5 716 48	-	-
2 modules	4" x 4"	5 760 31		5 756 40	5 716 44	5 756 42	5 716 49	-	-
3 modules				5 756 60	5 716 45	5 756 62	5 716 50	-	-
2 x 3 modules		5 760 32		5 756 70	5 716 46	5 756 72	5 716 51	-	-

1: Only for 2 modules electronic functions

PLATES

Mirror		Brushed Metal				Reflective Metal			Wood	Signature
Mirror White	Mirror Black	Stainless Steel	Gold Brass	Pink Champagne	Black	Stainless Steel	Black	Gold	Grey Oak	Cube
5 767 24	5 767 23	5 767 26	5 767 30	5 715 26	5 715 21	5 715 31	5 715 41	5 715 36	5 715 46	5 715 51
5 752 44	5 752 43	5 752 46	5 764 10	5 714 26	5 714 16	5 714 36	5 714 56	5 714 46	5 714 66	5 714 76
5 752 54	5 752 53	5 752 56	5 764 30	5 714 27	5 714 17	5 714 37	5 714 57	5 714 47	5 714 67	5 714 77
5 752 74	5 752 73	5 752 76	5 764 50	5 714 28	5 714 18	5 714 38	5 714 58	5 714 48	5 714 68	5 714 78
5 752 64	5 752 63	5 752 66	5 766 20	5 715 27	5 715 22	5 715 32	5 715 42	5 715 37	5 715 47	5 715 52
5 752 84	5 752 83	5 752 86	5 766 40	5 715 28	5 715 23	5 715 33	5 715 43	5 715 38	5 715 48	5 715 53
5 752 94	5 752 93	5 752 96	-	5 715 29	5 715 24	5 715 34	5 715 44	5 715 39	-	-
5 753 04	5 753 03	5 753 06	5 766 70	5 715 30	5 715 25	5 715 35	5 715 45	5 715 40	-	-
-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-
5 756 34	5 756 33	5 756 36	5 764 20	5 716 40	5 716 38	-	-	-	-	-
5 756 54	5 756 53	5 756 56	5 764 40	5 716 41	5 716 39	-	-	-	-	-
5 756 44	5 756 43	5 756 46	5 766 10	5 716 55	5 716 52	-	-	-	-	-
5 756 64	5 756 63	5 756 66	5 766 30	5 716 56	5 716 53	-	-	-	-	-
5 756 74	5 756 73	5 756 76	-	5 716 57	5 716 54	-	-	-	-	-

Arteor™ German and French standard plate selection charts

60 mm fixing centres - flush and surface-mounting boxes, support frames and plates

Number of modules per mechanism	Surface-mounting boxes	Flush-mounting boxes for dry partitions	Support frames	Plates	PLATES					
					Neutral					
					White	Soft Alu	Graphite	Magnesium	Champagne	Dark Bronze
SQUARE VERSION										
1 module	-	0 800 41	5 760 21 (screws) 5 760 20 (claws)		5 765 40	5 715 61	5 765 52	5 765 47	5 715 81	5 715 91
2 modules	5 723 90	0 800 41	5 760 21 (screws) 5 760 20 (claws)		5 765 60	5 715 62	5 765 62	5 765 67	5 715 82	5 715 92
3 modules	-	0 800 49	5 760 40		5 750 10	5 714 13	5 750 12	5 750 17	5 714 33	5 714 43
2 x 2 modules	5 723 92	0 800 42	2 x 5 760 21		5 750 20	5 715 63	5 750 22	5 750 27	5 715 83	5 715 93
6 modules	-	0 800 43	5 760 12		5 750 40	5 714 15	5 750 42	5 750 47	5 714 35	5 714 45
2 x 6 modules	5 723 96	0 801 26	5 760 22		5 750 60	5 715 65	5 750 62	5 715 75	5 715 85	5 715 95
4 modules	5 723 92	0 800 42	5 760 11		5 750 30	5 714 14	5 750 32	5 750 37	5 714 34	5 714 44
3 x 2 modules	-	0 800 43	3 x 5 760 21		5 750 50	5 715 64	5 750 52	5 750 57	5 715 84	5 715 94
ROUND VERSION										
2 x 1 module 2 modules	5 723 90	0 800 41	5 760 21 (screws) 5 760 20 (claws)		5 756 00	5 716 58	5 756 02	5 716 61	-	-
2 x 2 modules	5 723 92	0 800 42	2 x 5 760 21		5 755 10	5 716 59	5 755 12	5 716 62	-	-
3 x 2 modules	-	0 800 43	3 x 5 760 21		5 755 20	5 716 60	5 755 22	5 716 63	-	-

PLATES

Mirror		Brushed Metal				Reflective Metal			Wood	Signature
Mirror White	Mirror Black	Stainless Steel	Gold Brass	Pink Champagne	Black	Stainless Steel	Black	Gold	Grey Oak	Cube
5 765 54	5 765 53	5 765 56	5 762 20	5 715 66	5 715 56	5 715 76	5 715 96	5 715 86	5 715 50	5 715 00
5 765 64	5 765 63	5 765 66	5 762 40	5 715 67	5 715 57	5 715 77	5 715 97	5 715 87	5 715 60	5 715 80
5 752 74	5 752 73	5 752 76	5 764 50	5 714 28	5 714 18	5 714 38	5 714 58	5 714 48	5 714 68	5 714 78
5 750 24	5 750 23	5 750 26	5 762 60	5 715 68	5 715 58	5 715 78	5 715 98	5 715 88	5 715 70	5 715 90
5 750 44	5 750 43	5 750 46	5 762 80	5 714 30	5 714 20	5 714 40	5 714 60	5 714 50	5 714 70	-
-	-	-	-	-	-	-	-	-	-	-
5 750 34	5 750 33	5 750 36	5 762 70	5 714 29	5 714 19	5 714 39	5 714 59	5 714 49	5 714 69	-
5 750 54	5 750 53	5 750 56	-	5 715 69	5 715 59	5 715 79	5 715 99	5 715 89	-	-
5 756 04	5 756 03	5 756 06	5 762 30	5 716 66	5 716 64	-	-	-	-	-
5 755 14	5 755 13	5 755 16	5 762 50	5 716 67	5 716 65	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-



FOLLOW US
ALSO ON

legrand.com.sg

facebook.com/legrandsingapore

linkedin.com/company/legrand-s-pte-ltd

legrand

Singapore

17 Neythal Road,
Singapore 628582

: +65 6416 1660

Fax: +65 6416 1580

www.legrand.com.sg